

# **State of Ohio Energy Efficiency Technical Reference Manual**

**Including  
Predetermined Savings Values  
and Protocols for Determining Energy and Demand Savings**

**Prepared for the Public Utilities Commission of Ohio  
by Vermont Energy Investment Corporation  
August 6, 2010**

The 2010 Ohio TRM was prepared for the Public Utilities Commission of Ohio by Vermont Energy Investment Corporation (VEIC), with contributions from the following:

***Vermont Energy Investment Corporation***

Cheryl Jenkins, Project Manager; [cjenkins@veic.org](mailto:cjenkins@veic.org)  
Sam Dent  
Nick Lange  
Leslie Badger  
Chris Badger  
255 S. Champlain St.  
Burlington, VT 05401  
(802) 658-6060 x1103; [www.veic.org](http://www.veic.org)

***Energy Futures Group Inc.***

Chris Neme  
Richard Faesy  
P.O. Box 587  
Hinesburg, Vermont 05461  
(802) 482-5001

***Optimal Energy Inc.***

Steve Bower  
Matt Socks  
Cliff McDonald  
Sam Huntington  
Alek Antczak  
14 School Street, Suite 203-C  
Bristol, VT 05443  
(802) 453-5100; [www.optenergy.com](http://www.optenergy.com)

***Cx Associates, LLC***

Jennifer Chiodo  
Eveline Killian  
110 Main Street, Studio 1B  
Burlington, VT 05401  
(802) 861-2715 ; [www.cx-assoc.com](http://www.cx-assoc.com)

***Resource Insight Inc.***

Paul Chernick  
Five Water Street  
Arlington, MA 02476  
(781) 646-1505; [www.resourceinsight.com](http://www.resourceinsight.com)

# 2010 Ohio Technical Reference Manual

## Table of Contents

<b>I. Introduction .....</b>	<b>6</b>
Purpose of the TRM .....	7
Use of the TRM – General Format .....	7
Use of the TRM – Common Definitions and Assumptions .....	8
 <b>II. Residential Market Sector .....</b>	 <b>11</b>
Residential ENERGY STAR Compact Fluorescent Lamp (CFL) (Time of Sale) .....	11
Residential Direct Install - ENERGY STAR Compact Fluorescent Lamp (CFL) (Early Replacement) .....	17
Refrigerator and/or Freezer Retirement (Early Retirement) .....	23
Residential HVAC Maintenance/Tune Up (Retrofit) .....	26
Central Air Conditioning (Time of Sale) .....	30
Air Source Heat Pump (Time of Sale) .....	33
Attic/Roof/Ceiling Insulation (Retrofit) .....	36
ENERGY STAR Torchiere (Time of Sale) .....	40
Dedicated Pin Based Compact Fluorescent Lamp (CFL) Table Lamp (Time of Sale) .....	43
Ceiling Fan with ENERGY STAR Light Fixture (Time of Sale) .....	48
Efficient Refrigerator – ENERGY STAR and CEE TIER 2 (Time of Sale) .....	53
Refrigerator Replacement (Low Income, Early Replacement) .....	56
Clothes Washer – ENERGY STAR and CEE TIER 3 (Time of Sale) .....	59
Dehumidifier - ENERGY STAR (Time of Sale) .....	64
Room Air Conditioner - ENERGY STAR and CEE Tier 1 (Time of Sale) .....	67
Room Air Conditioner Replacement - ENERGY STAR (Low Income, Early Replacement) .....	70
Room Air Conditioner Recycling (Early Retirement) .....	73
Smart Strip Power Strip (Time of Sale) .....	76
Central Air Conditioning (Early Replacement) .....	78
Ground Source Heat Pumps (Time of Sale) .....	82
Heat Pump Water Heaters (Time of Sale) .....	86
Low Flow Faucet Aerator (Time of Sale or Early Replacement) .....	89
Low Flow Showerhead (Time of Sale or Early Replacement) .....	93
Domestic Hot Water Pipe Insulation (Retrofit) .....	97
Wall Insulation (Retrofit) .....	100
Air Sealing - Reduce Infiltration (Retrofit) .....	104
Duct Sealing (Retrofit) .....	108
ENERGY STAR Windows (Time of Sale) .....	115
Residential Two Speed / Variable Speed Pool Pumps (Time of Sale) .....	118
Residential Premium Efficiency Pool Pump Motor (Time of Sale) .....	120
Water Heaters (Time of Sale) .....	123
Programmable Thermostats (Time of Sale, Early Replacement) .....	125
Condensing Furnaces-Residential (Time of Sale) .....	127
Boilers (Time of Sale) .....	129
Water Heater Wrap (Early Replacement) .....	131
Solar Water Heater with Electric Backup (Retrofit) .....	133
Residential New Construction .....	136
Whole-House Residential Retrofit .....	144

<b>III. Commercial &amp; Industrial Market Sector.....</b>	<b>146</b>
Electric Chiller (Time of Sale) .....	146
C&I Lighting Controls (Time of Sale, Retrofit) .....	149
Lighting Systems (Non-Controls) (Time of Sale, New Construction) .....	153
Lighting Systems (Non-Controls) (Early Replacement, Retrofit) .....	168
Lighting Power Density Reduction (New Construction).....	175
LED Case Lighting with/without Motion Sensors (New Construction; Retrofit – Early Replacement) .....	179
LED Exit Signs (Retrofit).....	182
Traffic Signals (Retrofit) .....	184
Light Tube Commercial Skylight (Time of Sale).....	188
ENERGY STAR Room Air Conditioner for Commercial Use (Time of Sale).....	190
Single-Package and Split System Unitary Air Conditioners (Time of Sale, New Construction) .....	193
Heat Pump Systems (Time of Sale, New Construction).....	196
Outside Air Economizer with Dual-Enthalpy Sensors (Time of Sale, Retrofit – New Equipment) .....	200
Chilled Water Reset Controls (Retrofit – New Equipment).....	203
Variable Frequency Drives for HVAC Applications (Time of Sale, Retrofit – New Equipment) .....	206
Cool Roof (Retrofit – New Equipment) .....	209
Commercial Window Film (Retrofit – New Equipment) .....	213
Roof Insulation (Retrofit – New Equipment) .....	217
High Performance Glazing (Retrofit – Early Replacement).....	221
Engineered Nozzles (Time of Sale, Retrofit - Early Replacement).....	225
Insulated Pellet Dryers (Retrofit) .....	227
Injecting Molding Barrel Wrap (Retrofit – New Equipment) .....	230
ENERGY STAR Hot Food Holding Cabinet (Time of Sale).....	233
Steam Cookers (Time of Sale).....	235
ENERGY STAR Fryers (Time of Sale) .....	238
Combination Oven (Time of Sale) .....	240
Convection Oven (Time of Sale).....	243
ENERGY STAR Griddle (Time of Sale) .....	246
Spray Nozzles for Food Service (Retrofit).....	249
Refrigerated Case Covers (Time of Sale, New Construction, Retrofit – New Equipment) .....	252
Door Heater Controls for Cooler or Freezer (Time of Sale).....	254
ENERGY STAR Ice Machine (Time of Sale, New Construction).....	256
Commercial Solid Door Refrigerators & Freezers (Time of Sale, New Construction).....	259
Strip Curtain for Walk-in Coolers and Freezers (New Construction, Retrofit – New Equipment, Retrofit – Early Replacement) .....	262
Motors (Time of Sale) .....	264
High Efficiency Pumps and Pumping Efficiency Improvements (Retrofit).....	268
Efficient Air Compressors (Time of Sale).....	271
Efficient Air Compressors (Time of Sale).....	271
Vending Machine Occupancy Sensors (Time of Sale, New Construction, Retrofit – New Equipment) .....	273
Heat Pump Water Heaters (New Construction, Retrofit) .....	275
Commercial Clothes Washer (Time of Sale).....	277
Commercial Plug Load – Smart Strip Plug Outlets (Time of Use, Retrofit – New Equipment) .....	279

Plug Load Occupancy Sensor (Retrofit).....	281
Energy Efficient Furnace (Time of Sale, Retrofit – Early Replacement).....	283
High Efficiency Storage Tank Water Heater (Time of Sale, Retrofit – Early Replacement) .....	285
Tankless Water Heaters (Time of Sale, Retrofit – Early Replacement).....	287
Stack Damper (Retrofit – New Equipment) .....	290
Natural Gas-Fired Infrared Heater (Time of Sale).....	292
Energy Efficient Boiler (Time of Sale) .....	294
<b>IV. Protocols for Custom Commercial &amp; Industrial Projects .....</b>	<b>296</b>
C&I Equipment Replacement – Custom Measure Analysis Protocol .....	296
C&I Retrofit – Custom Measure Analysis Protocol .....	311
C&I New Construction – Custom Measure Analysis Protocol .....	327
<b>V. Protocols for Transmission &amp; Distribution Projects.....</b>	<b>339</b>
T&D Loss Reductions – Mass Plant Replacement and Expansion Analysis Protocol.....	339
T&D Loss Reductions – Mass Plant Retrofit Analysis Protocol.....	343
T&D Loss Reductions – Large Customer Connection Analysis Protocol.....	347
T&D Loss Reductions – Substation Transformer Analysis Protocol .....	351
T&D Loss Reductions – System Reconfiguration Analysis Protocol .....	355
T&D Loss Reductions – Voltage Conversion Analysis Protocol.....	359
T&D Loss Reductions – Conductor Analysis Protocol .....	363
<b>VI. Appendices.....</b>	<b>367</b>
Appendix A – Prototypical Building Energy Simulation Model Development .....	368
Appendix B – Custom Analysis Template .....	380
Appendix C – Documentation Summary Worksheet for Custom Projects.....	389
Appendix D – TRM Maintenance and Update Process.....	391

## I. Introduction

VEIC was retained by the Public Utilities Commission of Ohio (PUCO) to prepare this Technical Reference Manual (TRM) for use by the electric and gas utilities in the state of Ohio (in response to the PUCO TRM Entry *In the Matter of Protocols for the Measurement and Verification of Energy Efficiency and Peak Demand Reduction Measures, Case No. 09-512-GE-UNC*, June 24, 2009). The information contained in this document outlines our recommendations for the content of the 2010 Ohio TRM and a process for its maintenance and update.

In developing these characterizations, we have reviewed the information in the TRM document filed jointly by the Ohio electric utilities (*Technical Reference Manual (TRM) for Ohio Senate Bill 221, Energy Efficiency and Conservation Program and 09-512-GE-UNC*, October 15, 2009). This review included an engineering assessment of formulas found therein and an analysis of how the utilities' proposals compare with those used in other jurisdictions (after adjusting for expected differences due to climate, codes, programs, etc.). Documents and reference materials supporting utility assumptions have been investigated, and we have been in contact with the utilities to collect information on program design and delivery as well as technical support information and evaluations. We specifically reviewed information from the electric and gas utilities' Portfolio Plans, including savings by measure for the programs the electric utilities have proposed in their plans, and preliminary information on the make-up of mercantile customer projects. We have pursued all significant questions arising out of our review, and findings and observations from these reviews have been shared with the PUCO staff and the utilities.

We have attempted to provide characterizations or protocols here to guide savings calculations for all planned program measures for which there is reliable information to support claims. Measures have been characterized using all available best practice information, taking into account:

- Guidance promulgated by the Commission regarding underlying policy considerations that will shape the protocols, assumptions, and values included in the TRM
- Comparative research of best practice and appropriate use of assumptions from other jurisdictions when needed
- Adjustments made to measure characterizations to reflect the Ohio-specific market environment (climate, codes, other baselines, market penetration, etc.)
- The context of the energy efficiency program designs through which measures are delivered
- Compliance with potential RTO market requirements, including IPMVP protocols where practical and necessary

The characterizations and protocols for the measures included here are the result of these activities. Our analysis of assumptions for these characterizations rests on our understanding of the best-supported information available. In each case, we reviewed all Ohio and mid-West specific information available, including evaluations and support material provided by the Ohio utilities and information from other more-mature efficiency programs in the Ohio region that have undertaken evaluations and research to support their savings assumptions (including programs in Wisconsin, Pennsylvania, and Michigan). Ohio-specific information on market penetrations, weather-dependent assumptions, and local codes and practices was used. When Ohio-specific evaluations of other types of information was not available, or if we felt that results were not well supported or not applicable to the measures in question, we turned to best practice research and data from other jurisdictions, often from west- and east-coast states that have long-standing programs and who have allocated large amounts of funding to evaluation work and refinement of measure characterization parameters. As a result, much of the most-defensible information originates from these regions. In every case we used the most-recent well-designed and supported studies and only if it was appropriate to generalize their conclusions to the Ohio utilities' programs.

## Purpose of the TRM

The TRM has been developed officially to help determine compliance with the energy efficiency and conservation requirements of Senate Bill 221 (SB 221) and the requirements of Case 09-512-GE-UNC. More broadly than this, as envisioned by the PUCO the TRM will serve a wide range of important users and functions, including:

- Utilities – for cost-effectiveness screening and program planning, tracking, and reporting
- Mercantile customers – for assessing energy savings opportunities
- The PUCO, the Independent Program Evaluator, and other parties – for evaluating utilities performance relative to statutory goals, and facilitating planning and portfolio review
- Markets, such as PJM's Reliability Pricing Model (its wholesale capacity market) and carbon markets – for valuing efficiency resources

Thus, the TRM is intended to serve as an important tool to support efficiency investments, both for planning and assessment of success in meeting goals. In addition, the TRM is intended to support the bidding of efficiency resources into resource markets, such as PJM's wholesale capacity market, and in setting and tracking future environmental and climate change goals. It provides a common platform for Ohio utilities to characterize measures within their efficiency programs, analyze and meaningfully compare cost-effectiveness of measures and programs, communicate with policymakers and stakeholders about program details, and it can guide future evaluation and measurement activity and help identify priorities for investment in further study, needed either at a regional or individual organizational level.

## Use of the TRM – General Format

For each prescriptive measure, the TRM includes either specific deemed values or algorithms for deemed calculations. These algorithms contain a number of deemed underlying assumptions that when combined with some measure-specific information (e.g., equipment capacity) produce deemed calculated savings values. Values or algorithms are included for calculating:

- Gross annual electric energy savings
- Gross electric peak demand savings – peak coincidence determinations are based on the PUCO established summer on-peak period (3:00-6:00 p.m. weekdays, June through August)
- Gross annual fossil fuel energy savings - for electric efficiency measures that also save fossil fuels, as well as gas measures
- Other resource savings where appropriate (e.g., water savings, O&M impacts); for use in cost-effectiveness screening
- Incremental costs
- Measure lives

For those measures that appear to be consistent with an implementation strategy involving in-store coupons, prescriptive rebates, or buydowns (for example, efficient appliances, pool pumps, etc.), we have provided prescriptive deemed savings values rather than deemed calculation algorithms that require input variables for each purchase. This was not always consistent with the format of measure characterization in the Joint Utility TRM, but we believe this approach will be more convenient for program design and be equally accurate when all the savings are aggregated.

Conversely, for other measures that lend themselves more appropriately to calculations using site- or project-specific data (for example air sealing, shell insulation, duct sealing, etc.), we have assumed that a member of implementation staff or an associated contractor will be onsite to record the necessary information and use it to calculate savings using the algorithms we have provided. These types of measures are often very variable and so providing simple deemed savings values is not appropriate.

We have also provided detailed protocols for the Residential New Construction and Whole House Retrofit programs that provide guidance on the custom approach recommended for these programs. Both require the collection of site-specific information to be used to assess savings on a house-by-house basis. Detailed protocols are also provided for custom commercial and industrial (C&I) projects and for transmission and distribution (T&D) projects.

The TRM is intended to be a living document. There will be measures that are not characterized here; new measures will be added to programs and new program designs will be implemented; new information will be gathered through evaluations or research; and savings for current measures will change as the activity of the programs changes their markets (i.e., savings for CFLs will decrease over time as successful programs result in lamps being installed mostly in lower-use locations). The TRM update and maintenance process described in Appendix D has been designed to allow for frequent review and update of the TRM as needs demand. Data from reliable impact evaluations would be necessary to support savings claims until the measure has been incorporated into the TRM or updated.

## Use of the TRM – Common Definitions and Assumptions

The savings estimates are expected to serve as representative, recommended values, or ways to calculate savings based on program-specific information. All information is presented on a per measure basis. In using the measure-specific information in the TRM, it is helpful to keep the following notes in mind.

- The TRM clearly identifies whether the measure impacts pertain to “retrofit”, “time of sale”,<sup>1</sup> or “early retirement” program designs.
- Additional information about the program design is sometimes included in the measure description, because program design can affect savings and other parameters.
- Savings algorithms are provided for each measure. For a number of measures, prescriptive values for each of the variables in the algorithm are provided along with the output from the algorithm. That output is the deemed savings assumption. For other measures, prescriptive values are provided for only some of the variables in the algorithm, with the term “actual” or “actual installed” provided for the others. In those cases – which one might call “deemed calculations” – users of the TRM are expected to use actual efficiency program data (e.g., capacities or rated efficiencies of central air conditioners) in the formula to compute savings. Note that the TRM often provides example calculations for measures requiring “actual” values. These are for illustrative purposes only.
- All estimates of savings are for annual savings (not lifetime savings).
- Unless otherwise noted, measure life is defined to be the life of an energy consuming measure, including its equipment life and measure persistence.
- Where deemed values for savings are provided, these represent average savings that could be expected from the average measures that might be installed in the region in 2010.
- For measures that are not weather-sensitive, peak savings are estimated whenever possible as the average of savings between 3 pm and 6 pm across all summer weekdays (the PUCO summer on-peak period).
- Wherever possible, savings estimates and other assumptions are based on Ohio or regional data. However, a number of assumptions are based on sources from other regions of the country. While this information is not perfectly transferable, due to differences in definitions of peak periods as well as geography and climate and customer mix, it was used because it was the most transferable and usable source available at the time.
- Users will note that the TRM presents engineering equations for most measures. These were judged to be desirable because they convey information clearly and transparently, and they are widely accepted in the industry. Unlike simulation model results, they also provide flexibility and opportunity for users to substitute locally specific information and to update some or all parameters as they become available on an ad hoc basis. One limitation is that certain interaction effects between end uses, such as

---

<sup>1</sup> In some jurisdictions, this is called “replace on burn-out”. We use the term “time of sale” because not all new equipment purchases take place when an older existing piece of equipment reaches the end of its life.



how reductions in waste heat from many efficiency measures impacts space conditioning, are not universally captured in this version of the TRM. Such interactive factors are included in calculations for lighting measures, and full protocols for their inclusion are given in the custom project protocols.

- Many C&I measures in the Joint Utility TRM were based on building energy simulations. This was typically done for complex, highly interactive measures, such as envelope improvements or chilled water resets. We agree that this is the best approach; it is prohibitively difficult to estimate energy savings from these types of measures with simplified algorithms. We conducted a review of the building prototype assumptions, which are primarily based on California's Database of Energy-Efficient Resources (DEER) prototypes with adjustments based on data published by the U.S. Energy Information Administration's (EIA) Commercial Building Energy Consumption Survey (CBECS) and a review by an engineering consulting company under contract to Duke Energy, and did not have any major concerns. The parameters used for the efficient case were also reviewed, and no issues significant enough to justify additional modeling work were identified. Two major changes were made in the presentation of the modeled measures in this TRM. First, we added the change in natural gas usage due to heating impacts for all relevant measures. Second, we disaggregated savings estimates by building type as well as climate zone. Many modeled measures show savings varying by up to a factor of four from one building type to another, and envelope measures often have significant heating impacts. These changes should increase the accuracy of the savings estimates and provide a more complete portrait of the measure's impacts. Finally, other values, such as incremental measures costs, that do not affect the modeling results were updated based on the latest available data.
- For early replacement measures across all sectors, we have provided two levels of savings:
  - An initial period during which the existing inefficient unit would have continued to be used had it not been replaced (and savings claimed between the existing unit and the efficient replacement),
  - The remainder of the measure life, where we assume that the existing unit would have been replaced with a standard baseline unit (and so savings are claimed between the standard baseline and the efficient replacement).

We assume that accounting for this step-down adjustment in annual savings is possible in the utilities' tracking systems. We have also provided the impact of the deferred replacement payment that would have occurred at the end of the useful life of the existing equipment.

- For this and other net present value calculations, we have assumed a 5% discount factor for all calculations.
- In general, the baselines included in the TRM are intended to represent average conditions in Ohio. Some are based on data from the state, such as household consumption characteristics provided by the Energy Information Administration. Some are extrapolated from other areas, when Ohio data are not available. When weather adjustments were needed in extrapolations, weather conditions in all major Ohio cities were generally used as representative for their regions.
- The TRM anticipates the effects of changes in efficiency standards for some measures, specifically CFLs and motors. Specific reductions in savings have incorporated for CFL measures that relate to the shift in appropriate baseline due to changes in Federal Standards for lighting products. In 2012, Federal legislation (stemming from the Energy Independence and Security Act of 2007) will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase-out of the current style, or "standard", incandescent bulbs. In 2012, standard 100W incandescent bulbs will no longer be manufactured, followed by restrictions on standard 75W bulbs in 2013 and 60W bulbs in 2014. The baseline for the CFL measure in those years will therefore become bulbs (improved, or "efficient", incandescent, or halogen) that meet the new standard but are still less efficient than a CFL. The industry has indicated that new products that meet the federal standards but are less efficient than CFLs will be on the market. Those products can take several different forms we can envision now and perhaps others we do not yet know about; halogens are one of those possibilities and have been chosen to represent a baseline at that time. CFL fixtures will also have savings reduced by approximately 50% after the first year. Other lighting measures will also have baseline shifts that could result in significant impacts to estimated savings. While not reflected in the current proposed characterization, as of July 14, 2012, Federal

standards will require that all linear fluorescents meet strict performance requirements essentially requiring all T12 users to upgrade to high performance T8 lamps and ballasts.

## II. Residential Market Sector

### Residential ENERGY STAR Compact Fluorescent Lamp (CFL) (Time of Sale)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, Lighting End Use)**)

#### Description

A low wattage ENERGY STAR qualified compact fluorescent screw-in bulb (CFL) is purchased through a retail outlet in place of an incandescent screw-in bulb. The incremental cost of the CFL compared to the incandescent light bulb is offset via either rebate coupons or via upstream markdowns. Assumptions are based on a time of sale purchase, not as a retrofit or direct install installation.

This characterization assumes that the CFL is installed in a residential location. Where the implementation strategy does not allow for the installation location to be known and absent verifiable evaluation data to support an appropriate residential v commercial split, it is recommended to use this residential characterization for all purchases to be appropriately conservative in savings assumptions.

#### Definition of Efficient Equipment

In order for this characterization to apply, the high-efficiency equipment must be a standard ENERGY STAR qualified compact fluorescent lamp.

#### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be an incandescent light bulb.

#### Deemed Calculation for this Measure

$$\begin{aligned}\text{Annual kWh Savings} &= (\text{CFL}_{\text{Watts}} * 3.25) * 0.957 \\ \text{Summer Coincident Peak kW Savings} &= (\text{CFL}_{\text{Watts}} * 3.25) * 0.000114 \\ \text{Annual MMBtu Increase} &= (\text{CFL}_{\text{Watts}} * 3.25) * 0.001908\end{aligned}$$

Note: the delta watts multiplier of 3.25 will be adjusted in accordance with table presented below:

CFL Wattage	Delta Watts Multiplier <sup>2</sup>			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	3.25	3.25	3.25	2.05
16-20	3.25	3.25	2.00	2.00
21W+	3.25	2.06	2.06	2.06

Adjustment to annual savings within life of measure:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	63%

<sup>2</sup> Calculated by finding the new delta watts after incandescent bulb wattage reduced (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
16-20	100%	100%	62%	62%
21W+	100%	63%	63%	63%

#### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 9.18 years<sup>3</sup>.

#### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$3<sup>4</sup>.

#### Deemed O&M Cost Adjustments

The calculated net present value of the baseline replacement costs for CFL type and installation year are presented below:

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$4.48	\$4.28	\$4.28	\$4.28
16-20W	\$3.57	\$4.48	\$4.28	\$4.28
15W and less	\$3.81	\$3.57	\$4.48	\$4.28

#### Coincidence Factor

The summer peak coincidence factor for this measure is 0.11<sup>5</sup>.

---

### REFERENCE SECTION

---

#### Calculation of Savings

##### Energy Savings

$$\Delta kWh = ((\Delta Watts) / 1000) * ISR * HOURS * WHFe$$

Where:

$$\Delta Watts = \text{Compact Fluorescent Watts} * 3.25^6$$

<sup>3</sup> Calculated using average rated life of compact fluorescent bulbs of 8000 hours (8000/1011 = 8 years), based on average for Energy Star CFLs ([http://www.energystar.gov/index.cfm?c=cfls.pr\\_crit\\_cfls](http://www.energystar.gov/index.cfm?c=cfls.pr_crit_cfls)), plus assuming 57% of the 20% not installed in the first year replace CFLs (based on 32 out of 56 respondents purchased as spares; Nexus Market Research, RLW Analytics, October 2004; "Impact Evaluation of the Massachusetts, Rhode Island, and Vermont 2003 Residential Lighting Programs", table 6-4). Measure life is therefore calculated as  $8 + (8 * 0.57 * (0.2/0.77)) = 9.18$ . Note, a provision in the Energy Independence and Security Act of 2007 requires that by January 1, 2020, all lamps meet efficiency criteria of at least 45 lumens per watt, in essence making the CFL baseline. Therefore after 2011 the measure life will have to be reduced each year to account for the number of years remaining to 2020.

<sup>4</sup> Based on review of TRM assumptions from Vermont, New York, New Jersey and Connecticut.

<sup>5</sup> Nexus Market Research, RLW Analytics and GDS Associates study; "New England Residential Lighting Markdown Impact Evaluation, January 20, 2009"

<sup>6</sup> Average wattage of compact fluorescent from Duke Energy, June 2010; "Ohio Residential Smart Saver CFL Program" study was 15.47W, and the replacement incandescent bulb was 65.8W (note only data from responses who reported both wattage removed and wattage replaced are used). This is a ratio of 4.25 to 1, and so the delta watts is equal to the compact fluorescent bulb multiplied by 3.25.

Note: The multiplier should be adjusted according to the table below to account for the change in baseline stemming from the Energy Independence and Security Act of 2007 discussed below:

CFL Wattage	Delta Watts Multiplier <sup>7</sup>			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	3.25	3.25	3.25	2.05
16-20	3.25	3.25	2.00	2.00
21W+	3.25	2.06	2.06	2.06

ISR = In Service Rate or percentage of units rebated that get installed.  
= 0.86<sup>8</sup>  
HOURS = Average hours of use per year  
= 1040 (2.85 hrs per day)<sup>9</sup>  
WHFe = Waste Heat Factor for Energy to account for cooling savings from efficient lighting.  
= 1.07<sup>10</sup>

For example, a 20watt CFL bulb installed in 2010:

$$\Delta \text{kWh} = ((20 * 3.25)/1000) * 0.86 * 1040 * 1.07$$

$$= 62.2 \text{ kWh}$$

### Baseline Adjustment

Federal legislation stemming from the Energy Independence and Security Act of 2007 will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase out of standard incandescent bulbs<sup>11</sup>. In 2012 100W incandescents will no longer be manufactured, followed by restrictions on 75W in 2013 and 60W in 2014. The baseline for this measure will therefore become bulbs (improved incandescent or halogen) that meet the new standard.

To account for these new standards, the first year annual savings for this measure must be reduced for 100W equivalent bulbs (21W+ CFLs) in 2012, for 75W equivalent bulbs (16-20W CFLs) in 2013 and for 60 and 40W equivalent bulbs (15W or less CFLs) in 2014. To account for this adjustment the delta watt

<sup>7</sup> Calculated by finding the new delta watts after incandescent bulb wattage reduced (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

<sup>8</sup> Starting with a first year ISR of 0.77 and a lifetime ISR of 0.97 from Nexus Market Research, RLW Analytics and GDS Associates study; "New England Residential Lighting Markdown Impact Evaluation, January 20, 2009", and assuming 43% of the remaining 20% not installed in the first year replace incandescents (24 out of 56 respondents not purchased as spares; Nexus Market Research, RLW Analytics, October 2004; "Impact Evaluation of the Massachusetts, Rhode Island, and Vermont 2003 Residential Lighting Programs", table 6-4). ISR is therefore calculated as 0.77 + (0.43\*0.2) = 0.86.

<sup>9</sup> Based on weighted average daylength adjusted hours from Duke Energy, June 2010; "Ohio Residential Smart Saver CFL Program"

<sup>10</sup> Waste heat factor for energy to account for cooling savings from efficient lighting. The value is estimated at 1.07 (calculated as 1 + (0.64\*(0.35 / 3.1)). Based on cooling loads decreasing by 35% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes), assuming typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm EER = (SEER \* 0.37) + 6.43 (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software"), converted to COP = EER/3.412 = 3.1COP) and assuming 64% of homes have central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey;

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf).

<sup>11</sup> <http://www.gpo.gov/fdsys/pkg/BILLS-110hr6enr/pdf/BILLS-110hr6enr.pdf>

multiplier is adjusted as shown above. In addition, since during the lifetime of a CFL, the baseline incandescent bulb will be replaced multiple times, the annual savings claim must be reduced within the life of the measure. For example, for 100W equivalent bulbs (21W+ CFLs) installed in 2010, the full savings (as calculated above in the Algorithm) should be claimed for the first two years, but a reduced annual savings claimed for the remainder of the measure life.

The appropriate adjustments as a percentage of the base year savings for each CFL range are provided below<sup>12</sup>:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	63%
16-20	100%	100%	62%	62%
21W+	100%	63%	63%	63%

### Summer Coincident Peak Demand Savings

$$\Delta kW = ((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{WHFd} * \text{CF}$$

Where:

WHFd = Waste Heat Factor for Demand to account for cooling savings from efficient lighting  
= 1.21<sup>13</sup>

CF = Summer Peak Coincidence Factor for measure  
= 0.11

For example, a 20watt CFL bulb installed in 2010:

$$\begin{aligned} \Delta kW &= ((20 * 3.25) / 1000) * 0.86 * 1.21 * 0.11 \\ &= 0.0074 \text{ kW} \end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBTU}_{\text{WH}} = (((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{HOURS} * 0.003413 * \text{HF}) / \eta_{\text{Heat}}$$

Where:

$\Delta \text{MMBTU}_{\text{WH}}$  = gross customer annual heating MMBTU fuel increased usage for the measure from the reduction in lighting heat.

0.003413 = conversion from kWh to MMBTU

HF = Heating Factor or percentage of light savings that must be heated

<sup>12</sup> Calculated by finding the percentage reduction in change of delta watts, for example change in 100W bulb:  $(72 - 23.5) / (100 - 23.5) = 63.4\%$

<sup>13</sup> Waste heat factor for demand to account for cooling savings from efficient lighting. The value is estimated at 1.21 (calculated as  $1 + (0.64 / 3.1)$ ). Based on typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software"), converted to  $\text{COP} = \text{EER} / 3.412 = 3.1\text{COP}$ ), and 64% of homes having central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey).

$$\eta_{\text{Heat}} = 0.45^{14}$$

= average heating system efficiency

$$= 0.72^{15}$$

For example, a 20watt CFL bulb installed in 2010:

$$\Delta \text{MMBTU}_{\text{WH}} = (((20 * 3.25) / 1000) * 0.86 * 1040 * 0.003413 * 0.45) / 0.72$$

$$= 0.12 \text{ MMBtu}$$

### Deemed O&M Cost Adjustment Calculation

In order to account for the shift in baseline due to the Federal Legislation discussed above, the levelized baseline replacement cost over the lifetime of the CFL is calculated (see [CFL baseline savings shift.xls](#)). The key assumptions used in this calculation are documented below:

	Standard Incandescent	Efficient Incandescent
Replacement Cost	\$0.50	\$2.00
Component Life (years) (based on lamp life / assumed annual run hours)	1 <sup>16</sup>	3 <sup>17</sup>

The calculated net present value of the baseline replacement costs for CFL type and installation year are presented below:

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$4.48	\$4.28	\$4.28	\$4.28
16-20W	\$3.57	\$4.48	\$4.28	\$4.28
15W and less	\$3.81	\$3.57	\$4.48	\$4.28

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

### Referenced Documents:

On the following page is an embedded Excel worksheet showing the calculation for the levelized annual replacement cost savings. Double click on the worksheet to open the file and review the calculations.

<sup>14</sup> I.e. heating loads increase by 45% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes),

<sup>15</sup> This has been estimated assuming that natural gas central furnace heating is typical for Ohio residences (65% of East North Central census division has a Natural Gas Furnace (based on Energy Information Administration, 2005 Residential Energy Consumption Survey:

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc4spaceheating/pdf/tablehc12.4.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc4spaceheating/pdf/tablehc12.4.pdf))

In 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment). Furnaces tend to last up to 20 years and so units purchased 10 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:

$(0.4 * 0.92) + (0.6 * 0.8) * (1 - 0.15) = 0.72$

<sup>16</sup> Assumes rated life of incandescent bulb of approximately 1000 hours.

<sup>17</sup> VEIC best estimate of future technology.

## Calculation of O&M Impact for Baseline

Measure Life	9	<b>Bulb Assumptions</b>	
Real Discount Rate (RDR)	5.00%	<b>Inc</b>	<b>Halogen</b>
		1	3
		\$0.50	\$2.00

Component 1 Life (years)  
Component 1 Replacement Cost

2010		Year	2010	2011	2012	2013	2014	2015	2016	2017	2018
		NPV									
21W+	Baseline Replacement Costs	\$5.21	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
16-20W	Baseline Replacement Costs	\$4.15	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00
15W and less	Baseline Replacement Costs	\$4.43	\$0.00	\$0.50	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
2011		Year	2011	2012	2013	2014	2015	2016	2017	2018	2019
		NPV									
21W+	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
16-20W	Baseline Replacement Costs	\$5.21	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
15W and less	Baseline Replacement Costs	\$4.15	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00
2012		Year	2012	2013	2014	2015	2016	2017	2018	2019	2020
		NPV									
21W+	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
16-20W	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
15W and less	Baseline Replacement Costs	\$5.21	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00

	NPV of baseline Replacement Costs			
CFL wattage	2010	2011	2012	2013 on
21W+	\$5.21	\$4.97	\$4.97	\$4.97
16-20W	\$4.15	\$5.21	\$4.97	\$4.97
15W and less	\$4.43	\$4.15	\$5.21	\$4.97

Multiply by 0.86 ISR

	NPV of baseline Replacement Costs			
CFL wattage	2010	2011	2012	2013 on
21W+	\$4.48	\$4.28	\$4.28	\$4.28
16-20W	\$3.57	\$4.48	\$4.28	\$4.28
15W and less	\$3.81	\$3.57	\$4.48	\$4.28



## Residential Direct Install - ENERGY STAR Compact Fluorescent Lamp (CFL) (Early Replacement)

**Official Measure Code** (Measure Number: **X-X-X-X (Existing Homes, Lighting End Use)**)

### Description

A low wattage ENERGY STAR qualified compact fluorescent screw-in bulb is installed by an auditor, contractor or member of utility staff, in a residential location in place of an existing incandescent screw-in bulb through a Direct Install program. The characterization assumes protocols are implemented that guide installation of the bulb in to high use locations in the home. The CFL is provided at no cost to the end user.

### Definition of Efficient Equipment

In order for this characterization to apply, the high-efficiency equipment must be an ENERGY STAR qualified compact fluorescent lamp.

### Definition of Baseline Equipment

In order for this characterization to apply, the existing baseline equipment is assumed to be an incandescent light bulb.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{CFL}_{\text{Watts}} * 3.25) * 0.901$$

$$\text{Summer Coincident Peak kW Savings} = (\text{CFL}_{\text{Watts}} * 3.25) * 0.000108$$

$$\text{Annual MMBtu Increase} = (\text{CFL}_{\text{Watts}} * 3.25) * 0.0018$$

Note: the delta watts multiplier of 3.25 will be adjusted in accordance with table presented below:

CFL Wattage	Delta Watts Multiplier <sup>18</sup>			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	3.25	3.25	3.25	2.05
16-20	3.25	3.25	2.00	2.00
21W+	3.25	2.06	2.06	2.06

Adjustment to annual savings within life of measure:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	63%
16-20	100%	100%	62%	62%
21W+	100%	63%	63%	63%

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 8 years<sup>19</sup>.

<sup>18</sup> Calculated by finding the new delta watts after incandescent bulb wattage reduced (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

<sup>19</sup> Calculated using average rated life of compact fluorescent bulbs of 8000 hours (8000/1011 = 8 years), based on average for Energy Star CFLs ([http://www.energystar.gov/index.cfm?c=cfls.pr\\_crit\\_cfls](http://www.energystar.gov/index.cfm?c=cfls.pr_crit_cfls)).

### Deemed Measure Cost

The full cost for this measure should be equal to the actual cost for implementation and installation (i.e. the cost of product and the labor for its installation).

### Deemed O&M Cost Adjustments

The calculated levelized annual replacement cost savings for CFL type and installation year are presented below:

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.12	\$4.03	\$4.03	\$4.03
16-20W	\$3.36	\$3.12	\$4.03	\$4.03
15W and less	\$3.59	\$3.36	\$3.12	\$4.03

### Coincidence Factor

The summer peak coincidence factor for this measure is 0.11<sup>20</sup>.

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

$$\Delta kWh = ((\Delta Watts) / 1000) * ISR * HOURS * WHFe$$

Where:

$$\Delta Watts = \text{Compact Fluorescent Watts} * 3.25^{21}$$

Note: The multiplier should be adjusted according to the table below to account for the change in baseline stemming from the Energy Independence and Security Act of 2007 discussed below:

CFL Wattage	Delta Watts Multiplier <sup>22</sup>			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	3.25	3.25	3.25	2.05
16-20	3.25	3.25	2.00	2.00
21W+	3.25	2.06	2.06	2.06

$$ISR = \text{In Service Rate or percentage of units rebated that get installed.} \\ = 0.81^{23}$$

---

Note, a provision in the Energy Independence and Security Act of 2007 requires that by January 1, 2020, all lamps meet efficiency criteria of at least 45 lumens per watt, in essence making the CFL baseline. Therefore after 2014 the measure life will have to be reduced each year to account for the number of years remaining to 2020.

<sup>20</sup> Nexus Market Research, RLW Analytics and GDS Associates study; "New England Residential Lighting Markdown Impact Evaluation, January 20, 2009"

<sup>21</sup> Average wattage of compact fluorescent from Duke Energy, June 2010; "Ohio Residential Smart Saver CFL Program" study was 15.47W, and the replacement incandescent bulb was 65.8W (note only data from responses who reported both wattage removed and wattage replaced are used). This is a ratio of 4.25 to 1, and so the delta watts is equal to the compact fluorescent bulb multiplied by 3.25.

<sup>22</sup> Calculated by finding the new delta watts after incandescent bulb wattage reduced (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

HOURS	= Average hours of use per year = 1040 (2.85 hrs per day) <sup>24</sup>
WHFe	= Waste Heat Factor for Energy to account for cooling savings from efficient lighting, = 1.07 <sup>25</sup>

For example, a 20watt CFL bulb installed in 2010:

$$\begin{aligned}\Delta \text{kWh} &= ((20 * 3.25) / 1000) * 0.81 * 1040 * 1.07 \\ &= 58.6 \text{ kWh}\end{aligned}$$

### Baseline Adjustment

Federal legislation stemming from the Energy Independence and Security Act of 2007 will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase out of standard incandescent bulbs<sup>26</sup>. In 2012 100W incandescents will no longer be manufactured, followed by restrictions on 75W in 2013 and 60W in 2014. The baseline for this measure will therefore become bulbs (improved incandescent or halogen) that meet the new standard.

To account for these new standards, the first year annual savings for this measure must be reduced for 100W equivalent bulbs (21W+ CFLs) in 2012, for 75W equivalent bulbs (16-20W CFLs) in 2013 and for 60 and 40W equivalent bulbs (15W or less CFLs) in 2014. To account for this adjustment the delta watt multiplier is adjusted as shown above. In addition, since during the lifetime of a CFL, the baseline incandescent bulb will be replaced multiple times, the annual savings claim must be reduced within the life of the measure. For example, for 100W equivalent bulbs (21W+ CFLs) installed in 2010, the full savings (as calculated above in the Algorithm) should be claimed for the first two years, but a reduced annual savings claimed for the remainder of the measure life.

The appropriate adjustments as a percentage of the base year savings for each CFL range are provided below<sup>27</sup>:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	63%
16-20	100%	100%	62%	62%

<sup>23</sup> Megdal & Associates, 2003; “2002/2003 Impact Evaluation of LIPA's Clean Energy Initiative REAP Program”. Note this is not adjusted upwards since those people removing bulbs after being installed in Direct Install program are likely to do so because they dislike them, not to use as replacements.

<sup>24</sup> Based on weighted average daylength adjusted hours from Duke Energy, June 2010; “Ohio Residential Smart Saver CFL Program”

<sup>25</sup> Waste heat factor for energy to account for cooling savings from efficient lighting. The value is estimated at 1.07 (calculated as  $1 + (0.64 * (0.35 / 3.1))$ ). Based on cooling loads decreasing by 35% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes), assuming typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $EER = (SEER * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; “Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software”), converted to  $COP = EER / 3.412 = 3.1COP$ ) and assuming 64% of homes have central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey; [http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf)).

<sup>26</sup> <http://www.gpo.gov/fdsys/pkg/BILLS-110hr6enr/pdf/BILLS-110hr6enr.pdf>

<sup>27</sup> Calculated by finding the percentage reduction in change of delta watts, for example change in 100W bulb:  $(72 - 23.5) / (100 - 23.5) = 63.4\%$

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
21W+	100%	63%	63%	63%

### Summer Coincident Peak Demand Savings

$$\Delta kW = ((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{WHFd} * \text{CF}$$

Where:

WHFd = Waste Heat Factor for Demand to account for cooling savings from efficient lighting  
= 1.21<sup>28</sup>

CF = Summer Peak Coincidence Factor for measure  
= 0.11

For example, a 20watt CFL bulb, installed in 2010:

$$\begin{aligned} \Delta kW &= ((20 * 3.25) / 1000) * 0.81 * 1.21 * 0.11 \\ &= 0.0070 \text{ kW} \end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBTU}_{\text{WH}} = (((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{HOURS} * 0.003413 * \text{HF}) / \eta_{\text{Heat}}$$

Where:

$\Delta \text{MMBTU}_{\text{WH}}$  = gross customer annual heating MMBTU fuel increased usage for the measure from the reduction in lighting heat.

0.003413 = conversion from kWh to MMBTU

HF = Heating Factor or percentage of light savings that must be heated  
= 0.45<sup>29</sup>

$\eta_{\text{Heat}}$  = average heating system efficiency  
= 0.72<sup>30</sup>

For example, a 20watt CFL bulb, installed in 2010:

<sup>28</sup> Waste heat factor for demand to account for cooling savings from efficient lighting. The value is estimated at 1.21 (calculated as  $1 + (0.64 / 3.1)$ ). Based on typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; “Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software”), converted to COP =  $\text{EER} / 3.412 = 3.1 \text{ COP}$ ), and 64% of homes having central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey).

<sup>29</sup> I.e. heating loads increase by 45% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes),

<sup>30</sup> This has been estimated assuming that natural gas central furnace heating is typical for Ohio residences (65% of East North Central census division has a Natural Gas Furnace (based on Energy Information Administration, 2005 Residential Energy Consumption Survey:

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc4spaceheating/pdf/tablehc12.4.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc4spaceheating/pdf/tablehc12.4.pdf))

In 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process). Assuming typical efficiencies for condensing and non condensing furnace and duct losses, the average heating system efficiency is estimated as follows:  
 $(0.4 * 0.92) + (0.6 * 0.8) * (1 - 0.15) = 0.72$

$$\Delta \text{MMBTU}_{\text{WH}} = (((20 * 3.25) / 1000) * 0.81 * 1040 * 0.003413 * 0.45) / 0.72$$

$$= 0.12 \text{ MMBtu}$$

#### Deemed O&M Cost Adjustment Calculation

In order to account for the shift in baseline due to the Federal Legislation discussed above, the levelized baseline replacement cost over the lifetime of the CFL is calculated (see [CFL baseline savings shift.xls](#)). The key assumptions used in this calculation are documented below:

	Standard Incandescent	Efficient Incandescent
Replacement Cost	\$0.50	\$2.00
Component Life (years) (based on lamp life / assumed annual run hours)	1 <sup>31</sup>	3 <sup>32</sup>

The calculated net present value of the baseline replacement costs for CFL type and installation year are presented below:

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.12	\$4.03	\$4.03	\$4.03
16-20W	\$3.36	\$3.12	\$4.03	\$4.03
15W and less	\$3.59	\$3.36	\$3.12	\$4.03

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

#### Referenced Documents:

On the following page is an embedded Excel worksheet showing the calculation for the levelized annual replacement cost savings. Double click on the worksheet to open the file and review the calculations.

<sup>31</sup> Assumes rated life of incandescent bulb of approximately 1000 hours.

<sup>32</sup> VEIC best estimate of future technology.

## Calculation of O&M Impact for Baseline

Measure Life	8	Bulb Assumptions	
Real Discount Rate (RDI)	5.00%	Inc	Halogen
Component 1 Life (years)		1	3
Component 1 Replacement Cost		\$0.50	\$2.00

2010		Year	2010	2011	2012	2013	2014	2015	2016	2017
		NPV								
21W+	Baseline Replacement Costs	\$3.86	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00
16-20W	Baseline Replacement Costs	\$4.15	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
15W and less	Baseline Replacement Costs	\$4.43	\$0.00	\$0.50	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00
2011		Year	2011	2012	2013	2014	2015	2016	2017	2018
		NPV								
21W+	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
16-20W	Baseline Replacement Costs	\$3.86	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00
15W and less	Baseline Replacement Costs	\$4.15	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
2012		Year	2012	2013	2014	2015	2016	2017	2018	2019
		NPV								
21W+	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
16-20W	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
15W and less	Baseline Replacement Costs	\$3.86	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.86	\$4.97	\$4.97	\$4.97
16-20W	\$4.15	\$3.86	\$4.97	\$4.97
15W and less	\$4.43	\$4.15	\$3.86	\$4.97

Multiply by 0.81 ISR

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.12	\$4.03	\$4.03	\$4.03
16-20W	\$3.36	\$3.12	\$4.03	\$4.03
15W and less	\$3.59	\$3.36	\$3.12	\$4.03

## Refrigerator and/or Freezer Retirement (Early Retirement)

**Official Measure Code** (Measure Number: **X-X-X-X (Program name, End Use)**)

### Description

This measure involves the removal of an existing inefficient refrigerator or freezer from service, prior to its natural end of life (early retirement)<sup>33</sup>. The program should target units with an age greater than 10 years, though it is expected that the average age will be greater than 20 years based on other similar program performance. Savings are calculated for the estimated energy consumption during the remaining life of the existing unit.

### Definition of Efficient Equipment

n/a

### Definition of Baseline Equipment

In order for this characterization to apply, the existing inefficient unit must be in working order and be removed from service.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel increased usage (MMBTU) per unit	Average Annual Water savings per unit
Refrigerator	1376	0.22	n/a	n/a
Freezer	1244	0.20	n/a	n/a

### Deemed Measure Life

The remaining useful life of the retired unit is assumed to be 8 Years<sup>34</sup>.

### Deemed Measure Cost

The incremental cost for this measure will be the actual cost associated with the removal and recycling of the retired unit.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

A coincidence factor is not used to calculate peak demand savings for this measure. See discussion below.

---

## REFERENCE SECTION

---

### Calculation of Savings

---

<sup>33</sup> This measure assumes a mix of primary and secondary units will be replaced (and the savings are reduced accordingly). By definition, the refrigerator in a household's kitchen that satisfies the majority of the household's demand for refrigeration is the primary refrigerator. One or more additional refrigerators in the household that satisfy supplemental needs for refrigeration are referred to as secondary refrigerators.

<sup>34</sup> KEMA "Residential refrigerator recycling ninth year retention study", 2004

## Energy Savings

$$\Delta \text{kWh} = \text{UEC}_{\text{retired}} * \text{ISAF}$$

Where:

$$\begin{aligned} \text{UEC}_{\text{retired}} &= \text{Average in situ Unit Energy Consumption of retired unit, adjusted for part use} \\ &\quad \text{Refrigerator} = 1,619 \text{ kWh}^{35} \\ &\quad \text{Freezer} = 1,464 \text{ kWh}^{36} \\ \text{ISAF} &= \text{In Situ Adjustment Factor} \\ &= 0.85^{37} \end{aligned}$$

$$\text{Refrigerator } \Delta \text{kWh} = 1619 * 0.85$$

$$= 1376 \text{ kWh}$$

$$\text{Freezer } \Delta \text{kWh} = 1464 * 0.85$$

$$= 1244 \text{ kWh}$$

## Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (\Delta \text{kWh}/8760) * \text{TAF} * \text{LSAF}$$

Where:

$$\begin{aligned} \text{TAF} &= \text{Temperature Adjustment Factor} \\ &= 1.30^{38} \\ \text{LSAF} &= \text{Load Shape Adjustment Factor} \\ &= 1.074^{39} \end{aligned}$$

$$\text{Refrigerator } \Delta \text{kW} = 1376/8760 * 1.30 * 1.074$$

$$= 0.22 \text{ kW}$$

$$\text{Freezer } \Delta \text{kW} = 1244/8760 * 1.30 * 1.074$$

$$= 0.20 \text{ kW}$$

<sup>35</sup> Based on regression-based savings estimates and incorporating the part-use factors, from Navigant Consulting, "AEP Ohio Energy Efficiency/Demand Response Plan Year 1 (1/1/2009-12/31/2009) Program Year Evaluation Report: Appliance Recycling Program", March 9, 2010.

<sup>36</sup> Ibid.

<sup>37</sup> A recent California study suggests that in situ energy consumption of refrigerators is lower than the DOE test procedure would suggest (The Cadmus Group et al., "Residential Retrofit High Impact Measure Evaluation Report", prepared for the California Public Utilities Commission, February 8, 2010). The magnitude of the difference – estimated as 6% lower for one California utility, 11% lower for a second, and 16% lower for a third – was a function of whether the recycled appliance was a primary or secondary unit, the size of the household and climate (warmer climates show a small difference between DOE test procedure estimated consumption and actual consumption; cooler climates had lower in situ consumption levels). Ideally, such an adjustment for Ohio should be computed using Ohio program participant data. However, such a calculation has not yet been performed for Ohio. In the absence of such a calculation, a 15% downward adjustment, which is near the high end of the range found in California, is assumed to be reasonable for Ohio given its cooler climate (relative to California).

<sup>38</sup> Temperature adjustment factor based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 47). It assumes 64% of Ohio homes have central air conditioning.

<sup>39</sup> Daily load shape adjustment factor also based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 48, using the average Existing Units Summer Profile for hours ending 16 through 18)



**Fossil Fuel Impact Descriptions and Calculation**

n/a

**Water Impact Descriptions and Calculation**

n/a

**Deemed O&M Cost Adjustment Calculation**

n/a

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Residential HVAC Maintenance/Tune Up (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure involves the measurement of refrigerant charge levels and airflow over the central air conditioning or heat pump unit coil, correction of any problems found and post-treatment re-measurement. Measurements must be performed with standard industry tools and the results tracked by the efficiency program.

Savings from this measure are developed using a reputable Wisconsin study. It is recommended that future evaluation be conducted in Ohio to generate a more locally appropriate characterization.

### Definition of Efficient Equipment

n/a

### Definition of Baseline Equipment

This measure assumes that the existing unit being maintained is either a residential central air conditioning unit or an air source heat pump.

### Deemed Calculation for this Measure

Annual kWh Savings (central air conditioning)  $= \text{FLHcool} * \text{BtuH} * (1/\text{SEER}_{\text{CAC}}) * 5 * 10^{-5}$

Annual kWh Savings (air source heat pump)  $= (\text{FLHcool} * \text{BtuH} * (1/\text{SEER}_{\text{ASHP}}) * 5 * 10^{-5}) + (\text{FLHheat} * \text{BtuH} * (1/\text{HSPF}_{\text{ASHP}})) * 5 * 10^{-5}$

Summer Coincident Peak kW Savings  $= \text{BtuH} * (1/\text{EER}) * 1.0 * 10^{-5}$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 5 years<sup>40</sup>.

### Deemed Measure Cost

If the implementation mechanism involves delivering and paying for the tune up service, the actual cost should be used. If however the customer is provided a rebate and the program relies on private contractors performing the work, the measure cost should be assumed to be \$175<sup>41</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>42</sup>.

<sup>40</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>41</sup> Based on personal communication with HVAC efficiency program consultant Buck Taylor or Roltay Inc., 6/21/10, who estimated the cost of tune up at \$125 to \$225, depending on the market and the implementation details.

<sup>42</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta kWh_{\text{Central AC}} = (FLH_{\text{cool}} * BtuH * (1/SEER_{\text{CAC}}))/1000 * MFe$$

$$\Delta kWh_{\text{Air Source Heat Pump}} = ((FLH_{\text{cool}} * BtuH * (1/SEER_{\text{ASHP}}))/1000 * MFe) + (FLH_{\text{heat}} * BtuH * (1/HSPF_{\text{ASHP}}))/1000 * MFe$$

Where:

FLH<sub>cool</sub> = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>43</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

BtuH = Size of equipment in BtuH (note 1 ton = 12,000BtuH)  
= Actual

SEER<sub>CAC</sub> = SEER Efficiency of existing central air conditioning unit receiving maintenance  
= Actual<sup>44</sup>

MFe = Maintenance energy savings factor  
= 0.05<sup>45</sup>

SEER<sub>ASHP</sub> = SEER Efficiency of existing air source heat pump unit receiving maintenance  
= Actual<sup>46</sup>

FLH<sub>heat</sub> = Full load heating hours  
Dependent on location as below:

Location	Run Hours <sup>47</sup>
Akron	1576
Cincinnati	1394
Cleveland	1567
Columbus	1272
Dayton	1438

<sup>43</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."

<sup>44</sup> Use actual SEER rating where it is possible to measure or reasonably estimate. When unknown use SEER 10 (VEIC estimate of existing unit efficiency, based on minimum federal standard between the years of 1992 and 2006)

<sup>45</sup> Energy Center of Wisconsin, May 2008; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."

<sup>46</sup> Use actual SEER rating where it is possible to measure or reasonably estimate. When unknown use SEER 10 (VEIC estimate of existing unit efficiency, based on minimum federal standard between the years of 1992 and 2006)

<sup>47</sup> Heating EFLH extracted from simulations conducted for Duke Energy, OH Joint Utility TRM, October 2009; "Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC"

Location	Run Hours <sup>47</sup>
Mansfield	1391
Toledo	1628

HSPFbase = Heating Season Performance Factor of existing air source heat pump unit receiving maintenance  
= Actual<sup>48</sup>

For example, maintenance of a 3-ton, SEER 10 air conditioning unit in Cincinnati:

$$\Delta \text{kWh}_{\text{CAC}} = (657 * 36000 * (1/10))/1000 * 0.05$$

$$= 118.3 \text{ kWh}$$

For example, maintenance of a 3-ton, SEER 10, HSPF 6.8 air source heat pump unit in Cincinnati:

$$\Delta \text{kWh}_{\text{ASHP}} = ((657 * 36000 * (1/10))/1000 * 0.05) + (1394 * 36000 * (1/6.8))/1000 * 0.05$$

$$= 487.3 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{BtuH} * (1/\text{EER})/1000 * \text{MFd} * \text{CF}$$

Where:

EER = EER Efficiency of existing unit receiving maintenance  
= Calculate using Actual SEER  
=  $(\text{SEER} * 0.9)^{49}$

MFd = Maintenance demand savings factor  
= 0.02<sup>50</sup>

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>51</sup>

For example, maintenance of 3-ton, SEER 10 (equals EER 9.0) unit:

$$\Delta \text{kW} = 36000 * (1/(9.0))/1000 * 0.02 * 0.5$$

$$= 0.04 \text{ kW}$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

Conservatively not included

<sup>48</sup> Use actual HSPF rating where it is possible to measure or reasonably estimate. When unknown use HSPF 6.8 (Minimum Federal Standard between 1992 and 2006).

<sup>49</sup> If SEER is unknown, default EER would be  $(10 * 0.9) = 9.0$ . Calculation based on prior VEIC assessment of industry equipment efficiency ratings.

<sup>50</sup> Based on June 2010 personal conversation with Scott Pigg, author of Energy Center of Wisconsin, May 2008; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research" suggesting the average WI unit system draw of 2.8kW under peak conditions, and average peak savings of 50W.

<sup>51</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Central Air Conditioning (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a new Central Air Conditioning ducted split system meeting ENERGY STAR efficiency standards presented below. This measure could relate to the replacing of an existing unit at the end of its useful life, or the installation of a new system in an existing home (i.e. time of sale).

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a ducted split central air conditioning unit meeting the minimum ENERGY STAR efficiency level standards; 14.5 SEER and 12 EER.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a ducted split central air conditioning unit meeting the Federal Standard efficiency level; 13 SEER and 11 EER.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{Hours} * \text{BtuH} * (1/13 - 1/\text{SEER}_{\text{ee}}))/1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{BtuH} * (1/11 - 1/\text{EER}_{\text{ee}}))/1000 * 0.5$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 18 years<sup>52</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is provided below<sup>53</sup>.

Efficiency Level	Cost per Ton
SEER 14	\$119
SEER 15	\$238
SEER 16	\$357
SEER 17	\$476
SEER 18	\$596
SEER 19	\$715
SEER 20	\$834
SEER 21	\$908

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>54</sup>.

<sup>52</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>53</sup> DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com))

---



---

## REFERENCE SECTION

---



---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = (\text{FLHcool} * \text{BtuH} * (1/\text{SEERbase} - 1/\text{SEERee}))/1000$$

Where:

FLHcool = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>55</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

BtuH = Size of equipment in BtuH (note 1 ton = 12,000BtuH)  
= Actual installed

SEERbase = SEER Efficiency of baseline unit  
= 13<sup>56</sup>

SEERee = SEER Efficiency of ENERGY STAR unit  
= Actual installed

For example, a 3 ton unit with SEER rating of 14.5, in Dayton:

$$\begin{aligned} \Delta \text{kWH} &= (631 * 36000 * (1/13 - 1/14.5)) / 1000 \\ &= 180.8 \text{ kWh} \end{aligned}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (\text{BtuH} * (1/\text{EERbase} - 1/\text{EERee}))/1000 * \text{CF}$$

Where:

EERbase = EER Efficiency of baseline unit  
= 11<sup>57</sup>

EERee = EER Efficiency of ENERGY STAR unit  
= Actual installed

CF = Summer Peak Coincidence Factor for measure

---

<sup>54</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

<sup>55</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."..

<sup>56</sup> Minimum Federal Standard

<sup>57</sup> Minimum Federal Standard

$$= 0.5^{58}$$

For example, a 3 ton unit with EER rating of 12:

$$\begin{aligned}\Delta \text{kW} &= (36000 * (1/11 - 1/12)) / 1000 * 0.5 \\ &= 0.14 \text{ kW}\end{aligned}$$

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>58</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32



## Air Source Heat Pump (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a new Air Source Heat Pump system meeting ENERGY STAR efficiency standards presented below. This measure could relate to the replacing of an existing unit at the end of its useful life, or the installation of a new system in an existing home (i.e. time of sale).

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be an Air Source Heat Pump unit meeting the minimum ENERGY STAR efficiency level standards; 14.5 SEER, 12 EER and 8.2 HSPF.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be an Air Source Heat Pump unit meeting the Federal Standard efficiency level; 13 SEER and 11 EER.

### Deemed Calculation for this Measure

$$\begin{aligned} \text{Annual kWh Savings} &= (\text{FLHcool} * \text{BtuH} * (1/13 - 1/\text{SEER}_{\text{ee}}))/1000 \\ &+ (\text{FLHheat} * \text{BtuH} * (1/7.7 - 1/\text{HSPF}_{\text{ee}}))/1000 \end{aligned}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{BtuH} * (1/11 - 1/\text{EER}_{\text{ee}}))/1000 * 0.5$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 18 years<sup>59</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is provided below<sup>60</sup>.

Efficiency Level	Cost per Ton
SEER 14	\$137
SEER 15	\$274
SEER 16	\$411
SEER 17	\$548
SEER 18	\$685

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>61</sup>.

<sup>59</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>60</sup> DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com))

<sup>61</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

---



---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta kWH = (FLH_{cool} * BtuH * (1/SEER_{base} - 1/SEER_{ee}))/1000 \\ + (FLH_{heat} * BtuH * (1/HSPF_{base} - 1/HSPF_{ee}))/1000$$

Where:

FLH<sub>cool</sub> = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>62</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

BtuH = Size of equipment in BtuH (note 1 ton = 12,000BtuH)

= Actual installed

SEER<sub>base</sub> = SEER Efficiency of baseline unit

= 13<sup>63</sup>

SEER<sub>ee</sub> = SEER Efficiency of ENERGY STAR unit

= Actual installed

FLH<sub>heat</sub> = Full load heating hours

Dependent on location as below:

Location	Run Hours <sup>64</sup>
Akron	1576
Cincinnati	1394
Cleveland	1567
Columbus	1272
Dayton	1438
Mansfield	1391
Toledo	1628

HSPF<sub>base</sub> = Heating Season Performance Factor for baseline unit

= 7.7<sup>65</sup>

---

<sup>62</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."

<sup>63</sup> Minimum Federal Standard; Federal Register, Vol. 66, No. 14, Monday, January 22, 2001/Rules and Regulations, p. 7170-7200.

<sup>64</sup> Heating EFLH extracted from simulations conducted for Duke Energy, OH Joint Utility TRM, October 2009; "Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC"

<sup>65</sup> Minimum Federal Standard; Federal Register, Vol. 66, No. 14, Monday, January 22, 2001/Rules and Regulations, p. 7170-7200.

HSPFee = Heating Season Performance Factor for efficient unit  
 = Actual Installed

For example, a 3 ton unit with SEER rating of 14.5 and HSPF of 8.2 in Dayton:

$$\Delta \text{kWh} = (631 * 36000 * (1/13 - 1/14.5)) / 1000 + (1438 * 36000 * (1/7.7 - 1/8.2)) / 1000$$

$$= 590.7 \text{ kWh}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{BtuH} * (1/\text{EER}_{\text{base}} - 1/\text{EER}_{\text{ee}}) / 1000 * \text{CF}$$

Where:

EERbase = EER Efficiency of baseline unit  
 = 11<sup>66</sup>  
 EERee = EER Efficiency of ENERGY STAR unit  
 = Actual installed  
 CF = Summer Peak Coincidence Factor for measure  
 = 0.5<sup>67</sup>

For example, a 3 ton unit with EER rating of 12:

$$\Delta \text{kW} = (36000 * (1/11 - 1/12)) / 1000 * 0.5$$

$$= 0.14 \text{ kW}$$

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

<sup>66</sup> Minimum Federal Standard

<sup>67</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

## Attic/Roof/Ceiling Insulation (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure characterization is for the installation of new additional insulation in the attic/roof/ceiling of a residential building. The measure assumes that an auditor, contractor or utility staff member is on location, and will measure and record the existing and new insulation depth and type (to calculate R-values), the surface area of insulation added, and the efficiency of the heating system used in the home.

### Definition of Efficient Equipment

The new insulation should meet any qualification criteria required for participation in the program. The new insulation R-value should include the total attic floor / roof assembly and include any existing insulation that is left in situ.

### Definition of Baseline Equipment

The existing insulation R-value should include the total attic floor / roof assembly. An R-value of 5 should be assumed for the roof assembly plus the R-value of any existing insulation<sup>68</sup>.

### Deemed Calculation for this Measure

Air conditioning Savings

$$\text{Annual kWh Savings} = ((1/R_{\text{exist}} - 1/R_{\text{new}}) * CDH * 0.75 * \text{Area}) / 1000 / \eta_{\text{Cool}}$$

$$\text{Summer Coincident Peak kW Savings} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * 0.5$$

Space Heating Savings:

MMBTU Savings (fossil fuel heating)

$$= ((1/R_{\text{exist}} - 1/R_{\text{new}}) * HDD * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}}$$

Annual kWh Savings (electric heating)

$$= (((1/R_{\text{exist}} - 1/R_{\text{new}}) * HDD * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}}) * 293.1$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 25 years<sup>69</sup>.

### Deemed Measure Cost

The actual insulation installation measure cost should be used.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>70</sup>.

<sup>68</sup> The R-5 assumption for roof assembly is based on J.Neymark & Associates and National Renewable Energy Laboratory, June 2009; "BESTEST-EX Interim Test Procedure" p27. The attic floor and roof should be modeled as a system including solar gains and attic ventilation, and R-5 is the standard assumption for the thermal resistance of the whole attic/roof system.

<sup>69</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>70</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

---



---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = ((1/R_{\text{exist}} - 1/R_{\text{new}}) * \text{CDH} * \text{DUA} * \text{Area}) / 1000 / \eta_{\text{Cool}}$$

Where:

- $R_{\text{exist}}$  = existing effective whole-assembly thermal resistance value or R-value<sup>71</sup>  
= actual recorded
- $R_{\text{new}}$  = new total effective whole-assembly thermal resistance value or R-value<sup>72</sup>  
= actual recorded
- $\text{CDH}$  = Cooling Degree Hours<sup>73</sup>.  
Dependent on location:

Location	Cooling Degree Hours (75°F set point)
Akron	3,986
Cincinnati	7,711
Cleveland	5,817
Columbus	4,367
Dayton	5,934
Toledo	4,401
Youngtown	3,689

- $\text{DUA}$  = Discretionary Use Adjustment to account for the fact that people do not always operate their air conditioning system when the outside temperature is greater than 75°F  
= 0.75<sup>74</sup>
- $\text{Area}$  = Square footage of insulated area  
= actual recorded
- $\eta_{\text{Cool}}$  = Efficiency of Air Conditioning equipment  
= actual recorded

For example, insulating 1000 square feet of an attic floor from R-5 to R-30, in a Cincinnati home with AC SEER 10:

$$\begin{aligned} \Delta \text{kWh} &= ((1/R_{\text{exist}} - 1/R_{\text{new}}) * \text{CDH} * \text{DUA} * \text{Area}) / 1000 / \eta_{\text{Cool}} \\ &= ((1/5 - 1/30) * 7711 * 0.75 * 1000) / 1000 / 10 \\ &= 96 \text{ kWh} \end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * \text{CF}$$

Where:

- $\text{FLH}_{\text{cool}}$  = Full load cooling hours

<sup>71</sup> If uninsulated assembly assume R-5.

<sup>72</sup> Include the R-value for the assembly and any existing insulation remaining.

<sup>73</sup> Derived by summing the delta between the average outdoor temperature and the base set point of 75 degrees (above which cooling is assumed to be used) each hour of the year. Hourly temperature data obtained from TMY3 data (<http://rredc.nrel.gov/solar/>)

<sup>74</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31

Dependent on location as below:

Location	Run Hours <sup>75</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>76</sup>

For example, insulating 1000 square feet of an attic floor from R-5 to R-30, in a Cincinnati home with AC SEER 10:

$$\begin{aligned}\Delta kW &= \Delta kWh / FLH_{cool} * CF \\ &= 129 / 657 * 0.5 \\ &= 0.1 \text{ kW}\end{aligned}$$

### Space Heating Savings Calculation

$$\Delta \text{MMBTU} = ((1/R_{\text{exist}} - 1/R_{\text{new}}) * \text{HDD} * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}}$$

Where:

HDD = Heating Degree Days (60° base temperature) for location<sup>77</sup>

Location	Heating Degree Days (60°F base temperature)
Akron	4,848
Cincinnati	3,853
Cleveland	4,626
Columbus	4,100
Dayton	4,430
Toledo	4,482
Youngstown	4,887

$\eta_{\text{Heat}}$  = Average Net Heating System Efficiency (Equipment Efficiency \* Distribution Efficiency)<sup>78</sup>

<sup>75</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; “National Energy Savings Potential From Addressing Residential HVAC Installation Problems”). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research.”

<sup>76</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32

<sup>77</sup> The 10 year average annual heating degree day value, using a balance point for heating equipment use of 60 degrees was calculated for each location based on data obtained from <http://www.engr.udayton.edu/weather/>. The 60 degree balance point is used based on personal communication with Michael Blasnik, consultant to Columbia gas in May 2010, and derived from a billing analysis of approximately 600,000 Columbia Gas residential single family customers in Ohio.

<sup>78</sup> The System Efficiency can be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table

= actual recorded

**Note for homes with electric heat (resistance or heat pump), follow the MMBTU formula above and convert to kWh by multiplying by 293.1. For heat pumps the equipment efficiency used in the above algorithm should be the Coefficient Of Performance or COP (i.e., divide HSPF by 3.412; e.g., HSPF 7.7 is COP of 2.26).**

For example, insulating 1000 square feet of an attic floor from R-5 to R-30, in a Cincinnati home with a gas heating system with efficiency of 70%:

$$\begin{aligned}\Delta \text{MMBTU} &= ((1/R_{\text{exist}} - 1/R_{\text{new}}) * \text{HDD} * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}} \\ &= ((1/5 - 1/30) * 3,853 * 24 * 1,000) / 1,000,000 / 0.7 \\ &= 22 \text{ MMBtu}\end{aligned}$$

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

If there are more than one heating systems, the weighted (by consumption) average efficiency should be used.

If the heating system or distribution is being upgraded within a package of measures together with the insulation upgrade, the new average heating system efficiency should be used.

## ENERGY STAR Torchiere (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

A high efficiency ENERGY STAR fluorescent torchiere is purchased in place of a baseline mix of halogen and incandescent torchieres and installed in a residential setting. Assumptions are based on a time of sale purchase, not as a retrofit or direct install installation.

### Definition of Efficient Equipment

To qualify for this measure the fluorescent torchiere must meet ENERGY STAR efficiency standards.

### Definition of Baseline Equipment

The baseline is based on a mix of halogen and incandescent torchieres.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Residential	128.9	0.015	- 0.257	n/a

### Deemed Lifetime of Efficient Equipment

The lifetime of the measure is assumed to be 8 years<sup>79</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$5.00<sup>80</sup>.

### Deemed O&M Cost Adjustments

The annual O&M Cost Adjustment savings is calculated as \$2.52.

### Coincidence Factor

The summer peak coincidence factor for this measure is 0.11<sup>81</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = ((\Delta \text{Watts}_{\text{Torch}} / 1000) * \text{ISR} * \text{HOURS} * \text{WHFe})$$

Where:

$$\begin{aligned} \Delta \text{Watts}_{\text{Torch}} &= \text{Average delta watts per purchased ENERGY STAR torchiere} \\ &= 115.8^{82} \end{aligned}$$

<sup>79</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<sup>80</sup> DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com)) and consistent with Efficiency Vermont TRM.

<sup>81</sup> Nexus Market Research, RLW Analytics and GDS Associates study; "New England Residential Lighting Markdown Impact Evaluation, January 20, 2009"



ISR	= In Service Rate or percentage of units rebated that get installed. = 0.95 <sup>83</sup>
HOURS	= Average hours of use per year = 1095 (3.0 hrs per day) <sup>84</sup>
WHFe	= Waste Heat Factor for Energy to account for cooling savings from efficient lighting. = 1.07 <sup>85</sup>

$$\Delta kWH = (115.8 / 1000) * 0.95 * 1095 * 1.07$$

$$= 128.9 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta \text{Watts}_{\text{Torch}} / 1000) * \text{ISR} * \text{WHFd} * \text{CF}$$

Where:

WHFd	= Waste Heat Factor for Demand to account for cooling savings from efficient lighting = 1.21 <sup>86</sup>
CF	= Summer Peak Coincidence Factor for measure = 0.11 <sup>87</sup>

$$\Delta kW = (115.8 / 1000) * 0.95 * 1.21 * 0.11$$

$$= 0.015 \text{ kW}$$

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBTU}_{\text{WH}} = ((\Delta \text{Watts}_{\text{Torch}} / 1000) * \text{ISR} * \text{HOURS} * 0.003413 * \text{HF}) / \eta_{\text{Heat}}$$

<sup>82</sup> Nexus Market Research, "Impact Evaluation of the Massachusetts, Rhode Island and Vermont 2003 Residential Lighting Programs", Final Report, October 1, 2004, p. 43 (Table 4-9)

<sup>83</sup> Nexus Market Research, RLW Analytics "Impact Evaluation of the Massachusetts, Rhode Island, and Vermont 2003 Residential Lighting Programs" table 6-3 on p63 indicates that 86% torchieres were installed and a further 9% were to be installed. Table 6-7 on p67 shows that none are purchased as spares so we assume that all are installed in first year. ([http://publicservice.vermont.gov/energy/ee\\_files/efficiency/eval/marivtreportfinal100104.pdf](http://publicservice.vermont.gov/energy/ee_files/efficiency/eval/marivtreportfinal100104.pdf))

<sup>84</sup> Nexus Market Research, "Impact Evaluation of the Massachusetts, Rhode Island and Vermont 2003 Residential Lighting Programs", Final Report, October 1, 2004, p. 104 (Table 9-7)

<sup>85</sup> Waste heat factor for energy to account for cooling savings from efficient lighting. The value is estimated at 1.07 (calculated as  $1 + (0.64 * (0.35 / 3.1))$ ). Based on cooling loads decreasing by 35% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes), assuming typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software"), converted to  $\text{COP} = \text{EER} / 3.412 = 3.1\text{COP}$ ) and assuming 64% of homes have central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey;

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf)).

<sup>86</sup> Waste heat factor for demand to account for cooling savings from efficient lighting. The value is estimated at 1.21 (calculated as  $1 + (0.64 / 3.1)$ ). Based on typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software"), converted to  $\text{COP} = \text{EER} / 3.412 = 3.1\text{COP}$ ), and 64% of homes having central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey).

<sup>87</sup> Nexus Market Research, RLW Analytics and GDS Associates study; "New England Residential Lighting Markdown Impact Evaluation, January 20, 2009"

Where:

$$\begin{aligned}\Delta\text{MMBTU}_{\text{WH}} &= \text{gross customer annual heating MMBTU fuel increased usage for the measure} \\ &\quad \text{from the reduction in lighting heat.} \\ 0.003413 &= \text{conversion from kWh to MMBTU} \\ \text{HF} &= \text{Heating Factor or percentage of light savings that must be heated} \\ &= 0.45^{88} \\ \eta_{\text{Heat}} &= \text{average heating system efficiency} \\ &= 0.72^{89} \\ \Delta\text{MMBTU}_{\text{WH}} &= ((115.8/1000) * 0.95 * 1095 * 0.003413 * 0.45) / 0.72 \\ &= 0.257 \text{ MMBtu}\end{aligned}$$

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

The annual O&M Cost Adjustment savings is calculated as \$2.52, based on the following component costs and lifetimes<sup>90</sup>

Component	Efficient Measure		Baseline Measures	
	Cost	Life (yrs)	Cost	Life (yrs)
Lamp	\$7.50	8.87 years <sup>91</sup>	\$6.00	1.83 years <sup>92</sup>

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>88</sup> I.e. heating loads increase by 45% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes),

<sup>89</sup> This has been estimated assuming that natural gas central furnace heating is typical for Ohio residences (65% of East North Central census division has a Natural Gas Furnace (based on Energy Information Administration, 2005 Residential Energy Consumption Survey:

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc4spaceheating/pdf/tablehc12.4.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc4spaceheating/pdf/tablehc12.4.pdf))

In 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process). Assuming typical efficiencies for condensing and non condensing furnace and duct losses, the average heating system efficiency is estimated as follows:

$(0.4 * 0.92) + (0.6 * 0.8) * (1 - 0.15) = 0.72$

<sup>90</sup> Cost data derived from Efficiency Vermont TRM.

<sup>91</sup> Calculated using assumed average rated life of Energy Star compact fluorescent torchiere bulbs of 9710 hours (9710/1095 = 8.87 years) ([http://downloads.energystar.gov/bi/qplst/fixtures\\_prod\\_list.xls](http://downloads.energystar.gov/bi/qplst/fixtures_prod_list.xls)).

<sup>92</sup> Based on VEIC assumption of baseline bulb (mix of incandescent and halogen) average rated life of 2000 hours.

## Dedicated Pin Based Compact Fluorescent Lamp (CFL) Table Lamp (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Efficient Products, Lighting End Use))

### Description

A dedicated pin based low wattage compact fluorescent (CFL) table lamp is purchased through a retail outlet in place of an equivalent incandescent bulb lamp. The incremental cost of the CFL lamp compared to an incandescent lamp is offset via either rebate coupons or via upstream markdowns. Assumptions are based on a time of sale purchase, not as a retrofit or direct install installation. This characterization assumes that the CFL is installed in a residential location.

### Definition of Efficient Equipment

In order for this characterization to apply, the high-efficiency equipment must be dedicated pin based low wattage compact fluorescent (CFL) table lamp.

### Definition of Baseline Equipment

The baseline equipment is an incandescent table lamp.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Residential	42.5	0.0061	- 0.085	n/a

Adjustment to annual savings within life of measure:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	63%
16-20	100%	100%	62%	62%
21W+	100%	63%	63%	63%

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 8 years<sup>93</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$8<sup>94</sup>.

### Deemed O&M Cost Adjustments

The calculated levelized annual replacement cost savings for CFL type and installation year are presented below:

<sup>93</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>94</sup> Average table lamp measure in DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com)).

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.86	\$4.97	\$4.97	\$4.97
16-20W	\$4.15	\$3.86	\$4.97	\$4.97
15W and less	\$4.43	\$4.15	\$3.86	\$4.97

### Coincidence Factor

The summer peak coincidence factor for this measure is 0.11<sup>95</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = ((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{HOURS} * \text{WHFe}$$

Where:

$\Delta \text{Watts}$	= Difference in wattage between CFL and incandescent bulb = 45.7 <sup>96</sup>
ISR	= In Service Rate or percentage of units rebated that get installed. = 1.0 <sup>97</sup>
HOURS	= Average hours of use per year = 869 <sup>98</sup>
WHFe	= Waste Heat Factor for Energy to account for cooling savings from efficient lighting. = 1.07 <sup>99</sup>

$$\Delta \text{kWh} = (45.7 / 1000) * 1.0 * 869 * 1.07$$

$$= 42.5 \text{ kWh}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = ((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{WHFd} * \text{CF}$$

Where:

<sup>95</sup> Nexus Market Research, RLW Analytics and GDS Associates study; “New England Residential Lighting Markdown Impact Evaluation, January 20, 2009”

<sup>96</sup> Based on RLW Analytics, New England Residential Lighting Markdown Impact Evaluation, January 20, 2009.

<sup>97</sup> VEIC is not aware of any evaluations that evaluate In Service Rates of table lamps, but feel it is appropriate to assume that those people purchasing a table lamp will install and use it.

<sup>98</sup> Nexus Market Research, RLW Analytics and GDS Associates study; “New England Residential Lighting Markdown Impact Evaluation, January 20, 2009”, p50.

<sup>99</sup> Waste heat factor for energy to account for cooling savings from efficient lighting. The value is estimated at 1.07 (calculated as  $1 + (0.64 * (0.35 / 3.1))$ ). Based on cooling loads decreasing by 35% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes), assuming typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; “Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software”), converted to  $\text{COP} = \text{EER} / 3.412 = 3.1 \text{ COP}$ ) and assuming 64% of homes have central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey; [http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf)).

$$\begin{aligned}
 \text{WHFd} &= \text{Waste Heat Factor for Demand to account for cooling savings from efficient lighting} \\
 &= 1.21^{100} \\
 \text{CF} &= \text{Summer Peak Coincidence Factor for measure} \\
 &= 0.11 \\
 \Delta \text{kW} &= (45.7 / 1000) * 1.0 * 1.21 * 0.11 \\
 &= 0.0061 \text{ kW}
 \end{aligned}$$

### Baseline Adjustment

Federal legislation stemming from the Energy Independence and Security Act of 2007 will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase out of standard incandescent bulbs<sup>101</sup>. In 2012 100W incandescents will no longer be manufactured, followed by restrictions on 75W in 2013 and 60W in 2014. The baseline for this measure will therefore become bulbs (improved incandescent or halogen) that meet the new standard.

To account for these new standards, the first year annual savings for this measure must be reduced for 100W equivalent bulbs (21W+ CFLs) in 2012, for 75W equivalent bulbs (16-20W CFLs) in 2013 and for 60 and 40W equivalent bulbs (15W or less CFLs) in 2014. To account for this adjustment the delta watt multiplier is adjusted as shown above. In addition, since during the lifetime of a CFL, the baseline incandescent bulb will be replaced multiple times, the annual savings claim must be reduced within the life of the measure. For example, for 100W equivalent bulbs (21W+ CFLs) installed in 2010, the full savings (as calculated above in the Algorithm) should be claimed for the first two years, but a reduced annual savings claimed for the remainder of the measure life.

The appropriate adjustments as a percentage of the base year savings for each CFL range are provided below<sup>102</sup>:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	63%
16-20	100%	100%	62%	62%
21W+	100%	63%	63%	63%

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBTU}_{\text{WH}} = (((\Delta \text{Watts}) / 1000) * \text{ISR} * \text{HOURS} * 0.003413 * \text{HF}) / \eta_{\text{Heat}}$$

Where:

$$\Delta \text{MMBTU}_{\text{WH}} = \text{gross customer annual heating MMBTU fuel increased usage for the measure from the reduction in lighting heat.}$$

<sup>100</sup> Waste heat factor for demand to account for cooling savings from efficient lighting. The value is estimated at 1.21 (calculated as  $1 + (0.64 / 3.1)$ ). Based on typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software"), converted to COP =  $\text{EER} / 3.412 = 3.1 \text{ COP}$ ), and 64% of homes having central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey).

<sup>101</sup> <http://www.gpo.gov/fdsys/pkg/BILLS-110hr6enr/pdf/BILLS-110hr6enr.pdf>

<sup>102</sup> Calculated by finding the percentage reduction in change of delta watts, for example change in 100W bulb:  $(72 - 23.5) / (100 - 23.5) = 63.4\%$

0.003413 = conversion from kWh to MMBTU  
 HF = Heating Factor or percentage of light savings that must be heated  
 = 0.45<sup>103</sup>  
 ηHeat = average heating system efficiency  
 = 0.72<sup>104</sup>

$$\Delta \text{MMBTU}_{\text{WH}} = ((45.7 / 1000) * 1.0 * 869 * 0.003413 * 0.45) / 0.72$$

$$= 0.085 \text{ MMBtu}$$

### Deemed O&M Cost Adjustment Calculation

In order to account for the shift in baseline due to the Federal Legislation discussed above, the levelized baseline replacement cost over the lifetime of the CFL is calculated (see [CFL Table Lamp baseline savings shift.xls](#)). The key assumptions used in this calculation are documented below:

	Standard Incandescent	Efficient Incandescent
Replacement Cost	\$0.50	\$2.00
Component Life (years) (based on lamp life / assumed annual run hours)	1 <sup>105</sup>	3 <sup>106</sup>

The calculated net present value of the baseline replacement costs for CFL type and installation year are presented below:

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.86	\$4.97	\$4.97	\$4.97
16-20W	\$4.15	\$3.86	\$4.97	\$4.97
15W and less	\$4.43	\$4.15	\$3.86	\$4.97

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

### Referenced Documents:

On the following page is an embedded Excel showing the calculation for the levelized annual replacement cost savings. Double click on the worksheet to open the file and review the calculations.

<sup>103</sup> I.e. heating loads increase by 45% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes),

<sup>104</sup> This has been estimated assuming that natural gas central furnace heating is typical for Ohio residences (65% of East North Central census division has a Natural Gas Furnace (based on Energy Information Administration, 2005 Residential Energy Consumption Survey:

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc4spaceheating/pdf/tablehc12.4.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc4spaceheating/pdf/tablehc12.4.pdf))

In 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process). Assuming typical efficiencies for condensing and non condensing furnace and duct losses, the average heating system efficiency is estimated as follows:

$(0.4 * 0.92) + (0.6 * 0.8) * (1 - 0.15) = 0.72$

<sup>105</sup> Assumes rated life of incandescent bulb of approximately 1000 hours.

<sup>106</sup> VEIC best estimate of future technology.

## Calculation of O&M Impact for Baseline

Measure Life	8	<b>Bulb Assumptions</b>	
Real Discount Rate (RDI)	5.00%		
		<b>Inc</b>	<b>Halogen</b>
Component 1 Life (years)		1	3
Component 1 Replacement Cost		\$0.50	\$2.00

2010		Year	2010	2011	2012	2013	2014	2015	2016	2017
		NPV								
21W+	Baseline Replacement Costs	\$3.86	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00
16-20W	Baseline Replacement Costs	\$4.15	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
15W and less	Baseline Replacement Costs	\$4.43	\$0.00	\$0.50	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00
2011		Year	2011	2012	2013	2014	2015	2016	2017	2018
		NPV								
21W+	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
16-20W	Baseline Replacement Costs	\$3.86	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00
15W and less	Baseline Replacement Costs	\$4.15	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
2012		Year	2012	2013	2014	2015	2016	2017	2018	2019
		NPV								
21W+	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
16-20W	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
15W and less	Baseline Replacement Costs	\$3.86	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00

CFL wattage	NPV of baseline Replacement Costs			
	2010	2011	2012	2013 on
21W+	\$3.86	\$4.97	\$4.97	\$4.97
16-20W	\$4.15	\$3.86	\$4.97	\$4.97
15W and less	\$4.43	\$4.15	\$3.86	\$4.97

## Ceiling Fan with ENERGY STAR Light Fixture (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the installation of an ENERGY STAR ceiling fan that uses a high efficiency motor and contains compact fluorescent bulbs in place of a standard fan with integral incandescent bulbs.

### Definition of Efficient Equipment

The efficient equipment must be an ENERGY STAR certified ceiling fan with integral CFL bulbs.

### Definition of Baseline Equipment

The baseline equipment is assumed to be a standard fan with integral incandescent bulbs.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
2010 -2013	167	0.019	- 0.33	n/a
2014 on	97	0.012	- 0.19	n/a

Adjustment to annual savings within life of measure of 58% at 2014.

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 10 years<sup>107</sup>.

### Deemed Measure Cost

The incremental cost for the ENERGY STAR ceiling fan is \$86<sup>107</sup>.

### Deemed O&M Cost Adjustments

The calculated net present value of the baseline replacement costs minus the CFL replacement cost for each installation year are presented below. Note this is per fan (i.e. 3 bulbs):

NPV of baseline Replacement Costs - CFL Replacement Costs			
2010	2011	2012	2013 on
\$5.82	\$8.85	\$8.17	\$7.45

### Coincidence Factor

The summer peak coincidence factor for this measure is 0.11<sup>108</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

<sup>107</sup> ENERGY STAR Ceiling Fan Savings Calculator  
([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Ceiling\\_Fan\\_Savings\\_Calculator\\_Consumer.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Ceiling_Fan_Savings_Calculator_Consumer.xls))

<sup>108</sup> Nexus Market Research, RLW Analytics and GDS Associates study; "New England Residential Lighting Markdown Impact Evaluation, January 20, 2009"



## Energy Savings

$$\Delta \text{kWh} = ((\%_{\text{low}} * (\text{LowKW}_{\text{base}} - \text{LowKW}_{\text{ee}}) + \%_{\text{med}} * (\text{MedKW}_{\text{base}} - \text{MedKW}_{\text{ee}}) + \%_{\text{high}} * (\text{HighKW}_{\text{base}} - \text{HighKW}_{\text{ee}})) * \text{HOURS}_{\text{fan}}) + ((\text{IncKW} - \text{CFLKW}) * \text{HOURS}_{\text{light}} * \text{WHFe})$$

Where <sup>109</sup>:

$\%_{\text{low}}$	= Percent of time on Low Speed	= 40%
$\%_{\text{med}}$	= Percent of time on Medium Speed	= 40%
$\%_{\text{high}}$	= Percent of time on High Speed	= 20%
$\text{LowWatt}_{\text{base}}$	= Low speed baseline ceiling fan wattage	= 0.0152kW
$\text{LowWatt}_{\text{ee}}$	= Low speed ENERGY STAR ceiling fan wattage	= 0.0117kW
$\text{MedWatt}_{\text{base}}$	= Medium speed baseline ceiling fan wattage	= 0.0348kW
$\text{MedWatt}_{\text{ee}}$	= Medium speed ENERGY STAR ceiling fan wattage	= 0.0314kW
$\text{HighWatt}_{\text{base}}$	= High speed baseline ceiling fan wattage	= 0.0725kW
$\text{HighWatt}_{\text{ee}}$	= High speed ENERGY STAR ceiling fan wattage	= 0.0715kW
$\text{HOURS}_{\text{fan}}$	= Typical fan operating hours (2.8/day <sup>110</sup> , 365 days per year)	= 1022 hours
$\text{IncWatt}$	= Incandescent bulb kW (assumes 3 * 60W bulb)	= 0.180kW
$\text{CFLWatt}$	= CFL bulb kW (assumes 3 * 20W bulb)	= 0.060kW
$\text{HOURS}_{\text{light}}$	= Typical lighting operating hours (3.5/day, 365 days per year)	= 1277.5 hours
$\text{WHFe}$	= Waste Heat Factor for Energy to account for cooling savings from efficient lighting.	= 1.07 <sup>111</sup>

$$\begin{aligned} \Delta \text{kWh} &= ((0.4 * (0.0152 - 0.0117) + 0.4 * (0.0348 - 0.0314) + 0.2 * (0.0725 - 0.0715)) \\ &\quad * 1022) + ((0.18 - 0.06) * 1277.5 * 1.07) \\ &= 167 \text{ kWh} \end{aligned}$$

## Baseline Adjustment

Federal legislation stemming from the Energy Independence and Security Act of 2007 will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase out of standard incandescent bulbs. In 2012 100W incandescents will no longer be manufactured, followed by restrictions on 75W in 2013 and 60W in 2014. The baseline for this measure will therefore become bulbs (improved incandescent or halogen) that meet the new standard.

To account for these new standards, first year annual savings for this measure must be reduced beginning in 2014. This measure assumes 60W baseline bulbs, which in 2014 will become 43W and so the annual savings beginning in 2014 should therefore be:

$$\begin{aligned} \Delta \text{kWh} &= ((0.4 * (0.0152 - 0.0117) + 0.4 * (0.0348 - 0.0314) + 0.2 * (0.0725 - 0.0715)) \\ &\quad * 1022) + ((\mathbf{0.129} - 0.06) * 1277.5 * 1.07) \end{aligned}$$

<sup>109</sup> All data points (unless otherwise noted) come from the ENERGY STAR Ceiling Fan Savings Calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Ceiling\\_Fan\\_Savings\\_Calculator\\_Consumer.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Ceiling_Fan_Savings_Calculator_Consumer.xls))

<sup>110</sup> For East North Central location.

<sup>111</sup> Waste heat factor for energy to account for cooling savings from efficient lighting. The value is estimated at 1.07 (calculated as  $1 + (0.64 * (0.35 / 3.1))$ ). Based on cooling loads decreasing by 35% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes), assuming typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software"), converted to  $\text{COP} = \text{EER} / 3.412 = 3.1\text{COP}$ ) and assuming 64% of homes have central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey; [http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf)).

$$= 97 \text{ kWh}$$

In addition, since during the lifetime of a CFL, the baseline incandescent bulb will be replaced multiple times, the annual savings claim must be reduced within the life of the measure. Therefore, for bulbs installed in 2010, the full savings (167kWh) should be claimed for the first four years, but the reduced annual savings (97kWh) claimed for the remainder of the measure life. The savings adjustment is therefore equal to  $97/167 = 58\%$ .

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (\%_{\text{low}} * (\text{LowKW}_{\text{base}} - \text{LowKW}_{\text{ee}}) + \%_{\text{med}} * (\text{MedKW}_{\text{base}} - \text{MedKW}_{\text{ee}}) + \%_{\text{high}} * (\text{HighKW}_{\text{base}} - \text{HighKW}_{\text{ee}})) + ((\text{IncKW} - \text{CFLKW}) * \text{WHFd}) * \text{CF}$$

Where:

$$\begin{aligned} \text{WHFd} &= \text{Waste Heat Factor for Demand to account for cooling savings from efficient lighting} \\ &= 1.21^{112} \\ \text{CF} &= \text{Summer Peak Coincidence Factor for measure} \\ &= 0.11 \end{aligned}$$

$$\Delta kW = ((0.4 * (0.0152 - 0.0117) + 0.4 * (0.0348 - 0.0314) + 0.2 * (0.0725 - 0.0715)) + ((0.18 - 0.06) * 1.21) * 0.11)$$

$$\Delta kW = 0.019 \text{ kW}$$

After 2014, this will be reduced to:

$$\Delta kW = ((0.4 * (0.0152 - 0.0117) + 0.4 * (0.0348 - 0.0314) + 0.2 * (0.0725 - 0.0715)) + ((\mathbf{0.129} - 0.06) * 1.21) * 0.11)$$

$$\Delta kW = 0.012 \text{ kW}$$

#### Fossil Fuel Impact Descriptions and Calculation

$$\text{MMBTU}_{\text{WH}} = (((\Delta \text{Watts}) / 1000) * \text{HOURS} * 0.003413 * \text{HF}) / \eta_{\text{Heat}}$$

Where:

$$\begin{aligned} \Delta \text{MMBTU}_{\text{WH}} &= \text{gross customer annual heating MMBTU fuel increased usage for the measure from the reduction in lighting heat.} \\ 0.003413 &= \text{conversion from kWh to MMBTU} \\ \text{HF} &= \text{Heating Factor or percentage of light savings that must be heated} \\ &= 0.45^{113} \\ \eta_{\text{Heat}} &= \text{average heating system efficiency} \\ &= 0.72^{114} \end{aligned}$$

<sup>112</sup> Waste heat factor for demand to account for cooling savings from efficient lighting. The value is estimated at 1.21 (calculated as  $1 + (0.64 / 3.1)$ ). Based on typical cooling system operating efficiency of 3.1 COP (starting from standard assumption of SEER 11 central AC unit, converted to 10.5 EER using algorithm  $\text{EER} = (\text{SEER} * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; “Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software”), converted to  $\text{COP} = \text{EER} / 3.412 = 3.1 \text{ COP}$ ), and 64% of homes having central cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey).

<sup>113</sup> I.e. heating loads increase by 45% of the lighting savings (average result from REMRate modeling of several different configurations and OH locations of homes),

<sup>114</sup> This has been estimated assuming that natural gas central furnace heating is typical for Ohio residences (65% of East North Central census division has a Natural Gas Furnace (based on Energy Information Administration, 2005 Residential Energy Consumption Survey:

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc4spaceheating/pdf/tablehc12.4.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc4spaceheating/pdf/tablehc12.4.pdf))

$$\begin{aligned}\text{MMBTU}_{\text{WH}} &= (((120/1000) * 1277.5 * 0.003413 * 0.45) / 0.72 \\ &= 0.33 \text{ MMBtu}\end{aligned}$$

After 2014, this will be reduced to:

$$\begin{aligned}\text{MMBTU}_{\text{WH}} &= (((69/1000) * 1277.5 * 0.003413 * 0.45) / 0.72 \\ &= 0.19 \text{ MMBtu}\end{aligned}$$

## Water Impact Descriptions and Calculation

n/a

## Deemed O&M Cost Adjustment Calculation

In order to account for the shift in baseline due to the Federal Legislation discussed above, the levelized baseline replacement cost over the lifetime of the CFL is calculated (see [CFL Ceiling Fan baseline savings shift.xls](#)). The key assumptions used in this calculation are documented below:

	Standard Incandescent	Efficient Incandescent
Replacement Cost	\$0.50	\$2.00
Component Life (years) (based on lamp life / assumed annual run hours)	1 <sup>115</sup>	3 <sup>116</sup>

The calculated net present value of the baseline replacement costs minus the CFL replacement cost for each installation year are presented below. Note this is per fan (i.e. 3 bulbs):

NPV of baseline Replacement Costs - CFL Replacement Costs			
2010	2011	2012	2013 on
\$5.82	\$8.85	\$8.17	\$7.45

## Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Referenced Documents:

On the following page is an embedded Excel worksheet showing the calculation for the levelized annual replacement cost savings. Double click on the worksheet to open the file and review the calculations.

---

In 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment). Furnaces tend to last up to 20 years and so units purchased 10 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:  $(0.4 * 0.92) + (0.6 * 0.8) * (1 - 0.15) = 0.72$

<sup>115</sup> Assumes rated life of incandescent bulb of approximately 1000 hours.

<sup>116</sup> VEIC best estimate of future technology.

## Calculation of O&M Impact for Baseline

Measure Life	10
Real Discount Rate (RDR)	5.00%

Component 1 Life (years)	Bulb Assumptions		
	Inc	Halogen	CFL
	1	3	8
Component 1 Replacement Cost	\$0.50	\$2.00	\$3.50

2010	Year	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019
	NPV										
60W	Baseline Replacement Costs	\$4.43	\$0.00	\$0.50	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
	CFL Replacement Costs	\$2.49	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$3.50	\$0.00
	Net replacement cost	\$1.94									

2011	Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
	NPV										
60W	Baseline Replacement Costs	\$5.44	\$0.00	\$0.50	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$2.00
	CFL Replacement Costs	\$2.49	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$3.50	\$0.00
	Net replacement cost	\$2.95									

2012	Year	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021
	NPV										
60W	Baseline Replacement Costs	\$5.21	\$0.00	\$0.50	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00
	CFL Replacement Costs	\$2.49	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$3.50	\$0.00
	Net replacement cost	\$2.72									

2013	Year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
	NPV										
60W	Baseline Replacement Costs	\$4.97	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00	\$0.00	\$2.00	\$0.00
	CFL Replacement Costs	\$2.49	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00	\$3.50	\$0.00
	Net replacement cost	\$2.48									

NPV of baseline Replacement Costs - CFL			
Replacement Costs			
2010	2011	2012	2013 on
\$1.94	\$2.95	\$2.72	\$2.48

\* 3 bulbs

NPV of baseline Replacement Costs - CFL			
Replacement Costs			
2010	2011	2012	2013 on
\$5.82	\$8.85	\$8.17	\$7.45

## Efficient Refrigerator – ENERGY STAR and CEE TIER 2 (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the purchase and installation of a new refrigerator meeting either ENERGY STAR or CEE TIER 2 specifications (defined as requiring  $\geq 20\%$  or  $\geq 25\%$  less energy consumption than an equivalent unit meeting federal standard requirements respectively). This is a time of sale measure characterization.

### Definition of Efficient Equipment

The efficient condition is a new refrigerator meeting either the ENERGY STAR or CEE TIER 2 efficiency standards.

### Definition of Baseline Equipment

The baseline condition is a new refrigerator meeting the minimum federal efficiency standard for refrigerator efficiency.

### Deemed Savings for this Measure

Efficiency Level	Refrigerator Configuration	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
ENERGY STAR	Bottom Freezer	119	0.021	n/a	n/a
	Top Freezer	100	0.018		
	Side by Side	142	0.025		
CEE TIER 2	Bottom Freezer	149	0.026	n/a	n/a
	Top Freezer	124	0.022		
	Side by Side	177	0.031		

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 17 Years<sup>117</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$30<sup>118</sup> for an ENERGY STAR unit and \$140<sup>119</sup> for a CEE Tier 2 unit.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

A coincidence factor is not used to calculate peak demand savings for this measure. See discussion below.

<sup>117</sup> Consistent with Efficiency Vermont and New Jersey TRMs

<sup>118</sup> From ENERGY STAR calculator:

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Consumer\\_Residential\\_Refrig\\_Sav\\_Calc.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Consumer_Residential_Refrig_Sav_Calc.xls)

<sup>119</sup> Based on weighted average of units participating in Efficiency Vermont program and retail cost data provided in Department of Energy, "TECHNICAL REPORT: Analysis of Amended Energy Conservation Standards for Residential Refrigerator-Freezers", October 2005;

[http://www1.eere.energy.gov/buildings/appliance\\_standards/pdfs/refrigerator\\_report\\_1.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/pdfs/refrigerator_report_1.pdf)

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{UEC}_{\text{BASE}} - \text{UEC}_{\text{EE}}$$

Where:

$\text{UEC}_{\text{BASE}}$  = Annual Unit Energy Consumption of baseline unit <sup>120</sup>

Bottom Freezer = 596 kWh

Top Freezer = 497 kWh

Side by Side = 706 kWh

$\text{UEC}_{\text{EE}}$  = Annual Unit Energy Consumption of ENERGY STAR unit (20% less)

Bottom Freezer = 477 kWh

Top Freezer = 397 kWh

Side by Side = 564 kWh

Or = Annual energy consumption of CEE Tier 2 unit (25% less)

Bottom Freezer = 447 kWh

Top Freezer = 373 kWh

Side by Side = 529 kWh

$\Delta \text{kWh}_{\text{ENERGY STAR}}$

Bottom Freezer = 596 – 477

= 119 kWh

Top Freezer = 497 – 397

= 100 kWh

Side by Side = 706 – 564

= 142 kWh

$\Delta \text{kWh}_{\text{CEE TIER 2}}$

Bottom Freezer = 596 – 447

= 149 kWh

Top Freezer = 497 – 373

= 124 kWh

Side by Side = 706 – 529

= 177 kWh

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (\Delta \text{kWh}/8760) * \text{TAF} * \text{LSAF}$$

Where:

TAF = Temperature Adjustment Factor  
= 1.30 <sup>121</sup>

LSAF = Load Shape Adjustment Factor  
= 1.18 <sup>122</sup>

---

<sup>120</sup> kWh assumptions for base condition are based on the average federal standard baseline usage for the range of efficient units purchased through the Efficiency Vermont's Residential Refrigerator program during 2009.

<sup>121</sup> Temperature adjustment factor based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 47). It assumes 64% of Ohio homes have central air conditioning.

<sup>122</sup> Daily load shape adjustment factor also based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 48, extrapolated by taking the

$\Delta kW_{\text{ENERGY STAR}}$

Bottom Freezer =  $119/8760 * 1.3 * 1.18$   
= 0.021 kW  
Top Freezer =  $100/8760 * 1.3 * 1.18$   
= 0.018 kW  
Side by Side =  $142/8760 * 1.3 * 1.18$   
= 0.025 kW

$\Delta kW_{\text{CEE TIER 2}}$

Bottom Freezer =  $149/8760 * 1.3 * 1.18$   
= 0.026 kW  
Top Freezer =  $124/8760 * 1.3 * 1.18$   
= 0.022 kW  
Side by Side =  $177/8760 * 1.3 * 1.18$   
= 0.031 kW

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

ratio of existing summer to existing annual profile for hours ending 16 through 18, and multiplying by new annual profile).

## Refrigerator Replacement (Low Income, Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the early removal of an existing inefficient refrigerator from service, prior to its natural end of life, and replacement with a new ENERGY STAR qualifying unit. This measure is suitable for a Low Income or Home Performance program. Savings are calculated for the estimated energy consumption during the remaining life of the existing unit.

### Definition of Efficient Equipment

The efficient condition is a new replacement refrigerator meeting the ENERGY STAR efficiency standard (defined as requiring  $\geq 20\%$  less energy consumption than an equivalent unit meeting federal standard requirements).

### Definition of Baseline Equipment

The baseline condition is the existing inefficient refrigerator for the remaining assumed useful life of the unit, and then for the remainder of the measure life the baseline becomes a new refrigerator meeting the minimum federal efficiency standard.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Remaining life of existing unit (1 <sup>st</sup> 8 years)	976	0.156	n/a	n/a
Remaining measure life (next 9 years)	100	0.018	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 17 Years<sup>123</sup>.

### Deemed Lifetime of Replaced (Existing) Equipment (for early replacement measures only)

The assumed remaining useful life of the existing refrigerator being replaced is 8 Years<sup>124</sup>.

### Deemed Measure Cost

The actual measure cost for removing the existing unit and installing the new should be used.

### Deemed O&M Cost Adjustments

The net present value of the deferred replacement cost (the cost associated with the replacement of the existing unit with a standard unit that would have had to have occurred in 8 years, had the existing unit not been replaced) is calculated as \$490.73<sup>125</sup>.

### Coincidence Factor

A coincidence factor is not used to calculate peak demand savings for this measure. See discussion below.

<sup>123</sup> Consistent with Efficiency Vermont and New Jersey TRMs

<sup>124</sup> KEMA "Residential refrigerator recycling ninth year retention study", 2004

<sup>125</sup> Determined by calculating the Net Present Value (with a 5% discount rate) of the annuity payments from years 9 to 17 of a deferred replacement of a standard efficiency unit costing \$1150 (from ENERGY STAR calculator: [http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Consumer\\_Residential\\_Refrig\\_Sav\\_Calc.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Consumer_Residential_Refrig_Sav_Calc.xls)).



---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh for remaining life of existing unit (1}^{\text{st}} \text{ 8 years)} = \text{UEC}_{\text{existing}} - \text{UEC}_{\text{ES}}$$

$$\Delta \text{kWh for remaining measure life (next 9 years)} = \text{UEC}_{\text{base}} - \text{UEC}_{\text{ES}}$$

Where:

$\text{UEC}_{\text{existing}}$	= Unit Energy Consumption of existing refrigerator = 1,376 kWh <sup>126</sup>
$\text{UEC}_{\text{ES}}$	= Unit Energy Consumption of new Energy Star refrigerator = 400 kWh <sup>127</sup>
$\text{UEC}_{\text{base}}$	= Unit Energy Consumption of new baseline refrigerator = 500 kWh <sup>128</sup>

$$\begin{aligned} \Delta \text{kWh for remaining life of existing unit (1}^{\text{st}} \text{ 8 years)} &= 1376 - 400 \\ &= 976 \text{ kWh} \end{aligned}$$

$$\begin{aligned} \Delta \text{kWh for remaining measure life (next 9 years)} &= 500 - 400 \\ &= 100 \text{ kWh} \end{aligned}$$

To incorporate this baseline shift, multiply annual savings by a Savings Adjustment of 10% after 8 years.

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (\Delta \text{kWh}/8760) * \text{TAF} * \text{LSAF}$$

Where:

TAF	= Temperature Adjustment Factor = 1.30 <sup>129</sup>
LSAF <sub>exist</sub>	= Load Shape Adjustment Factor for existing unit = 1.074 <sup>130</sup>
LSAF <sub>new</sub>	= Load Shape Adjustment Factor for new unit = 1.18 <sup>131</sup>

<sup>126</sup> Based on regression-based savings estimates and incorporating the part-use factors, from Navigant Consulting, "AEP Ohio Energy Efficiency/Demand Response Plan Year 1 (1/1/2009-12/31/2009) Program Year Evaluation Report: Appliance Recycling Program", March 9, 2010, and multiplied by in situ factor of 0.85 as discussed in Refrigerator Retirement measure.

<sup>127</sup> Approximate average consumption of typical ENERGY STAR refrigerator;  
[http://www.energystar.gov/index.cfm?fuseaction=refrig.display\\_products\\_excel](http://www.energystar.gov/index.cfm?fuseaction=refrig.display_products_excel)

<sup>128</sup> Approximate average consumption of typical baseline refrigerator at federal standard efficiency levels;  
[http://www.energystar.gov/index.cfm?fuseaction=refrig.display\\_products\\_excel](http://www.energystar.gov/index.cfm?fuseaction=refrig.display_products_excel)

<sup>129</sup> Temperature adjustment factor based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 47). It assumes 64% of Ohio homes have central air conditioning.

<sup>130</sup> Daily load shape adjustment factor also based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 48, using the average Existing Units Summer Profile for hours ending 16 through 18)

<sup>131</sup> Daily load shape adjustment factor also based on Blasnik, Michael, "Measurement and Verification of Residential Refrigerator Energy Use, Final Report, 2003-2004 Metering Study", July 29, 2004 (p. 48, extrapolated by taking the

$$\Delta kW \text{ for remaining life of existing unit (1}^{st} \text{ 8 years)} = (1376/8760 * 1.3 * 1.074) - (400/8760 * 1.3 * 1.18)$$

$$= 0.149 \text{ kW}$$

$$\Delta kW \text{ for remaining measure life (next 9 years)} = 100/8760 * 1.3 * 1.18$$

$$= 0.018 \text{ kW}$$

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

The net present value of the deferred replacement cost (the cost associated with the replacement of the existing unit with a standard unit that would have had to have occurred in 8 years, had the existing unit not been replaced) is calculated as \$490.73<sup>132</sup>.

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

ratio of existing summer to existing annual profile for hours ending 16 through 18, and multiplying by new annual profile.

<sup>132</sup> Determined by calculating the Net Present Value (with a 5% discount rate) of the annuity payments from years 9 to 17 of a deferred replacement of a standard efficiency unit costing \$1150 (from ENERGY STAR calculator: [http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Consumer\\_Residential\\_Refrig\\_Sav\\_Calc.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Consumer_Residential_Refrig_Sav_Calc.xls)).

## Clothes Washer – ENERGY STAR and CEE TIER 3 (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the purchase (time of sale) and installation of a clothes washer exceeding either the ENERGY STAR or CEE TIER 3 minimum qualifying efficiency standards presented below:

Efficiency Level	Modified Energy Factor (MEF)	Water Factor (WF)
Federal Standard	$\geq 1.26$	No requirement
ENERGY STAR (as of Jan 1, 2011)	$\geq 2.0$	$\leq 6.0$
CEE TIER 3	$\geq 2.20$	$\leq 4.5$

The modified energy factor (MEF) measures energy consumption of the total laundry cycle (washing and drying). It indicates how many cubic feet of laundry can be washed and dried with one kWh of electricity; the higher the number, the greater the efficiency.

The Water Factor is the number of gallons needed for each cubic foot of laundry. A lower number indicates lower consumption and more efficient use of water.

### Definition of Efficient Equipment

The efficient condition is a clothes washer meeting either the ENERGY STAR or CEE TIER 3 efficiency criteria presented above.

### Definition of Baseline Equipment

The baseline condition is a clothes washer at the minimum federal baseline efficiency presented above.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings (gal) per unit
ENERGY STAR	202	0.028	0.447 (NGas), 0.02 (Oil), 0.013 (LP)	6,265
CEE TIER 3	233	0.033	0.516 (NGas), 0.023 (Oil), 0.015 (LP)	7,160

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 11 years<sup>133</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$258<sup>134</sup> for an ENERGY STAR unit and \$372 for a CEE TIER 3 unit<sup>135</sup>.

### Deemed O&M Cost Adjustments

n/a

<sup>133</sup> ENERGY STAR calculator

([http://www.energystar.gov/index.cfm?fuseaction=find\\_a\\_product.showProductGroup&pgw\\_code=CW](http://www.energystar.gov/index.cfm?fuseaction=find_a_product.showProductGroup&pgw_code=CW))

<sup>134</sup> ENERGY STAR calculator (as above)

<sup>135</sup> Based on an Efficiency Vermont market field study of incremental clothes washer cost between non-energy star and Tier 3 units, finding an average incremental cost to Tier 3 of \$371.63.

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.045<sup>136</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

Savings are determined using Modified Energy Factor assumptions, applying the proportion of consumption used for water heating, clothes washer and clothes dryer operation and then to the mix of domestic hot water heating fuels and dryer fuels. Savings from reduced water usage are also factored in.

For the full calculation see [Clothes Washer Work Sheet](#), but the key assumptions and their sources are provided below:

Washer Volume	= 3.23 cubic feet <sup>137</sup>
Baseline MEF	= 1.26
ENERGY STAR MEF	= 2.0
CEE TIER 3 MEF	= 2.2
Number of cycles per year	= 320 <sup>138</sup>

% energy consumption for water heating, CW operation, Dryer operation  
= 26%, 7%, 67% <sup>139</sup>

Water savings per load <sup>140</sup>  
ENERGY STAR = 19.6 gallons  
CEE TIER 3 = 22.4 gallons

Community/Municipal Water and Wastewater pump kWh savings per gallon water saved  
= 0.0039kWh per gallon of water save <sup>141</sup>

Ohio DHW fuel mix<sup>142</sup>:

Fuel	% of Homes
Electric	27%
Natural Gas	63%
Oil	6%
Propane	4%

<sup>136</sup> Calculated from Itron eShapes, which is 8760 hourly data by end use for Upstate New York and adjusted for OH peak definitions.

<sup>137</sup> Average unit size from Efficiency Vermont program.

<sup>138</sup> Weighted average of 2005 Residential Energy Consumption Survey (RECS) for East North Central Census Division:

([http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc10homeapplianceindicators/pdf/tablehc12.10.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc10homeapplianceindicators/pdf/tablehc12.10.pdf))

<sup>139</sup> Based on the Clothes Washer Technical Support Document, Chapter 4, Engineering Analysis, Table 4.1, Page 4-5  
[http://www.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/chapter\\_4\\_engineering.pdf](http://www.eere.energy.gov/buildings/appliance_standards/residential/pdfs/chapter_4_engineering.pdf)

<sup>140</sup> Determined starting from gallons per load assumption from the ENERGY STAR calculator, dividing by water factor (gallons per cubic foot) to get cubic feet assumption and multiplying by each efficient case water factor.

<sup>141</sup> Efficiency Vermont analysis of Community/Municipal Water and Wastewater pump energy consumption showed 0.0024 kWh pump energy consumption per gallon of water supplied, and 0.0015 kWh consumption per gallon for waste water treatment.

<sup>142</sup> 2005 Residential Energy Consumption Survey (RECS) for East North Central Census Division:  
([http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc8waterheating/pdf/tablehc12.8.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc8waterheating/pdf/tablehc12.8.pdf))

Ohio Dryer fuel mix<sup>143</sup>:

Fuel	% of Homes
Electric	66%
Natural Gas	34%

$$\Delta \text{kWh}_{\text{ENERGY STAR}} = 202 \text{ kWh}$$

$$\Delta \text{kWh}_{\text{CEE TIER 3}} = 233 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / \text{Hours} * \text{CF}$$

Where:

Hours = Assumed Run hours of Clothes Washer  
= 320<sup>144</sup>

CF = Summer Peak Coincidence Factor for measure  
= 0.033<sup>145</sup>

$$\begin{aligned} \Delta \text{kW}_{\text{ENERGY STAR}} &= 202 / 320 * 0.045 \\ &= 0.028 \text{ kW} \end{aligned}$$

$$\begin{aligned} \Delta \text{kW}_{\text{CEE TIER 3}} &= 233 / 320 * 0.045 \\ &= 0.033 \text{ kW} \end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

For calculation see [Clothes Washer Work Sheet](#). Savings are based on the mix of domestic hot water heating fuels and Dryer fuels.

ENERGY STAR unit:

MMBtu Savings Natural Gas = 0.447 MMBtu  
MMBtu Savings Oil = 0.02 MMBtu  
MMBtu Savings Propane = 0.013 MMBtu

CEE TIER 3 unit:

MMBtu Savings Natural Gas = 0.516 MMBtu  
MMBtu Savings Oil = 0.023 MMBtu  
MMBtu Savings Propane = 0.015 MMBtu

### Water Impact Descriptions and Calculation

For calculation see [Clothes Washer Work Sheet](#).

<sup>143</sup> 2005 Residential Energy Consumption Survey (RECS) for East North Central Census Division:  
([http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc9homeappliance/pdf/tablehc12.9.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc9homeappliance/pdf/tablehc12.9.pdf))

<sup>144</sup> Based on assumption of 1 hour average per cycle. # cycles based on weighted average of 2005 Residential Energy Consumption Survey (RECS) for East North Central Census Division (see CW Work Sheet).  
[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc10homeapplianceindicators/pdf/tablehc11.10.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc10homeapplianceindicators/pdf/tablehc11.10.pdf)

<sup>145</sup> Calculated from Itron eShapes, which is 8760 hourly data by end use for Upstate New York and adjusted for OH peak definitions.

ENERGY STAR unit:  
Water Savings = 6,265 gallons

CEE TIER 3 unit:  
Water Savings = 7,160 gallons

**Deemed O&M Cost Adjustment Calculation**

n/a

**Reference Tables**

On the following page is the embedded Clothes Washer calculation spreadsheet. Double click on the window to open the Excel worksheet and follow the formulae.

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Clothes Washer Work Sheet - ENERGY STAR and CEE TIER 3

### 1. Calculate kWh savings per year per machine:

kWh Savings per machine = Washer Volume \* (1/BaseMEF - 1/EFMEF) \* # Cycles

ENERGY STAR	303.2
CEE TIER 3	350.1

Where:

Washer Volume  
Base MEF  
ESTAR MEF  
CEE TIER 3 MEF  
# Cycles

Source:

3.23 Average of Efficiency Vermont program

1.26 Federal Standard

2 Energy Star minimum standard (as of Jan 1 2011)

2.2 CEE Tier 3 Standard

320 Weighted average of 2005 Residential Energy Consumption Survey (RECS) for East North Central Census Division

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc10homeapplianceindicators/pdf/tablehc12.10.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc10homeapplianceindicators/pdf/tablehc12.10.pdf)

### 2. Divide savings by end use for washer and dryer operation:

#### Electricity Consumption by End Use for Washer/Dryer Operation

Water Heating  
CW Machine Operation  
Dryer  
Total

	ENERGY STAR			CEE TIER 3		
Electricity Consumption Percent by End Use	Electric	Gas	Oil	Electric	Gas	Oil
26%	78.8	0.34	0.34	91.0	0.39	0.39
7%	21.2	n/a	n/a	24.5	n/a	n/a
67%	203.1	0.69	n/a	234.6	0.80	n/a
100%	303.2			350.1		

Sources:

1. [www.eere.energy.gov/buildings/appliance\\_standards/residential/clwash\\_0900\\_r.html](http://www.eere.energy.gov/buildings/appliance_standards/residential/clwash_0900_r.html)  
2. Chapter 4, Engineering Analysis, Table 4.1, Page 4-5  
[www.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/chapter\\_4\\_engineering.pdf](http://www.eere.energy.gov/buildings/appliance_standards/residential/pdfs/chapter_4_engineering.pdf)

### 3. Calculate Water Pump Savings

	ENERGY STAR	CEE TIER 3
Annual Water Savings/load	19.6	22.4
Annual Gallons saved	6265	7160
Annual CCF	8.4	9.6
Water Pump Savings	24.4	27.9

Gal  
Gal  
CCF  
kWh

Calculated based on ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bps](http://www.energystar.gov/ia/business/bulk_purchasing/bps))  
Calculated  
Calculated  
0.0039kWh savings per gallon saved - based on Efficiency Vermont analysis of community/municipal water :

### 4. Multiply savings by DHW and Dryer Fuel Mix

#### Ohio assumed DHW fuel mix

Electric	27%
Natural Gas	63%
Oil	6%
Propane	4%

#### Ohio assumed Dryer mix

Electric	66%
Natural Gas	34%

	ENERGY STAR	CEE TIER 3
kWh Savings	202.0	233.0
Natural Gas	0.447	0.516
Oil	0.020	0.023
LP	0.013	0.015

("other" fuel category is split proportionately between fuels)

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc8waterheating/pdf/tablehc12.8.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc8waterheating/pdf/tablehc12.8.pdf)

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc9homeappliance/pdf/tablehc12.9.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc9homeappliance/pdf/tablehc12.9.pdf)

DHW Fuel	Million homes	% of homes
Electric	5.1	27%
Natural Gas	11.9	63%
Oil	1.1	6%
Propane	0.7	4%
	18.8	

Dryer Fuel	Million homes	% of homes
Electric	9.9	66%
Natural Gas	5	34%
	14.9	

## Dehumidifier - ENERGY STAR (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

A dehumidifier meeting the minimum qualifying efficiency standard established by ENERGY STAR on 10/1/2006 is purchased and installed in a residential setting in place of a unit that meets the minimum federal standard efficiency.

### Definition of Efficient Equipment

To qualify for this measure, the new dehumidifier must meet the ENERGY STAR standards as of 10/1/2006 as defined below:

Capacity (pints/day)	ENERGY STAR Criteria (L/kWh)
≤25	≥1.20
> 25 to ≤35	≥1.40
> 35 to ≤45	≥1.50
> 45 to ≤ 54	≥1.60
> 54 to ≤ 75	≥1.80
> 75 to ≤ 185	≥2.50

### Definition of Baseline Equipment

The baseline for this measure is defined as a new dehumidifier that meets the Federal Standard efficiency standards as defined below:

Capacity (pints/day)	Federal Standard Criteria (L/kWh)
≤25	≥1.10
> 25 to ≤35	≥1.20
> 35 to ≤45	≥1.20
> 45 to ≤ 54	≥1.23
> 54 to ≤ 75	≥1.55
> 75 to ≤ 185	≥1.90

### Deemed Savings for this Measure

Capacity Range (pints/day)	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
≤25	54	0.012	n/a	n/a
> 25 to ≤35	117	0.027		
> 35 to ≤45	213	0.048		
> 45 to ≤ 54	297	0.068		
> 54 to ≤ 75	185	0.042		
> 75 to ≤ 185	374	0.085		



**Deemed Lifetime of Efficient Equipment**

The assumed lifetime of the measure is 12 years<sup>146</sup>

**Deemed Measure Cost**

The assumed incremental capital cost for this measure is \$45<sup>147</sup>

**Deemed O&M Cost Adjustments**

n/a

**Coincidence Factor**

The coincidence factor is assumed to be 0.37<sup>148</sup>

---



---

**REFERENCE SECTION**


---



---

**Calculation of Savings****Energy Savings**

$$\Delta \text{kWh} = (\text{Av Capacity} * 0.473) / 24 * \text{Hours} / \text{L/kWh}$$

Where:

0.473	= Constant to convert Pints to Liters
Hours	= Run hours per year
	= 1620 <sup>149</sup>
L/kWh	= Liters of water per kWh consumed
	= As provided in tables above

Annual kWh calculation results for each capacity class presented below:

Capacity Range	Pints/day used	Annual kWh		
		ENERGY STAR	Federal Standard	Savings
≤25	22.4	596	650	54
> 25 to ≤35	30	684	802	117
> 35 to ≤45	40	851	1064	213
> 45 to ≤ 54	49.5	988	1285	297
> 54 to ≤ 75	64.5	1144	1329	185
> 75 to ≤ 185	92.8	1185	1559	374

**Summer Coincident Peak Demand Savings**

$$\Delta \text{kW} = \Delta \text{kWh} / \text{Hours} * \text{CF}$$

Where:

CF	= Summer Peak Coincidence Factor for measure
	= 0.37 <sup>150</sup>

<sup>146</sup> ENERGY STAR Dehumidifier Calculator

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerDehumidifier.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerDehumidifier.xls)

<sup>147</sup> Based on available data from the Department of Energy's Life Cycle Cost analysis spreadsheet:

[http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/docs/lcc\\_dehumidifier.xls](http://www1.eere.energy.gov/buildings/appliance_standards/residential/docs/lcc_dehumidifier.xls)

<sup>148</sup> Assume usage is evenly distributed day vs night, weekend vs weekday and is used between April through the end of September (4392 possible hours). 1620 operating hours from ENERGY STAR Dehumidifier Calculator. Coincidence peak during summer peak is therefore 1620/4392 = 36.9%

<sup>149</sup> ENERGY STAR Dehumidifier Calculator

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerDehumidifier.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerDehumidifier.xls)

Summer coincident peak demand calculation results for each capacity class presented below:

Capacity Range	Pints/day used	Annual kW		
		ENERGY STAR	Federal Standard	Savings
≤25	22.4	0.136	0.148	0.012
> 25 to ≤35	30	0.156	0.182	0.027
> 35 to ≤45	40	0.194	0.242	0.048
> 45 to ≤54	49.5	0.225	0.293	0.068
> 54 to ≤75	64.5	0.261	0.303	0.042
> 75 to ≤185	92.8	0.270	0.355	0.085

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>150</sup> Assume usage is evenly distributed day vs night, weekend vs weekday and is used between April through the end of September (4392 possible hours). 1620 operating hours from ENERGY STAR Dehumidifier Calculator. Coincidence peak during summer peak is therefore  $1620/4392 = 36.9\%$

## Room Air Conditioner - ENERGY STAR and CEE Tier 1 (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the purchase and installation of a room air conditioning unit that meets either the ENERGY STAR or CEE TIER 1 minimum qualifying efficiency specifications, in place of a baseline unit meeting minimum Federal Standard efficiency ratings presented below:

Product Class (BtuH)	Federal Standard (EER)	ENERGY STAR (EER)	CEE TIER 1 (EER)
8,000 to 13,999	>= 9.8	>= 10.8	>= 11.3

### Definition of Efficient Equipment

To qualify for this measure the new room air conditioning unit must meet either the ENERGY STAR or CEE TIER 1 efficiency standards presented above.

### Definition of Baseline Equipment

The baseline assumption is a new room air conditioning unit that meets the current minimum federal efficiency standards presented above.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
ENERGY STAR	18.7	0.024	n/a	n/a
CEE TIER 1	26.8	0.035	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 12 years<sup>151</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$40 for an ENERGY STAR unit and \$80 for a CEE TIER 1 unit<sup>152</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.3<sup>153</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

<sup>151</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>152</sup> Based on field study conducted by Efficiency Vermont

<sup>153</sup> Consistent with coincidence factors found in:

RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008

([http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf))

## Energy Savings

$$\Delta \text{kWh} = (\text{Hours} * \text{BtuH} * (1/\text{EERbase} - 1/\text{EERee}))/1000$$

Where:

Hours	= Full Load Hours of room air conditioning unit = 233 <sup>154</sup>
BtuH	= Average size of rebated unit = 8500 <sup>155</sup>
EERbase	= Efficiency of baseline unit = 9.8 <sup>156</sup>
EERee	= Efficiency of ENERGY STAR unit = 10.8 <sup>157</sup>
Or	= Efficiency of CEE Tier 1 unit = 11.3 <sup>158</sup>

$$\begin{aligned}\Delta \text{kWh}_{\text{ENERGY STAR}} &= (233 * 8500 * (1/9.8 - 1/10.8)) / 1000 \\ &= 18.7 \text{ kWh}\end{aligned}$$

$$\begin{aligned}\Delta \text{kWh}_{\text{CEE TIER 1}} &= (233 * 8500 * (1/9.8 - 1/11.3)) / 1000 \\ &= 26.8 \text{ kWh}\end{aligned}$$

## Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{BtuH} * (1/\text{EERbase} - 1/\text{EERee})/1000 * \text{CF}$$

Where:

CF	= Summer Peak Coincidence Factor for measure = 0.3 <sup>159</sup>
----	--

$$\begin{aligned}\Delta \text{kW}_{\text{ENERGY STAR}} &= (8500 * (1/9.8 - 1/10.8)) / 1000 * 0.3 \\ &= 0.024 \text{ kW}\end{aligned}$$

$$\begin{aligned}\Delta \text{kW}_{\text{CEE TIER 1}} &= (8500 * (1/9.8 - 1/11.3)) / 1000 * 0.3 \\ &= 0.035 \text{ kW}\end{aligned}$$

## Fossil Fuel Impact Descriptions and Calculation

n/a

## Water Impact Descriptions and Calculation

n/a

<sup>154</sup> The average ratio of FLH for Room AC (provided in RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008:

[http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf)) to FLH for Central Cooling for the same location (provided by AHRI:

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) is 31%. This factor was applied to the FLH for Central Cooling provided for OH cities and averaged to come up with the assumption for FLH for Room AC.

<sup>155</sup> Based on maximum capacity average from the RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008.

<sup>156</sup> Minimum Federal Standard for capacity range

<sup>157</sup> Minimum qualifying standard for ENERGY STAR.

<sup>158</sup> Minimum qualifying standard for CEE Tier 1.

<sup>159</sup> Consistent with coincidence factors found in:

RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008

([http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf))

**Deemed O&M Cost Adjustment Calculation**

n/a

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Room Air Conditioner Replacement - ENERGY STAR (Low Income, Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the early removal of an existing inefficient Room Air Conditioner unit from service, prior to its natural end of life, and replacement with a new ENERGY STAR qualifying unit. This measure is suitable for a Low Income or a Home Performance program. Savings are calculated between existing unit and efficient unit consumption during the remaining life of the existing unit, and between new baseline unit and efficient unit consumption for the remainder of the measure life.

### Definition of Efficient Equipment

The efficient condition is a new replacement room air conditioning unit meeting the ENERGY STAR efficiency standard (i.e. with an efficiency rating greater than or equal to 10.8EER).

### Definition of Baseline Equipment

The baseline condition is the existing inefficient room air conditioning unit for the remaining assumed useful life of the unit, and then for the remainder of the measure life the baseline becomes a new replacement unit meeting the minimum federal efficiency standard (i.e. with an efficiency rating greater than or equal to 9.8EER).

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Remaining useful life of existing unit (3 years)	73.8	0.095	n/a	n/a
Remaining Measure Life (next 9 years)	18.7	0.024	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 12 Years<sup>160</sup>.

### Deemed Lifetime of Replaced (Existing) Equipment (for early replacement measures only)

The assumed remaining useful life of the existing room air conditioning unit being replaced is 3 years<sup>161</sup>.

### Deemed Measure Cost

The actual measure cost for removing the existing unit and installing the new should be used.

### Deemed O&M Cost Adjustments

The net present value of the deferred replacement cost (the cost associated with the replacement of the existing unit with a standard unit that would have had to have occurred in 3 years, had the existing unit not been

<sup>160</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>161</sup> Based on Connecticut TRM; Connecticut Energy Efficiency Fund; CL&P and UI Program Savings Documentation for 2008 Program Year

replaced) should be calculated as (Actual Cost of ENERGY STAR unit - \$50 (incremental cost of ENERGY STAR unit over baseline unit<sup>162</sup>) \* 69%<sup>163</sup>.

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.3<sup>164</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\begin{aligned} \Delta \text{kWh for remaining life of existing unit (1}^{\text{st}} \text{ 3 years)} \\ = (\text{Hours} * \text{BtuH} * (1/\text{EER}_{\text{exist}} - 1/\text{EER}_{\text{ee}}))/1000 \end{aligned}$$

$$\begin{aligned} \Delta \text{kWh for remaining measure life (next 9 years)} \\ = (\text{Hours} * \text{BtuH} * (1/\text{EER}_{\text{base}} - 1/\text{EER}_{\text{ee}}))/1000 \end{aligned}$$

Where:

Hours	= Full Load Hours of room air conditioning unit = 233 <sup>165</sup>
BtuH	= Average size of rebated unit = 8500 <sup>166</sup>
EER <sub>exist</sub>	= Efficiency of existing unit = 7.7 <sup>167</sup>
EER <sub>base</sub>	= Efficiency of baseline unit = 9.8 <sup>168</sup>
EER <sub>ee</sub>	= Efficiency of ENERGY STAR unit = 10.8 <sup>169</sup>

$$\begin{aligned} \Delta \text{kWh for remaining life of existing unit (1}^{\text{st}} \text{ 3 years)} \\ = (233 * 8500 * (1/7.7 - 1/10.8)) / 1000 \\ = 73.8 \text{ kWh} \end{aligned}$$

$$\begin{aligned} \Delta \text{kWh for remaining measure life (next 9 years)} \\ = (233 * 8500 * (1/9.8 - 1/10.8)) / 1000 \end{aligned}$$

---

<sup>162</sup> From ENERGY STAR calculator (ENERGY STAR - \$220, Baseline - \$170);

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerRoomAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerRoomAC.xls)

<sup>163</sup> 69% is the ratio of the Net Present Value (with a 5% discount rate) of the annuity payments from years 4 to 12 of a deferred replacement of a standard efficiency unit costing \$170, divided by the standard efficiency unit cost (\$170). The calculation is done in this way to allow the use of the known ENERGY STAR replacement cost to calculate an appropriate baseline replacement cost.

<sup>164</sup> Consistent with coincidence factors found in:

RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008

([http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf))

<sup>165</sup> The average ratio of FLH for Room AC (provided in RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008:

[http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf)) to FLH for Central Cooling for the same location (provided by AHRI:

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) is 31%. This factor was applied to the FLH for Central Cooling provided for OH cities and averaged to come up with the assumption for FLH for Room AC.

<sup>166</sup> Based on maximum capacity average from the RLW Report; "Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008."

<sup>167</sup> Based on Nexus Market Research Inc, RLW Analytics, December 2005; "Impact, Process, and Market Study of the Connecticut Appliance Retirement Program: Overall Report."

<sup>168</sup> Minimum Federal Standard for capacity range

<sup>169</sup> Minimum qualifying standard for ENERGY STAR

$$= 18.7 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\begin{aligned} \Delta \text{kW for remaining life of existing unit (1}^{\text{st}} \text{ 3 years)} \\ = (\text{BtuH} * (1/\text{EER}_{\text{exist}} - 1/\text{EER}_{\text{ee}}))/1000 * \text{CF} \end{aligned}$$

$$\begin{aligned} \Delta \text{kW for remaining measure life (next 9 years)} \\ = (\text{BtuH} * (1/\text{EER}_{\text{base}} - 1/\text{EER}_{\text{ee}}))/1000 * \text{CF} \end{aligned}$$

Where:

$$\begin{aligned} \text{CF} &= \text{Summer Peak Coincidence Factor for measure} \\ &= 0.3^{170} \end{aligned}$$

$$\begin{aligned} \Delta \text{kW for remaining life of existing unit (1}^{\text{st}} \text{ 3 years)} \\ = (8500 * (1/7.7 - 1/10.8)) / 1000 * 0.3 \\ = 0.095 \text{ kW} \end{aligned}$$

$$\begin{aligned} \Delta \text{kW for remaining measure life (next 9 years)} \\ = (8500 * (1/9.8 - 1/10.8)) / 1000 * 0.3 \\ = 0.024 \text{ kW} \end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

The net present value of the deferred replacement cost (the cost associated with the replacement of the existing unit with a standard unit that would have had to have occurred in 3 years, had the existing unit not been replaced) should be calculated as (Actual Cost of ENERGY STAR unit - \$50 (incremental cost of ENERGY STAR unit over baseline unit<sup>171</sup>) \* 69%<sup>172</sup>).

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>170</sup> Consistent with coincidence factors found in:

RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008  
([http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf))

<sup>171</sup> From ENERGY STAR calculator (ENERGY STAR - \$220, Baseline - \$170);

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerRoomAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerRoomAC.xls))

<sup>172</sup> 69% is the ratio of the Net Present Value (with a 5% discount rate) of the annuity payments from years 4 to 12 of a deferred replacement of a standard efficiency unit costing \$170, divided by the standard efficiency unit cost (\$170). The calculation is done in this way to allow the use of the known ENERGY STAR replacement cost to calculate an appropriate baseline replacement cost.



## Room Air Conditioner Recycling (Early Retirement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the savings resulting from running a drop off service taking existing inefficient Room Air Conditioner units from service, prior to their natural end of life. This measure assumes that a percentage of these units will be replaced with a baseline standard efficiency unit (note that if it is actually replaced by a new ENERGY STAR qualifying unit, the savings increment between baseline and ENERGY STAR will be recorded in the Efficient Products program).

### Definition of Efficient Equipment

n/a. This measure relates to the retiring of an existing inefficient unit.

### Definition of Baseline Equipment

The baseline condition is the existing inefficient room air conditioning unit.

### Deemed Savings for this Measure

Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
103.6	0.906	n/a	n/a

### Deemed Lifetime of Replaced (Existing) Equipment (for early replacement measures only)

The assumed remaining useful life of the existing room air conditioning unit being retired is 3 Years.

### Deemed Measure Cost

The actual implementation cost for recycling the existing unit plus the cost for the replacement of some of the units of \$129<sup>173</sup>.

### Deemed O&M Cost Adjustments

The net present value of the deferred replacement cost (the cost associated with the replacement of those units that would be replaced, with a standard unit that would have had to have occurred in 3 years, had the existing unit not been replaced) is calculated as \$89.36<sup>174</sup>.

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.3<sup>175</sup>.

<sup>173</sup> This is calculated by multiplying the percentage assumed to be replaced – 76% (from Based on Nexus Market Research Inc, RLW Analytics, December 2005; “Impact, Process, and Market Study of the Connecticut Appliance Retirement Program: Overall Report”) by the assumed cost of a standard efficiency unit of \$170 (ENERGY STAR calculator; [http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerRoomAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerRoomAC.xls)).  $0.76 * 170 = \$129.2$ .

<sup>174</sup> Determined by calculating the Net Present Value (with a 5% discount rate) of the annuity payments from years 4 to 12 of a deferred replacement of a standard efficiency unit costing \$170 multiplied by the 76%, the percentage of units being replaced (i.e.  $0.76 * \$170 = \$129.2$ . Baseline cost from ENERGY STAR calculator; [http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerRoomAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerRoomAC.xls))

<sup>175</sup> Consistent with coincidence factors found in:  
RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008  
([http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf))

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{kWh}_{\text{exist}} - (\% \text{replaced} * \text{kWh}_{\text{newbase}})$$
$$= ((\text{Hours} * \text{BtuH} * (1/\text{EER}_{\text{exist}}))/1000) - (\% \text{replaced} * ((\text{Hours} * \text{BtuH} * (1/\text{EER}_{\text{newbase}}))/1000))$$

Where:

Hours	= Full Load Hours of room air conditioning unit = 233 <sup>176</sup>
BtuH	= Average size of rebated unit = 8500 <sup>177</sup>
EER <sub>exist</sub>	= Efficiency of existing unit = 7.7 <sup>178</sup>
%replaced	= Percentage of units dropped off that are replaced = 76% <sup>179</sup>
EER <sub>base</sub>	= Efficiency of baseline unit = 9.8 <sup>180</sup>

$$\Delta \text{kWh} = ((233 * 8500 * (1/7.7)) / 1000) - (0.76 * ((233 * 8500 * (1/9.8)) / 1000))$$
$$= 103.6 \text{ kWh}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (\text{kW}_{\text{exist}} - (\% \text{replaced} * \text{kW}_{\text{newbase}})) * \text{CF}$$
$$= ((\text{BtuH} * (1/\text{EER}_{\text{exist}}))/1000) - (\% \text{replaced} * ((\text{BtuH} * (1/\text{EER}_{\text{newbase}}))/1000)) * \text{CF}$$

Where:

CF	= Summer Peak Coincidence Factor for measure = 0.3 <sup>181</sup>
----	--

---

<sup>176</sup> The average ratio of FLH for Room AC (provided in RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008:

[http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf)) to FLH for Central Cooling for the same location (provided by AHRI:

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) is 31%. This factor was applied to the FLH for Central Cooling provided for OH cities and averaged to come up with the assumption for FLH for Room AC.

<sup>177</sup> Based on maximum capacity average from the RLW Report; “Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008.”

<sup>178</sup> Based on Nexus Market Research Inc, RLW Analytics, December 2005; “Impact, Process, and Market Study of the Connecticut Appliance Retirement Program: Overall Report.”

<sup>179</sup> Based on Nexus Market Research Inc, RLW Analytics, December 2005; “Impact, Process, and Market Study of the Connecticut Appliance Retirement Program: Overall Report.” Report states that 63% were replaced with ENERGY STAR units and 13% with non-ENERGY STAR. However this formula assumes all are non-ENERGY STAR since the increment of savings between baseline units and ENERGY STAR would be recorded by the Efficient Products program when the new unit is purchased.

<sup>180</sup> Minimum Federal Standard for capacity range

<sup>181</sup> Consistent with coincidence factors found in:

RLW Report: Final Report Coincidence Factor Study Residential Room Air Conditioners, June 23, 2008

([http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117\\_RLW\\_CF%20Res%20RAC.pdf](http://www.puc.nh.gov/Electric/Monitoring%20and%20Evaluation%20Reports/National%20Grid/117_RLW_CF%20Res%20RAC.pdf))

$$\begin{aligned}\Delta kW &= ((8500 * (1/7.7)) / 1000) - (0.76 * ((8500 * (1/9.8)) / 1000) * 0.3 \\ &= 0.906 \text{ kW}\end{aligned}$$

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

The net present value of the deferred replacement cost (the cost associated with the replacement of those units that would be replaced, with a standard unit that would have had to have occurred in 3 years, had the existing unit not been replaced) is calculated as \$89.36<sup>182</sup>.

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>182</sup> Determined by calculating the Net Present Value (with a 5% discount rate) of the annuity payments from years 4 to 12 of a deferred replacement of a standard efficiency unit costing multiplied by the 76%, the percentage of units being replaced (i.e.  $0.76 * \$170 = \$129.2$ . Baseline cost from ENERGY STAR calculator; [http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/CalculatorConsumerRoomAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/CalculatorConsumerRoomAC.xls))

## Smart Strip Power Strip (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to Controlled Power Strips (or Smart Strips) which are multi-plug power strips with the ability to automatically disconnect specific connected loads depending upon the power draw of a control load, also plugged into the strip. Power is disconnected from the switched (controlled) outlets when the control load power draw is reduced below a certain adjustable threshold, thus turning off the appliances plugged into the switched outlets. By disconnecting, the standby load of the controlled devices, the overall load of a centralized group of equipment (i.e. entertainment centers and home office) can be reduced. Uncontrolled outlets are also provided that are not affected by the control device and so are always providing power to any device plugged into it. This measure characterization provides savings for a 5-plug strip and a 7-plug strip.

### Definition of Efficient Equipment

The efficient case is the use of a 5 or 7-plug smart strip.

### Definition of Baseline Equipment

The assumed baseline is a standard power strip that does not control connected loads.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
5- Plug	56.5	0.0063	n/a	n/a
7- Plug	102.8	0.012	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The assumed lifetime of the smart strip is 4 years<sup>183</sup>.

### Deemed Measure Cost

The incremental cost of a smart strip over a standard power strip with surge protection is assumed to be \$16 for a 5-plug and \$26 for a 7-plug<sup>184</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.8<sup>185</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

<sup>183</sup> David Rogers, Power Smart Engineering, October 2008; "Smart Strip electrical savings and usability", p22.

<sup>184</sup> Price survey performed in NYSERDA Measure Characterization for Advanced Power Strips, p4

<sup>185</sup> Efficiency Vermont coincidence factor for smart strip measure –in the absence of empirical evaluation data, this was based on assumptions of the typical run pattern for televisions and computers in homes.

## Energy Savings<sup>186</sup>

$$\Delta kWh_{5-Plug} = 56.5 \text{ kWh}$$

$$\Delta kWh_{7-Plug} = 102.8 \text{ kWh}$$

## Summer Coincident Peak Demand Savings

$$\Delta kW = \Delta kWh / \text{Hours} * CF$$

Where:

Hours = Annual number of hours during which the controlled standby loads are turned off by the Smart Strip.

CF = 7,129<sup>187</sup>  
= Summer Peak Coincidence Factor for measure  
= 0.8<sup>188</sup>

$$\begin{aligned}\Delta kW_{5-Plug} &= 56.5 / 7129 * 0.8 \\ &= 0.0063 \text{ kW}\end{aligned}$$

$$\begin{aligned}\Delta kW_{7-Plug} &= 102.8 / 7129 * 0.8 \\ &= 0.012 \text{ kW}\end{aligned}$$

## Fossil Fuel Impact Descriptions and Calculation

n/a

## Water Impact Descriptions and Calculation

n/a

## Deemed O&M Cost Adjustment Calculation

n/a

## Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

<sup>186</sup> Based on: NYSERDA Measure Characterization for Advanced Power Strips

<sup>187</sup> Average of hours for controlled TV and computer from; NYSERDA Measure Characterization for Advanced Power Strips

<sup>188</sup> Efficiency Vermont coincidence factor for smart strip measure –in the absence of empirical evaluation data, this was based on assumptions of the typical run pattern for televisions and computers in homes.

## Central Air Conditioning (Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the early removal of an existing inefficient Central Air Conditioning unit from service, prior to its natural end of life, and replacement with a new ENERGY STAR qualifying unit. Savings are calculated between existing unit and efficient unit consumption during the remaining life of the existing unit, and between new baseline unit and efficient unit consumption for the remainder of the measure life.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a ducted split central air conditioning unit meeting the minimum ENERGY STAR efficiency level standards; 14.5 SEER and 12 EER.

### Definition of Baseline Equipment

The baseline condition is the existing inefficient central air conditioning unit for the remaining assumed useful life of the unit, and then for the remainder of the measure life the baseline becomes a new replacement unit meeting the minimum federal efficiency standard (i.e. 13 SEER and 11 EER).

### Deemed Calculation for this Measure

$$\begin{aligned} &\text{Annual kWh Savings for remaining life of existing unit (1}^{\text{st}} \text{ 5 years)} \\ &= (\text{FLHcool} * \text{BtuH} * (1/\text{SEER}_{\text{exist}} - 1/\text{SEER}_{\text{ee}}))/1000 \end{aligned}$$

$$\begin{aligned} &\text{Annual kWh Savings for remaining measure life (next 13 years)} \\ &= (\text{FLHcool} * \text{BtuH} * (1/13 - 1/\text{SEER}_{\text{ee}}))/1000 \end{aligned}$$

$$\begin{aligned} &\text{Summer Coincident Peak kW Savings for remaining life of existing unit (1}^{\text{st}} \text{ 5 years)} \\ &= (\text{BtuH} * (1/\text{EER}_{\text{exist}} - 1/\text{EER}_{\text{ee}}))/1000 * 0.5 \end{aligned}$$

$$\begin{aligned} &\text{Summer Coincident Peak kW Savings for remaining measure life (next 13 years)} \\ &= (\text{BtuH} * (1/11 - 1/\text{EER}_{\text{ee}}))/1000 * 0.5 \end{aligned}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 18 years<sup>189</sup>.

#### Deemed Lifetime of Replaced (Existing) Equipment (for early replacement measures only)

The assumed remaining useful life of the existing central air conditioning unit being replaced is 5 years<sup>190</sup>.

### Deemed Measure Cost

The actual measure cost for removing the existing unit and installing the new should be used.

### Deemed O&M Cost Adjustments

The net present value of the deferred replacement cost (the cost associated with the replacement of the existing unit with a standard unit that would have had to have occurred after 5 years, had the existing unit not been replaced) should be calculated as (Actual Cost of ENERGY STAR unit - incremental cost of ENERGY STAR unit over baseline unit from table below<sup>191</sup>) \* 63%<sup>192</sup>.

<sup>189</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>190</sup> VEIC estimate

<sup>191</sup> DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com)).

<sup>192</sup> 63% is the ratio of the Net Present Value (with a 5% discount rate) of the annuity payments from years 6 to 18 of a deferred replacement of a standard efficiency unit costing \$2857, divided by the standard efficiency unit cost (\$2857). The

Efficiency Level	Cost per Ton
SEER 14	\$119
SEER 15	\$238
SEER 16	\$357
SEER 17	\$476
SEER 18	\$596
SEER 19	\$715
SEER 20	\$834
SEER 21	\$908

#### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>193</sup>.

---



---

### REFERENCE SECTION

---



---

#### Calculation of Savings

##### Energy Savings

$$\Delta \text{kWh for remaining life of existing unit (1}^{\text{st}} \text{ 5 years)} \\ = (\text{FLHcool} * \text{BtuH} * (1/\text{SEER}_{\text{exist}} - 1/\text{SEER}_{\text{ee}}))/1000$$

$$\Delta \text{kWh for remaining measure life (next 13 years)} \\ = (\text{FLHcool} * \text{BtuH} * (1/\text{SEER}_{\text{base}} - 1/\text{SEER}_{\text{ee}}))/1000$$

Where:

FLHcool = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>194</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

BtuH = Size of equipment in BtuH (note 1 ton = 12,000BtuH)  
= Actual

calculation is done in this way to allow the use of the known ENERGY STAR replacement cost to calculate an appropriate baseline replacement cost. Standard unit cost from ENERGY STAR calculator;

[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)

<sup>193</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

<sup>194</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."..

SEER <sub>exist</sub>	= SEER Efficiency of existing unit = Actual <sup>195</sup>
SEER <sub>ee</sub>	= SEER Efficiency of ENERGY STAR unit = Actual installed
SEER <sub>base</sub>	= SEER Efficiency of baseline unit = 13 <sup>196</sup>

For example, replacing a 3 ton SEER 10 unit with a new SEER 14.5 unit, in Dayton:

$$\begin{aligned}\Delta \text{kWh for remaining life of existing unit (1}^{\text{st}} \text{ 5 years)} \\ &= (631 * 36000 * (1/10 - 1/14.5)) / 1000 \\ &= 705 \text{ kWh}\end{aligned}$$

$$\begin{aligned}\Delta \text{kWh for remaining measure life (next 13 years)} \\ &= (631 * 36000 * (1/13 - 1/14.5)) / 1000 \\ &= 180.8 \text{ kWh}\end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\begin{aligned}\Delta \text{kW for remaining life of existing unit (1}^{\text{st}} \text{ 5 years)} \\ &= (\text{BtuH} * (1/\text{EER}_{\text{exist}} - 1/\text{EER}_{\text{ee}})) / 1000 * \text{CF}\end{aligned}$$

$$\begin{aligned}\Delta \text{kW for remaining measure life (next 13 years)} \\ &= (\text{BtuH} * (1/\text{EER}_{\text{base}} - 1/\text{EER}_{\text{ee}})) / 1000 * \text{CF}\end{aligned}$$

Where:

EER <sub>exist</sub>	= EER Efficiency of existing unit = Calculate using Actual SEER = (SEER * 0.9) <sup>197</sup>
EER <sub>base</sub>	= EER Efficiency of baseline unit = 11 <sup>198</sup>
EER <sub>ee</sub>	= EER Efficiency of ENERGY STAR unit = Actual installed
CF	= Summer Peak Coincidence Factor for measure = 0.5 <sup>199</sup>

For example, replacing a 3 ton SEER 10 unit (EER 9) with a new SEER 14.5, EER 12 unit, in Dayton:

$$\begin{aligned}\Delta \text{kW for remaining life of existing unit (1}^{\text{st}} \text{ 5 years)} \\ &= (36000 * (1/9 - 1/12)) / 1000 * 0.5 \\ &= 0.5 \text{ kW}\end{aligned}$$

<sup>195</sup> Use actual SEER rating where it is possible to measure or reasonably estimate. When unknown use SEER 10 (VEIC estimate of existing unit efficiency, based on minimum federal standard between the years of 1992 and 2006)

<sup>196</sup> Minimum Federal Standard

<sup>197</sup> If SEER is unknown, default EER would be (10 \* 0.9) = 9.0. Calculation based on prior VEIC assessment of industry equipment efficiency ratings.

<sup>198</sup> Minimum Federal Standard

<sup>199</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32



$$\begin{aligned}
 &\Delta kW \text{ for remaining measure life (next 13 years)} \\
 &= (36000 * (1/11 - 1/12)) / 1000 * 0.5 \\
 &= 0.14 \text{ kW}
 \end{aligned}$$

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Ground Source Heat Pumps (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a new Ground Source Heat Pump system meeting ENERGY STAR efficiency standards presented below. This measure relates to the installation of a new system in an existing home (i.e. time of sale).

#### Tier 1 Requirements (Effective December 1, 2009)

Product Type	EER	COP
<b>Water-to-air</b>		
Closed Loop	14.1	3.3
Open Loop	16.2	3.6
<b>Water-to-Water</b>		
Closed Loop	15.1	3
Open Loop	19.1	3.4
<b>DGX</b>	15	3.5

#### Tier 2 Requirements (Effective January 1, 2011)

Product Type	EER	COP
<b>Water-to-air</b>		
Closed Loop	16.1	3.5
Open Loop	18.2	3.8
<b>Water-to-Water</b>		
Closed Loop	15.1	3
Open Loop	19.1	3.4
<b>DGX</b>	16	3.6

#### Tier 3 Requirements (Effective January 1, 2012)

Product Type	EER	COP
<b>Water-to-air</b>		
Closed Loop	17.1	3.6
Open Loop	21.1	4.1
<b>Water-to-Water</b>		
Closed Loop	16.1	3.1
Open Loop	20.1	3.5
<b>DGX</b>	16	3.6

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment must be a Ground Source Heat Pump unit meeting the minimum ENERGY STAR efficiency level standards effective at the time of installation as detailed above.

### Definition of Baseline Equipment

The baseline equipment is assumed to be an Air Source Heat Pump meeting the Federal Standard efficiency level; 13 SEER and 11 EER.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{FLHcool} * \text{BtuH} * (1/13 - (1/(\text{EERee} * 1.02)))/ + (\text{FLHheat} * \text{BtuH} * (1/7.7 - (1/\text{CO Pee} * 3.412))/1000$$

$$\text{Summer Coincident Peak kW Savings} = \text{BtuH} * (1/11 - 1/(((\text{EERee} * 1.02) * 0.37) + 6.43))/1000 * 0.5$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 18 years<sup>200</sup>.

### Deemed Measure Cost

The actual installed cost of the Ground Source Heat Pump should be used, minus the assumed installation cost of a 3 ton standard baseline Air Source Heat Pump of \$3,609<sup>201</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>202</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = (\text{FLHcool} * \text{BtuH} * (1/\text{SEERbase} - (1/(\text{EERee} * 1.02)))/1000 + (\text{FLHheat} * \text{BtuH} * (1/\text{HSPFbase} - (1/\text{CO Pee} * 3.412))/1000$$

Where:

FLHcool = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>203</sup>
Akron	476

<sup>200</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>201</sup> Based on DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com)). Material cost of 13 SEER AC is \$796 per ton, and labor cost of \$407 per ton. For a 3 ton unit this would be (796+407) \*3 = \$3609.

<sup>202</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

<sup>203</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Wisconsin study.

Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

BtuH = Size of equipment in BtuH (note 1 ton = 12,000BtuH)  
= Actual installed  
SEERbase = SEER Efficiency of baseline unit  
= 13<sup>204</sup>  
EERee = EER Efficiency of efficient unit  
= Actual installed  
1.02 = Constant used to estimate the SEER based on the efficient unit's EER<sup>205</sup>.  
FLHheat = Full load heating hours

Dependent on location as below:

Location	Run Hours <sup>206</sup>
Akron	1576
Cincinnati	1394
Cleveland	1567
Columbus	1272
Dayton	1438
Mansfield	1391
Toledo	1628

HSPFbase = Heating Season Performance Factor for baseline unit  
= 7.7<sup>207</sup>  
COpee = Coefficient of Performance of efficient unit  
= Actual Installed  
3.413 = Constant to convert the COP of the unit to the Heating Season Performance Factor (HSPF).

For example, a 3 ton unit with EER rating of 16 and COP of 3.5 in Dayton:

$$\Delta \text{kWh} = (\text{FLHcool} * \text{BtuH} * (1/\text{SEERbase} - (1/(\text{EERee} * 1.02))))/1000 \\ + (\text{FLHheat} * \text{BtuH} * (1/\text{HSPFbase} - (1/(\text{COpee} * 3.412))))/1000$$

$$\Delta \text{kWh} = (631 * 36000 * (1/13 - 1/(16*1.02))) / 1000 + (1438 * 36000 * (1/7.7 - 1/(3.5*3.412))) / 1000 \\ = 2744 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{BtuH} * (1/\text{EERbase} - 1/(((\text{EERee} * 1.02) * 0.37) + 6.43))/1000 * \text{CF}$$

<sup>204</sup> Minimum Federal Standard; Federal Register, Vol. 66, No. 14, Monday, January 22, 2001/Rules and Regulations, p. 7170-7200.

<sup>205</sup> Note that EERs of GSHPs are measured differently than EERs of air source heat pumps (focusing on entering water temperatures rather than ambient air temperatures). The equivalent SEER of a GSHP can be estimated by multiplying EER by 1.02, based on VEIC extrapolation of manufacturer data.

<sup>206</sup> Heating EFLH extracted from simulations conducted for Duke Energy, OH Joint Utility TRM, October 2009; "Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC"

<sup>207</sup> Minimum Federal Standard; Federal Register, Vol. 66, No. 14, Monday, January 22, 2001/Rules and Regulations, p. 7170-7200.

Where:

EERbase	= EER Efficiency of baseline unit = 11 <sup>208</sup>
EERee	= EER Efficiency of ENERGY STAR unit = Actual installed
1.02	= Constant used to estimate the unit's equivalent air conditioning SEER based on the GSHP unit's EER <sup>209</sup> . This is then converted to the unit's equivalent air conditioning EER to enable comparisons to the baseline unit using the following algorithm: $EER_{ac} = (SEER * 0.37) + 6.43$ <sup>210</sup>
CF	= Summer Peak Coincidence Factor for measure = 0.5 <sup>211</sup>

For example, a 3 ton unit with EER rating of 16:

$$\begin{aligned}\Delta kW &= (36000 * (1/11 - 1/(((16 * 1.02) * 0.37) + 6.43))) / 1000 * 0.5 \\ &= 0.2 \text{ kW}\end{aligned}$$

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>208</sup> Minimum Federal Standard; as above.

<sup>209</sup> Note that EERs of GSHPs are measured differently than EERs of air source heat pumps (focusing on entering water temperatures rather than ambient air temperatures). The equivalent SEER of a GSHP can be estimated by multiplying EER by 1.02, based on VEIC extrapolation of manufacturer data.

<sup>210</sup> Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software". This formulaic relationship was derived from 1861 unique combinations of data, from nearly 200,000 ARI-rated residential central air conditioners.

<sup>211</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

## Heat Pump Water Heaters (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a Heat Pump domestic hot water heater in place of a standard electric hot water heater in conditioned space. This is a time of sale measure. Savings are presented dependent on the heating system installed in the home.

### Definition of Efficient Equipment

To qualify for this measure the installed equipment must be a Heat Pump domestic hot water heater.

### Definition of Baseline Equipment

The baseline condition is assumed to be a standard electric hot water heater.

### Deemed Savings for this Measure

Heating System:	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Electric Resistance Heat	499	0.068	n/a	n/a
Heat Pump	1297	0.18	n/a	n/a
Fossil Fuel	2076	0.28	-7.38	n/a

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 10 years<sup>212</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$925<sup>213</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer coincidence factor is assumed to be 0.346<sup>214</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = \text{KWH}_{\text{base}} * ((\text{COP}_{\text{new}} - \text{COP}_{\text{base}}) / \text{COP}_{\text{new}}) + \text{KWH}_{\text{cooling}} - \text{KWH}_{\text{heating}}$$

<sup>212</sup>Based on ENERGY STAR Residential Water Heaters, Final Criteria Analysis:

[http://www.energystar.gov/ia/partners/prod\\_development/new\\_specs/downloads/water\\_heaters/WaterHeaterDraftCriteriaAnalysis.pdf](http://www.energystar.gov/ia/partners/prod_development/new_specs/downloads/water_heaters/WaterHeaterDraftCriteriaAnalysis.pdf)

<sup>213</sup> Vermont Energy Investment Corporation "Residential Heat Pump Water Heaters: Energy Efficiency Potential and Industry Status" November 2005

<sup>214</sup> Calculated from Itron eShapes, which is 8760 hourly data by end use for Upstate New York, adjusted for OH peak definitions. Resultant coincident peak kW is consistent with result shown in FEMP study; Field Testing of Pre-Production Prototype Residential Heat Pump Water Heaters

[http://www1.eere.energy.gov/femp/pdfs/tir\\_heatpump.pdf](http://www1.eere.energy.gov/femp/pdfs/tir_heatpump.pdf)

Where:

KWHbase	= Average electric DHW consumption = 3460 <sup>215</sup>
COPnew	= Coefficient of Performance (efficiency) of Heat Pump water heater = 2.0 <sup>216</sup>
COPbase	= Coefficient of Performance (efficiency) of standard electric water heater = 0.904 <sup>217</sup>
KWHcooling	= Cooling savings from conversion of heat in home to water heat = 180 <sup>218</sup>
KWHheating	= Heating cost from conversion of heat in home to water heat.

Dependent on heating fuel as follows<sup>219</sup>:

KWHheating (electric resistance)	= 1,577
KWHheating (heat pump COP 2.0)	= 779
KWHheating (fossil fuel)	= 0

$$\Delta \text{kWh electric resistance heat} = 3460 * ((2.0 - 0.904) / 2.0) + 180 - 1577$$

$$= 499 \text{ kWh}$$

$$\Delta \text{kWh heat pump heat} = 3460 * ((2.0 - 0.904) / 2.0) + 180 - 779$$

$$= 1,297 \text{ kWh}$$

$$\Delta \text{kWh fossil fuel heat} = 3460 * ((2.0 - 0.904) / 2.0) + 180 - 0$$

$$= 2,076 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / \text{Hours} * \text{CF}$$

Where:

Hours	= Full load hours of hot water heater = 2533 <sup>220</sup>
CF	= Summer Peak Coincidence Factor for measure = 0.346 <sup>221</sup>

<sup>215</sup> Assumption taken from; Residential Water Heaters Technical Support Document for the January 17, 2001, Final Rule Table 9.3.9, p9-34, [http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/09.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/09.pdf)  
Consistent with FEMP study; Field Testing of Pre-Production Prototype Residential Heat Pump Water Heaters

[http://www1.eere.energy.gov/femp/pdfs/tir\\_heatpump.pdf](http://www1.eere.energy.gov/femp/pdfs/tir_heatpump.pdf)

<sup>216</sup> Efficiency based on ENERGY STAR Residential Water Heaters, Final Criteria Analysis:  
[http://www.energystar.gov/ia/partners/prod\\_development/new\\_specs/downloads/water\\_heaters/WaterHeaterDraftCriteriaAnalysis.pdf](http://www.energystar.gov/ia/partners/prod_development/new_specs/downloads/water_heaters/WaterHeaterDraftCriteriaAnalysis.pdf)

<sup>217</sup> As above

<sup>218</sup> Determined by calculating the MMBtu removed from the air, applying the REMRate determined percentage (35%) of lighting savings that result in reduced cooling loads (lighting is used as a proxy for hot water heating since load shapes suggest their seasonal usage patterns are similar), assuming a SEER 11 central AC unit, multiplying by 64% to adjust for the percentage of OH homes having cooling (East North Central census division from Energy Information Administration, 2005 Residential Energy Consumption Survey;

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc6airconditioningchar/pdf/tablehc12.6.pdf)), and applying the Discretionary Usage Adjustment of 0.75% (Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31)

<sup>219</sup> Determined by calculating the MMBtu removed from the air, as above, applying the REMRate determined percentage (45%) of lighting savings that result in increased heating loads, converting to kWh and dividing by efficiency of heating system (1.0 for electric resistance, 2.0 for heat pump).

<sup>220</sup> Full load hours assumption based on Efficiency Vermont loadshape, calculated from Itron eShapes.

<sup>221</sup> Calculated from Itron eShapes, which is 8760 hourly data by end use for Upstate New York, adjusted for OH peak definitions. Resultant coincident peak kW is consistent with result shown in FEMP study; Field Testing of Pre-Production Prototype Residential Heat Pump Water Heaters

[http://www1.eere.energy.gov/femp/pdfs/tir\\_heatpump.pdf](http://www1.eere.energy.gov/femp/pdfs/tir_heatpump.pdf)

$\Delta kW$ electric resistance heat	$= 499 / 2533 * 0.346$ $= 0.068 \text{ kW}$
$\Delta kW$ heat pump heat	$= 1297 / 2533 * 0.346$ $= 0.18 \text{ kW}$
$\Delta kW$ fossil fuel heat	$= 2076 / 2533 * 0.346$ $= 0.28 \text{ kW}$

### Fossil Fuel Impact Descriptions and Calculation

(For homes with fossil fuel heating system)

$$\Delta \text{MMBtu} = -7.38 \text{ MMBtu}^{222}$$

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>222</sup> This is the additional energy consumption (therefore a negative value) required to replace the heat removed from the home during the heating season by the heat pump water heater. Determined by calculating the MMBtu removed from the air, applying the REMRate determined percentage (45%) of lighting savings that result in increased heating loads (lighting is used as a proxy for hot water heating since load shapes suggest their seasonal usage patterns are similar), dividing by the efficiency of the heating system (estimated assuming that natural gas central furnace heating is typical for Ohio residences (65% of East North Central census division has a Natural Gas Furnace (based on Energy Information Administration, 2005 Residential Energy Consumption Survey:

[http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc4spaceheating/pdf/tablehc12.4.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc4spaceheating/pdf/tablehc12.4.pdf))

In 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process). Assuming typical efficiencies for condensing and non condensing furnace and duct losses, the average heating system efficiency is estimated as follows:

$(0.4 * 0.92) + (0.6 * 0.8) * (1 - 0.15) = 0.72.$



## Low Flow Faucet Aerator (Time of Sale or Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a low flow (1.5 GPM) faucet aerator in a home. This could be a retrofit direct install measure or a new installation. Both electric and fossil fuel savings are provided, although only savings corresponding to the hot water heating fuel should be claimed.

### Definition of Efficient Equipment

The efficient equipment is a low flow aerator.

### Definition of Baseline Equipment

The baseline equipment is a standard faucet aerator using 2.2 GPM.

### Deemed Calculation for this Measure

$$\begin{aligned}\text{Annual kWh savings} &= \text{ISR} * ((2.2 - \text{GPM}_{\text{low}}) / 2.2) * 77 \\ \text{Summer Coincident Peak savings} &= \Delta \text{kWH} * 0.000125 \\ \text{Annual MMBTU savings} &= \text{ISR} * ((2.2 - \text{GPM}_{\text{low}}) / 2.2) * 0.3435 \\ \text{Annual Water savings (gallons)} &= \text{ISR} * ((2.2 - \text{GPM}_{\text{low}}) / 2.2) * 1398\end{aligned}$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 5 years<sup>223</sup>.

### Deemed Measure Cost

As a retrofit measure, the cost will be the actual cost of the aerator and its installation.

As a measure distributed to, but installed by, participants, the cost will be the cost of the aerator and the distribution costs.

As a time of sale measure, the cost is assumed to be \$2<sup>224</sup>.

### Deemed O&M Cost Adjustments

When a retrofit measure, there would be a very small O&M benefit associated with the deferral of the next replacement, but this has conservatively not been characterized.

### Coincidence Factor

The coincidence factor for this measure is calculated at 0.0026<sup>225</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

If electric domestic hot water heater:

---

<sup>223</sup> Conservative estimate based on review of TRM assumptions from other States.

<sup>224</sup> Navigant Consulting, Ontario Energy Board; "Measures and Assumptions for Demand Side Management (DSM) Planning", April 2009.

<sup>225</sup> Calculated as follows: Assume 13% faucet use takes place during peak hours (based on: [http://www.aquacraft.com/Download\\_Reports/DISAGGREGATED-HOT\\_WATER\\_USE.pdf](http://www.aquacraft.com/Download_Reports/DISAGGREGATED-HOT_WATER_USE.pdf))

13% \* 3.6 minutes per day (10.9 \* 2.56 / 3.5 / 2.2 = 3.6) = 0.47 minutes  
= 0.47 / 180 (minutes in peak period) = 0.00262

$$\Delta kWH = \text{ISR} * (((\text{GPMbase} - \text{GPMlow}) / \text{GPMbase}) * \# \text{ people} * \text{gals/day} * \text{days/year} * \text{DR}) / \text{F/home}) * 8.3 * (\text{Tft} - \text{Tmains}) / 1,000,000) / \text{DHW Recovery Efficiency} / 0.003412$$

Where:

ISR	= In Service Rate or fraction of units that get installed
Retrofit/Direct Install	= 1.0
Customer self install	= 0.48 <sup>226</sup>
GPMbase	= Gallons Per Minute of baseline faucet = 2.2 <sup>227</sup>
GPMlow	= Gallons Per Minute of low flow faucet = Actual
# people	= Average number of people per household = 2.46 <sup>228</sup>
gals/day	= Average gallons per day used by all faucets in home = 10.9 <sup>229</sup>
days/y	= Days faucet used per year = 365
DR	= Percentage of water flowing down drain (if water is collected in a sink, a faucet aerator will not result in any saved water) = 50% <sup>230</sup>
F/home	= Average number of faucets in the home = 3.5 <sup>231</sup>
8.3	= Constant to convert gallons to lbs
Tft	= Assumed temperature of water used by faucet = 80 <sup>232</sup>
Tmains	= Assumed temperature of water entering house = 57.8 <sup>233</sup>
DHW Recovery Efficiency	= Recovery efficiency of electric hot water heater = 0.98 <sup>234</sup>
0.003412	= Constant to converts MMBtu to kWh

For example, a 1.5GPM direct installation:

$$\Delta kWH = 1.0 * (((2.2 - 1.5) / 2.2) * 2.46 * 10.9 * 365 * 0.5)) / 3.5 * 8.3 * (80 - 57.8) / 1,000,000) / 0.98 / 0.003412$$

$$= 24.5 \text{ kWh}$$

<sup>226</sup> EGD\_2009\_DSM\_Annual Report from table 27 survey of Install rates: Overall averages of 62% and 34% for kitchen and bath aerators respectively are averaged to get 48%. There is significant variation in rates by building type, aerator type, and distribution so surveying participants is encouraged

<sup>227</sup> In 1998, the Department of Energy adopted a maximum flow rate standard of 2.2 gpm at 60 psi for all faucets: 63 Federal Register 13307; March 18, 1998.

<sup>228</sup> US Energy Information Administration, Residential Energy Consumption Survey, East North Central Census Division; [http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc3demographics/pdf/tablehc12.3.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc3demographics/pdf/tablehc12.3.pdf)

<sup>229</sup> Most commonly quoted value of gallons of water used per person per day (including in U.S. Environmental Protection Agency's "water sense" documents; [http://www.epa.gov/watersense/docs/home\\_suppstat508.pdf](http://www.epa.gov/watersense/docs/home_suppstat508.pdf))

<sup>230</sup> Estimate consistent with Ontario Energy Board, "Measures and Assumptions for Demand Side Management Planning"

<sup>231</sup> Estimate based on East Bay Municipal Utility District; "Water Conservation Market Penetration Study"

[http://www.ebmud.com/sites/default/files/pdfs/market\\_penetration\\_study\\_0.pdf](http://www.ebmud.com/sites/default/files/pdfs/market_penetration_study_0.pdf)

<sup>232</sup> Connecticut Energy Efficiency Fund; CL&P and UI Program Savings Documentation for 2008 Program Year

<sup>233</sup> Annual average of all cities obtained from OH Joint Utility TRM; Table 39: Monthly Mains Water Temperature for Selected Cities (°F).

<sup>234</sup> Electric water heater have recovery efficiency of 98%: <http://www.ahrinet.org/ARI/util/showdoc.aspx?doc=576>

### Summer Coincident Peak Demand Savings

$$\Delta kW = \Delta kWh / \text{hours} * CF$$

Where:

$$\begin{aligned} \text{Hours} &= \text{Average number of hours per year spent using faucet} \\ &= (\text{Gal/person} * \# \text{ people} * 365) / F / \text{home} / \text{GPM} / 60 \\ &= (10.9 * 2.46 * 365) / 3.5 / 2.2 / 60 \\ &= 21 \text{ hours} \\ CF &= \text{Summer Peak Coincidence Factor for measure} \\ &= 0.00262 \end{aligned}$$

For example, a 1.5GPM direct installation:

$$\begin{aligned} \Delta kW &= 24.5 / 21 * 0.00262 \\ &= 0.0031 \text{ kW} \end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

If fossil fuel domestic hot water heater, MMBtu savings provided below:

$$\Delta \text{MMBtu} = \text{ISR} * (((\text{GPM}_{\text{base}} - \text{GPM}_{\text{low}}) / \text{GPM}_{\text{base}}) * \# \text{ people} * \text{gals/day} * \text{days/year} * \text{DR}) / F / \text{home}) * 8.3 * (T_{\text{ft}} - T_{\text{mains}}) / 1,000,000 / \text{Gas DHW Recovery Efficiency}$$

Where:

$$\begin{aligned} \text{Gas DHW Recovery Efficiency} &= \text{Recovery efficiency of electric hot water heater} \\ &= 0.75^{235} \end{aligned}$$

For example, a 1.5GPM direct installation:

$$\begin{aligned} \Delta \text{MMBtu} &= 1.0 * (((2.2 - 1.5) / 2.2) * 2.46 * 10.9 * 365 * 0.5)) / 3.5 * 8.3 * (80 - 57.8) / 1,000,000 / 0.75 \\ &= 0.109 \text{ MMBtu} \end{aligned}$$

### Water Impact Descriptions and Calculation

$$\text{Water Savings} = \text{ISR} * (((\text{GPM}_{\text{base}} - \text{GPM}_{\text{low}}) / \text{GPM}_{\text{base}}) * \# \text{ people} * \text{gals/day} * \text{days/year} * \text{DR}) / F / \text{home})$$

For example, a 1.5GPM direct installation:

$$\begin{aligned} \text{Water Savings} &= 1.0 * (((2.2 - 1.5) / 2.2) * 2.46 * 10.9 * 365 * 0.5)) / 3.5 \\ &= 445 \text{ gallons} \end{aligned}$$

### Deemed O&M Cost Adjustment Calculation

When a retrofit measure, there would be a very small O&M benefit associated with the deferral of the next replacement, but this has conservatively not been characterized.

---

<sup>235</sup> Review of AHRI Directory suggests range of recovery efficiency ratings for new Gas DHW units of 70-87%. Average of existing units is estimated at 75%

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Low Flow Showerhead (Time of Sale or Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a low flow showerhead in a home. This is a retrofit direct install measure or a new installation. Both electric and fossil fuel savings are provided, although only savings corresponding to the hot water heating fuel should be claimed.

### Definition of Efficient Equipment

The efficient condition is a low flow showerhead.

### Definition of Baseline Equipment

The baseline is a standard showerhead using 2.87 GPM<sup>236</sup>.

### Deemed Calculation for this Measure

$$\begin{aligned}\text{Annual kWh savings} &= \text{ISR} * (2.87 - \text{GPM}_{\text{low}}) * 179 \\ \text{Summer Coincident Peak savings} &= \Delta \text{kWh} * 0.000112 \\ \text{Annual MMBTU savings} &= \text{ISR} * (2.87 - \text{GPM}_{\text{low}}) * 0.8 \\ \text{Annual Water savings (gal)} &= \text{ISR} * ((2.87 - \text{GPM}_{\text{low}}) / 2.87) * 4960\end{aligned}$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 5 years<sup>237</sup>.

### Deemed Measure Cost

As a retrofit measure, the incremental cost will be the cost of the showerhead including its installation.

As a measure distributed to, but installed by, participants, the cost will be the cost of the showerhead and the distribution costs.

As a time of sale measure, the incremental cost is assumed to be \$6<sup>238</sup>.

### Deemed O&M Cost Adjustments

When a retrofit measure, there would be a very small O&M benefit associated with the deferral of the next replacement, but this has conservatively not been characterized.

### Coincidence Factor

The coincidence factor for this measure is calculated at 0.00371<sup>239</sup>.

<sup>236</sup> Average flow rate of replaced showerhead from Enbridge Gas Distribution Inc., April 2010; "Demand Side Management 2009 DSM Draft Annual Report", p77-78. Calculated with the average flow rate of units between 2 and 2.5GPM of 2.45GPM, average flow rate of units greater than 2.5GPM of 3.07, and 33% of all units between 2 and 2.5%, 67% of units over 2.5GPM;  $(2.45 * 0.33) + (3.07 * 0.67) = 2.87 \text{ GPM}$

<sup>237</sup> Conservative estimate based on review of TRM assumptions from other States.

<sup>238</sup> Navigant Consulting, Ontario Energy Board, "Measures and Assumptions for Demand Side Management (DSM) Planning", April 2009.

<sup>239</sup> Calculated as follows: Assume 9% showers take place during peak hours (based on: [http://www.aquacraft.com/Download\\_Reports/DISAGGREGATED-HOT\\_WATER\\_USE.pdf](http://www.aquacraft.com/Download_Reports/DISAGGREGATED-HOT_WATER_USE.pdf))  
 $9\% * 7.42 \text{ minutes per day} (11.6 * 2.56 / 1.6 / 2.5 = 7.42) = 0.668 \text{ minutes}$   
 $= 0.668 / 180 \text{ (minutes in peak period)} = 0.00371$

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

If electric domestic hot water heater:

$$\Delta \text{kWh} = \text{ISR} * (\text{GPM}_{\text{base}} - \text{GPM}_{\text{low}}) * \text{kWh/GPM}_{\text{reduced}}$$

Where:

ISR	= In Service Rate or fraction of units that get installed
Retrofit/Direct Install	= 1.0
Customer self install	= 0.81 <sup>240</sup>
GPM <sub>base</sub>	= Gallons Per Minute of baseline showerhead = 2.87 <sup>241</sup>
GPM <sub>low</sub>	= Gallons Per Minute of low flow showerhead = Actual
kWh/GPM <sub>reduced</sub>	= Assumed kWh savings per GPM reduction = 149kWh per gallon reduced <sup>242</sup>

For example, a 2.0 GPM direct installation:

$$\begin{aligned}\Delta \text{kWh} &= 1.0 * (2.87 - 2.0) * 149 \\ &= 130 \text{ kWh}\end{aligned}$$

#### Summer Coincident Peak Demand Savings

If electric domestic hot water heater:

$$\Delta \text{kW} = \Delta \text{kWh/Hours} * \text{CF}$$

Where:

Hours	= Average number of hours per year spent using shower head = (Gal/person * # people * days/y) / SH/home / GPM / 60
gals/day	= Average gallons per day used for showering = 11.6 <sup>243</sup>
# people	= Average number of people per household = 2.46 <sup>244</sup>
days/y	= Days shower used per year = 365

---

<sup>240</sup> EGD\_2009\_DSM\_Annual Report from table 27 survey of Install rates: Overall averages 81%. There may be significant variations due to specifics of the program distribution, so surveying participants is encouraged.

<sup>241</sup> The Energy Policy Act of 1992 (EPAct) established the maximum flow rate for showerheads at 2.5 gallons per minute (gpm).

<sup>242</sup> This is based on an Enbridge metering study (Enbridge Gas Distribution Inc., April 2010; "Demand Side Management 2009 DSM Draft Annual Report", p75) that found 46m<sup>3</sup> of natural gas savings when replacing all existing showerheads (with average flow rate of 2.45 GPM) with 1.25GPM showerheads (the replacement GPM and the number of showers per home (2.1) were determined during personal conversations with study authors). This equates to 0.66MMBtu of savings per showerhead per 1GPM reduction. This is converted to kWh by multiplying by the recovery efficiency of a gas heater (0.75 based on review of AHRI Directory) over the recovery efficiency of an electric heater (0.98 from: <http://www.ahrinet.org/ARI/util/showdoc.aspx?doc=576>) and multiplying by 293 (kWh/MMBtu).

<sup>243</sup> Most commonly quoted value of gallons of water used per person per day (including in U.S. Environmental Protection Agency's "water sense" documents; [http://www.epa.gov/watersense/docs/home\\_suppstat508.pdf](http://www.epa.gov/watersense/docs/home_suppstat508.pdf))

<sup>244</sup> US Energy Information Administration, Residential Energy Consumption Survey, East North Central Census Division; [http://www.eia.doe.gov/emeu/recs/recs2005/hc2005\\_tables/hc3demographics/pdf/tablehc12.3.pdf](http://www.eia.doe.gov/emeu/recs/recs2005/hc2005_tables/hc3demographics/pdf/tablehc12.3.pdf)

$$\begin{aligned}\text{Showers/home} &= \text{Average number of showers in the home} \\ &= 2.1^{245}\end{aligned}$$

$$\begin{aligned}\text{CF} &= (11.6 * 2.46 * 365) / 2.1 / 2.87 / 60 \\ &= 29 \text{ hours} \\ &= \text{Summer Peak Coincidence Factor for measure} \\ &= 0.00371^{246}\end{aligned}$$

For example, a 2.0 GPM direct installation:

$$\begin{aligned}\Delta \text{kW} &= 130 / 29 * 0.00371 \\ &= 0.017 \text{ kW}\end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

If fossil fuel domestic hot water heater:

$$\Delta \text{MMBtu} = \text{ISR} * (\text{GPM}_{\text{base}} - \text{GPM}_{\text{low}}) * \text{MMBtu/GPM}_{\text{reduced}}$$

Where:

$$\begin{aligned}\text{MMBtu/GPM}_{\text{reduced}} &= \text{Assumed MMBtu savings per GPM reduction} \\ &= 0.66 \text{ MMBtu per gallon reduced}^{247}\end{aligned}$$

For example, a 2.0 GPM direct installation:

$$\begin{aligned}\Delta \text{MMBtu} &= 1.0 * (2.87 - 2.0) * 0.66 \\ &= 0.6 \text{ MMBtu}\end{aligned}$$

### Water Impact Descriptions and Calculation

$$\begin{aligned}\text{Water Savings} &= \text{ISR} * (((\text{GPM}_{\text{base}} - \text{GPM}_{\text{low}}) / \text{GPM}_{\text{base}}) * \# \text{ people} * \text{gals/day} * \\ &\quad \text{days/year}) / \text{SH/home}\end{aligned}$$

For example, a 2.0 GPM direct installation:

$$\begin{aligned}\text{Water Savings} &= 1.0 * (((2.87 - 2.0) / 2.87) * 2.46 * 11.6 * 365) / 2.1 \\ &= 1,504 \text{ gallons}\end{aligned}$$

### Deemed O&M Cost Adjustment Calculation

When a retrofit measure, there would be a very small O&M benefit associated with the deferral of the next replacement, but this has conservatively not been characterized.

<sup>245</sup> Personal communication with authors of Enbridge Gas Distribution Inc., April 2010; “Demand Side Management 2009 DSM Draft Annual Report”

<sup>246</sup> Calculated as follows: Assume 9% showers take place during peak hours (based on: [http://www.aquacraft.com/Download\\_Reports/DISAGGREGATED-HOT\\_WATER\\_USE.pdf](http://www.aquacraft.com/Download_Reports/DISAGGREGATED-HOT_WATER_USE.pdf))  
 $9\% * 7.42 \text{ minutes per day} (11.6 * 2.56 / 1.6 / 2.5 = 7.42) = 0.668 \text{ minutes}$   
 $= 0.668 / 180 \text{ (minutes in peak period)} = 0.00371$

<sup>247</sup> This is based on an Enbridge metering study (Enbridge Gas Distribution Inc., April 2010; “Demand Side Management 2009 DSM Draft Annual Report”, p75) that found 46m<sup>3</sup> of natural gas savings when replacing all existing showerheads (with average flow rate of 2.45 GPM) with 1.25GPM showerheads (the replacement GPM and the number of showers per home (2.1) were determined during personal conversations with study authors). This equates to 0.66MMBtu of savings per showerhead per 1GPM reduction.

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)



## Domestic Hot Water Pipe Insulation (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes adding insulation to un-insulated domestic hot water pipes. The measure assumes the pipe wrap is installed to the first length of both the hot and cold pipe up to the first elbow.

### Definition of Efficient Equipment

To efficiency case is installing pipe wrap insulation to a length of hot water carrying copper pipe.

### Definition of Baseline Equipment

The baseline is an un-insulated hot water carrying copper pipe.

### Deemed Calculation for this Measure

$$\text{Annual kWh savings (electric DHW systems)} = ((1 - 1/R_{\text{new}}) * (L * C) * 170.2$$

$$\text{Summer Coincident Peak Savings (electric DHW systems)} = \Delta \text{kWh}/8760$$

$$\text{Annual MMBtu savings (fossil fuel DHW systems)} = ((1 - 1/R_{\text{new}}) * (L * C) * 0.569$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 15 years<sup>248</sup>.

### Deemed Measure Cost

The measure cost including material and installation is assumed to be \$3 per linear foot<sup>249</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

This measure assumes a flat loadshape and as such the coincidence factor is 1.

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

For electric DHW systems:

$$\Delta \text{kWh} = ((1/R_{\text{exist}} - 1/R_{\text{new}}) * (L * C) * \Delta T * 8,760) / \eta_{\text{DHW}} / 3413$$

Where:

R <sub>exist</sub>	= Pipe heat loss coefficient of uninsulated pipe (existing) (Btu/hr-°F-ft)
	= 1.0 <sup>250</sup>
R <sub>new</sub>	= Pipe heat loss coefficient of insulated pipe (new) (Btu/hr-°F-ft)

<sup>248</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.  
<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>249</sup> Consistent with DEER 2008 Database Technology and Measure Cost Data ([www.deeresources.com](http://www.deeresources.com)).

<sup>250</sup> Navigant Consulting Inc., April 2009; "Measures and Assumptions for Demand Side Management (DSM) Planning; Appendix C Substantiation Sheets", p77.

	= Actual
L	= Length of pipe from water heating source covered by pipe wrap (ft)
	= actual
C	= Circumference of pipe (ft) (Diameter (in) * $\pi$ * 0.083)
	= actual (0.5" pipe = 0.13ft, 0.75" pipe = 0.196ft)
$\Delta T$	= Average temperature difference between supplied water and outside air temperature (°F)
	= 65°F <sup>251</sup>
8,760	= Hours per year
$\eta_{DHW}$	= Recovery efficiency of electric hot water heater
	= 0.98 <sup>252</sup>
3413	= Conversion from Btu to kWh

For example, insulating 5 feet of 0.75" pipe with R-4 wrap:

$$\begin{aligned}\Delta kWh &= ((1/R_{exist} - 1/R_{new}) * (L * C) * \Delta T * 8,760) / \eta_{DHW} / 3413 \\ &= ((1/1 - 1/5) * (5 * 0.196) * 65 * 8760) / 0.98 / 3413 \\ &= 133 \text{ kWh}\end{aligned}$$

#### Summer Coincident Peak Demand Savings

$$\Delta kW = \Delta kWh / 8760$$

Where:

$\Delta kWh$	= kWh savings from pipe wrap installation
8760	= Number of hours in a year (since savings are assumed to be constant over year).

For example, insulating 5 feet of 0.75" pipe with R-4 wrap:

$$\begin{aligned}\Delta kW &= 133 / 8760 \\ &= 0.015 \text{ kW}\end{aligned}$$

#### Fossil Fuel Impact Descriptions and Calculation

For fossil fuel DHW systems:

$$\Delta \text{MMBtu} = ((1/R_{exist} - 1/R_{new}) * (L * C) * \Delta T * 8,760) / \eta_{DHW} / 1,000,000$$

Where:

$\eta_{DHW}$	= Recovery efficiency of gas hot water heater
	= 0.75 <sup>253</sup>

For example, insulating 5 feet of 0.75" pipe with R-4 wrap:

$$\begin{aligned}\Delta \text{MMBtu} &= ((1/1 - 1/5) * (5 * 0.196) * 65 * 8760) / 0.75 / 1,000,000 \\ &= 0.60 \text{ MMBtu}\end{aligned}$$

<sup>251</sup> Assumes 130°F water leaving the hot water tank and average temperature of basement of 65°F.

<sup>252</sup> Electric water heater have recovery efficiency of 98%: <http://www.ahrinet.org/ARI/util/showdoc.aspx?doc=576>

<sup>253</sup> Review of AHRI Directory suggests range of recovery efficiency ratings for new Gas DHW units of 70-87%. Average of existing units is estimated at 75%

**Water Impact Descriptions and Calculation**

n/a

**Deemed O&M Cost Adjustment Calculation**

n/a

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Wall Insulation (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure characterization is for the installation of new additional insulation in the walls of a residential building. The measure assumes that an auditor, contractor or utility staff member is on location, and will measure and record the existing and new insulation depth and type (to calculate R-values), the surface area of insulation added, and the efficiency of the heating system used in the home.

### Definition of Efficient Equipment

The new insulation should meet any qualification criteria required for participation in the program. The new insulation R-value should include the total wall assembly and include any existing insulation that is left in situ.

### Definition of Baseline Equipment

The existing insulation R-value should include the total wall assembly. An R-value of 5 should be assumed for the wall assembly plus the R-value of any existing insulation<sup>254</sup>.

### Deemed Calculation for this Measure

Air conditioning Savings

$$\text{Annual kWh Savings} = ((1/R_{\text{exist}} - 1/R_{\text{new}}) * CDH * 0.75 * \text{Area}) / 1000 / \eta_{\text{Cool}}$$

$$\text{Summer Coincident Peak kW Savings} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * 0.5$$

Space Heating Savings:

Annual MMBTU Savings (fossil fuel heating)

$$= ((1/R_{\text{exist}} - 1/R_{\text{new}}) * HDD * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}}$$

Annual kWh Savings (electric heating)

$$= (((1/R_{\text{exist}} - 1/R_{\text{new}}) * HDD * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}}) * 293.1$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 25 years<sup>255</sup>.

### Deemed Measure Cost

The actual insulation installation measure cost should be used.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>256</sup>.

<sup>254</sup> The R-5 assumption for wall assembly is based on J.Neymark & Associates and National Renewable Energy Laboratory, June 2009; "BESTEST-EX Interim Test Procedure" p25.

<sup>255</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>256</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta kWh = ((1/R_{exist} - 1/R_{new}) * CDH * DUA * Area) / 1000 / \eta_{Cool}$$

Where:

- $R_{exist}$  = existing effective whole-assembly thermal resistance value or R-value<sup>257</sup>  
 = actual recorded
- $R_{new}$  = new total effective whole-assembly thermal resistance value or R-value<sup>258</sup>  
 = actual recorded
- $CDH$  = Cooling Degree Hours<sup>259</sup>.  
 Dependent on location:

Location	Cooling Degree Hours (75°F set point)
Akron	3,986
Cincinnati	7,711
Cleveland	5,817
Columbus	4,367
Dayton	5,934
Toledo	4,401
Youngtown	3,689

- $DUA$  = Discretionary Use Adjustment to account for the fact that people do not always operate their air conditioning system when the outside temperature is greater than 75°F  
 = 0.75<sup>260</sup>
- $Area$  = Square footage of insulated area  
 = actual recorded
- $\eta_{Cool}$  = Efficiency of Air Conditioning equipment  
 = actual recorded

For example, insulating 300 square feet of wall area from R-5 to R-20, in a Cincinnati home with AC SEER 10:

$$\begin{aligned} \Delta kWh &= ((1/R_{exist} - 1/R_{new}) * CDH * DUA * Area) / 1000 / \eta_{Cool} \\ &= ((1/5 - 1/20) * 7711 * 0.75 * 300) / 1000 / 10 \\ &= 26 kWh \end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\Delta kW = \Delta kWh / FLH_{cool} * CF$$

Where:

- $FLH_{cool}$  = Full load cooling hours

Dependent on location as below:

---

<sup>257</sup> If uninsulated assembly assume R-5.

<sup>258</sup> Include the R-value for any existing insulation remaining.

<sup>259</sup> Derived by summing the delta between the average outdoor temperature and the base set point of 75 degrees (above which cooling is assumed to be used) each hour of the year. Hourly temperature data obtained from TMY3 data (<http://rredc.nrel.gov/solar/>)

<sup>260</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31

Location	Run Hours <sup>261</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>262</sup>

For example, insulating 300 square feet of an attic floor from R-5 to R-20, in a Cincinnati home with AC SEER 10:

$$\begin{aligned}\Delta kW &= \Delta kWh / FLH_{cool} * CF \\ &= 26 / 747 * 0.5 \\ &= 0.017 \text{ kW}\end{aligned}$$

### Space Heating Savings Calculation

$$\Delta \text{MMBTU} = ((1/R_{\text{exist}} - 1/R_{\text{new}}) * \text{HDD} * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}}$$

Where:

HDD = Heating Degree Days (60° base temperature) for location<sup>263</sup>

Location	Heating Degree Days (60°F base temperature)
Akron	4,848
Cincinnati	3,853
Cleveland	4,626
Columbus	4,100
Dayton	4,430
Toledo	4,482
Youngstown	4,887

$\eta_{\text{Heat}}$  = Average Net Heating System Efficiency (Equipment Efficiency \* Distribution Efficiency)<sup>264</sup>

<sup>261</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; “National Energy Savings Potential From Addressing Residential HVAC Installation Problems”). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research.”

<sup>262</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32

<sup>263</sup> The 10 year average annual heating degree day value, using a balance point for heating equipment use of 60 degrees was calculated for each location based on data obtained from <http://www.engr.udayton.edu/weather/>. The 60 degree balance point is used based on a PRISM evaluation of approximately 600,000 Ohio residential single family customers.

<sup>264</sup> The System Efficiency can be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

If there are more than one heating systems, the weighted (by consumption) average efficiency should be used. If the heating system or distribution is being upgraded within a package of measures together with the insulation upgrade, the new average heating system efficiency should be used.

= actual recorded

**Note for homes with electric heat (resistance or heat pump), follow the MMBTU formula above and convert to kWh by multiplying by 293.1. For heat pumps the equipment efficiency used in the above algorithm should be the Coefficient Of Performance or COP (i.e., divide HSPF by 3.412; e.g., HSPF 7.7 is COP of 2.26).**

For example, insulating 300 square feet of an attic floor from R-5 to R-20, in a Cincinnati home with heating system efficiency of 70%:

$$\begin{aligned}\Delta\text{MMBTU} &= ((1/R_{\text{exist}} - 1/R_{\text{new}}) * \text{HDD} * 24 * \text{Area}) / 1,000,000 / \eta_{\text{Heat}} \\ &= ((1/5 - 1/20) * 3,992 * 24 * 300) / 1,000,000 / 0.7 \\ &= 6.2 \text{ MMBtu}\end{aligned}$$

#### **Water Impact Descriptions and Calculation**

n/a

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Air Sealing - Reduce Infiltration (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure characterization is for the improvement of a building's air-barrier, which together with its insulation defines the thermal boundary of the conditioned space. Air-leakage in buildings represents from 5% to 40% of the space conditioning costs<sup>265</sup> but is also very difficult to control. The measure assumes that a trained auditor, contractor or utility staff member is on location, and will measure and record the existing air-leakage rate<sup>266</sup> and post air-sealing leakage using a blower door, and the efficiency of the heating and cooling system used in the home.

### Definition of Efficient Equipment

Air sealing materials and diagnostic testing should meet all eligibility program qualification criteria. The initial and final tested leakage rates should be performed in such a manner that the identified reductions can be properly discerned, particularly in situations wherein multiple building envelope measures may be implemented simultaneously.

### Definition of Baseline Equipment

The existing air leakage should be determined through approved and appropriate test methods. The baseline condition of a building upon first inspection significantly impacts the opportunity for cost-effective energy savings through air-sealing.

### Deemed Calculation for this Measure

$$\text{Annual Cooling kWh Savings} = (((\text{CFM50Exist} - \text{CFM50New}) / 29.4) * 60 * \text{CDH} * 0.0135) / 1000 / \eta_{\text{Cool}}$$

$$\text{Summer Coincident Peak kW Savings} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * 0.5$$

Space Heating Savings:

$$\begin{aligned} \text{MMBTU Savings (fossil fuel heating)} &= (((\text{CFM50Exist} - \text{CFM50New}) / \text{N-factor}) * 60 * 24 * \text{HDD} * \\ &0.018) / 1,000,000 / \eta_{\text{Heat}} \end{aligned}$$

$$\begin{aligned} \text{kWh Savings (electric heating)} &= (((\text{CFM50Exist} - \text{CFM50New}) / \text{N-factor}) * 60 * 24 * \text{HDD} * \\ &0.018) / 1,000,000 / \eta_{\text{Heat}} * 293.1 \end{aligned}$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 15 years<sup>267</sup>.

### Deemed Measure Cost

The actual air sealing measure cost should be used.

### Deemed O&M Cost Adjustments

n/a

<sup>265</sup> Krigger, J. Dorsi, C. "Residential Energy" 2004, p.73

<sup>266</sup> In accordance with industry best practices see: BPI Building Analyst and Envelope Professional standards, [http://www.bpi.org/standards\\_approved.aspx](http://www.bpi.org/standards_approved.aspx)

<sup>267</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>



### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>268</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings (Space Cooling – if home has Central AC)

$$\Delta kWh = \frac{(((CFM50_{Exist} - CFM50_{New}) / N\text{-factor}) * 60 * CDH * DUA * 0.018) / 1000}{\eta_{Cool}}$$

Where:

CFM50Exist	= Existing Cubic Feet per Minute at 50 Pascal pressure differential as measured by the blower door before airsealing. = actual recorded
CFM50New	= New Cubic Feet per Minute at 50 Pascal pressure differential as measured by the blower door after airsealing. = actual recorded
N-Factor	= Conversion factor to convert 50-pascal air flows to natural airflow. = 29.4 <sup>269</sup>
60	= Constant to convert cubic feet per minute to cubic feet per hour
CDH	= Cooling Degree Hours <sup>270</sup> .

Dependent on location:

Location	Cooling Degree Hours (75°F set point)
Akron	3,986
Cincinnati	7,711
Cleveland	5,817
Columbus	4,367
Dayton	5,934
Toledo	4,401
Youngtown	3,689

DUA	= Discretionary Use Adjustment to account for the fact that people do not always operate their air conditioning system when the outside temperature is greater than 75°F = 0.75 <sup>271</sup>
0.018	= The volumetric heat capacity of air (Btu/ft <sup>3</sup> °F)
$\eta_{Cool}$	= Efficiency of Air Conditioning equipment = actual recorded

For example, reducing air leakage in a Toledo home from 5000CFM50 to 3500CFM50, with SEER 10 AC:

$$\Delta kWh = \frac{(((5000 - 3500) / 29.4) * 60 * 4401 * 0.75 * 0.018) / 1,000}{10}$$

---

<sup>268</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32

<sup>269</sup> Maximum n-factor from methodology developed by the Lawrence Berkeley Laboratory (LBL), since minimal stack effect for cooling savings.

<sup>270</sup> Derived by summing the delta between the average outdoor temperature and the base set point of 75 degrees (above which cooling is assumed to be used) each hour of the year. Hourly temperature data obtained from TMY3 data (<http://rredc.nrel.gov/solar/>)

<sup>271</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p31

$$= 18 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * \text{CF}$$

Where:

$\text{FLH}_{\text{cool}}$  = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>272</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>273</sup>

For example, reducing air leakage in a Toledo home from 5000CFM50 to 3500CFM50, with SEER 10 AC:

$$\begin{aligned} \Delta \text{kW} &= 18 / 428 * 0.5 \\ &= 0.021 \text{ kW} \end{aligned}$$

### Space Heating Savings Calculation

$$\Delta \text{MMBTU} = (((\text{CFM50}_{\text{Exist}} - \text{CFM50}_{\text{New}}) / \text{N-factor}) * 60 * 24 * \text{HDD} * 0.018) / 1,000,000 / \eta_{\text{Heat}}$$

Where:

HDD = Heating Degree Days (60° base temperature) for location<sup>274</sup>

Location	Heating Degree Days (60°F base temperature)
Akron	4,848
Cincinnati	3,853
Cleveland	4,626
Columbus	4,100
Dayton	4,430
Toledo	4,482
Youngstown	4,887

<sup>272</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; “National Energy Savings Potential From Addressing Residential HVAC Installation Problems”). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research.”

<sup>273</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32

<sup>274</sup> The 10 year average annual heating degree day value, using a balance point for heating equipment use of 60 degrees was calculated for each location based on data obtained from <http://www.engr.udayton.edu/weather/>. The 60 degree balance point is used based on a PRISM evaluation of approximately 600,000 Ohio residential single family customers.

$$\begin{aligned}\eta_{\text{Heat}} &= \text{Average Net Heating System Efficiency (Equipment Efficiency * Distribution Efficiency)}^{275} \\ &= \text{actual recorded}\end{aligned}$$

For example, reducing air leakage in a 2 story, well-shielded Toledo home from 5000CFM50 to 3500CFM50, with a gas heating system with efficiency of 70%:

$$\begin{aligned}\Delta \text{MMBTU} &= (((5000 - 3500) / 17.8) * 60 * 24 * 4569 * 0.018) / 1,000,000 / 0.7 \\ &= 14.3 \text{ MMBtu}\end{aligned}$$

**Note for homes with electric heat (resistance or heat pump), follow the MMBTU formula above and convert to kWh by multiplying by 293.1. For heat pumps the equipment efficiency used in the above algorithm should be the Coefficient Of Performance or COP (i.e., divide HSPF by 3.412; e.g., HSPF 7.7 is COP of 2.26).**

For example, reducing air leakage in a 2-story, well-shielded Toledo home from 5000CFM50 to 3500CFM50, with electric resistance heating:

$$\begin{aligned}\Delta \text{MMBTU} &= (((5000 - 3500) / 17.8) * 60 * 24 * 4569 * 0.018) / 1,000,000 / 1.0 * 293.1 \\ &= 2925 \text{ kWh}\end{aligned}$$

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>275</sup> The System Efficiency can be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

If there is more than one heating system, the weighted (by consumption) average efficiency should be used.

If the heating system or distribution is being upgraded within a package of measures together with the insulation upgrade, the new average heating system efficiency should be used.

In the case of electric heat use 1.0 as the heating system efficiency, and for heat pumps use COP (HSPF/3.412).

## Duct Sealing (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes evaluating the savings associated with performing duct sealing using mastic sealant or metal tape (meeting U.L. 181 requirements) to the distribution system of homes with either central air conditioning or a ducted heating system.

Two methodologies for estimating the savings associate from sealing the ducts are provided. The first preferred method requires the use of a blower door and the second requires careful inspection of the duct work.

1. **Modified Blower Door Subtraction** – this technique is described in detail on p44 of the Energy Conservatory Blower Door Manual; <http://www.energyconservatory.com/download/bdmanual.pdf>
2. **Evaluation of Distribution Efficiency** – this methodology requires the evaluation of three duct characteristics below, and use of the Building Performance Institutes ‘Distribution Efficiency Look-Up Table’;  
<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>
  - a. Percentage of duct work found within the conditioned space
  - b. Duct leakage evaluation
  - c. Duct insulation evaluation

### Definition of Efficient Equipment

The efficient condition is sealed duct work throughout the unconditioned space in the home.

### Definition of Baseline Equipment

The existing baseline condition is leaky duct work within the unconditioned space in the home.

### Deemed Calculation for this Measure

$$\text{Annual kWh savings} = \frac{(((\text{CFM50}_{\text{Whole House}} - \text{CFM50}_{\text{Envelope Only}}) * \text{SCF})_{\text{before}} - (\text{CFM50}_{\text{Whole House}} - \text{CFM50}_{\text{Envelope Only}}) * \text{SCF})_{\text{after}} * 60 * \text{CDH} * 0.0135)}{1000 / \eta_{\text{Cool}}}$$

$$\text{Or} = ((\text{DE}_{\text{after}} - \text{DE}_{\text{before}}) / \text{DE}_{\text{after}}) * \text{FLH}_{\text{cool}} * \text{BtuH} * (1/\text{SEER})/1000$$

$$\text{Summer Coincident Peak kW savings} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * 0.5$$

$$\text{Annual MMBtu savings (fossil fuel)} = \frac{(((\text{CFM50}_{\text{Whole House}} - \text{CFM50}_{\text{Envelope Only}}) * \text{SCF})_{\text{before}} - (\text{CFM50}_{\text{Whole House}} - \text{CFM50}_{\text{Envelope Only}}) * \text{SCF})_{\text{after}} * 60 * 24 * \text{HDD} * 0.018)}{1,000,000 / \eta_{\text{Heat}}}$$

$$\text{Annual MMBtu savings (electric)} = (((\text{CFM50}_{\text{Whole House}} - \text{CFM50}_{\text{Envelope Only}}) * \text{SCF})_{\text{before}} -$$

$$(CFM50_{\text{Whole House}} - CFM50_{\text{Envelope Only}}) * SCF_{\text{after}} * 60 * 24 * HDD * 0.018 / 1,000,000 / \eta_{\text{Heat}} * 293.1$$

Or

$$\begin{aligned} \text{Annual MMBtu savings (fossil fuel)} &= ((DE_{\text{after}} - DE_{\text{before}}) / DE_{\text{after}}) * 71.2 \\ \text{Annual MMBtu savings (electric)} &= ((DE_{\text{after}} - DE_{\text{before}}) / DE_{\text{after}}) * FLH_{\text{heat}} * \text{BtuH} * (1/COP * 3.413) / 1000 \end{aligned}$$

### Deemed Lifetime of Efficient Equipment

The assumed lifetime of this measure is 20 years<sup>276</sup>.

### Deemed Measure Cost

The actual duct sealing measure cost should be used.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>277</sup>.

---



---

## REFERENCE SECTION

---



---

### Calculation of Savings

#### Energy Savings

#### *Methodology 1: Modified Blower Door Subtraction*

Determine Duct Leakage rate before and after performing duct sealing:

$$\text{Duct Leakage (CFM50}_{\text{DL}}) = (CFM50_{\text{Whole House}} - CFM50_{\text{Envelope Only}}) * SCF$$

Where:

CFM50<sub>Whole House</sub> = Standard Blower Door test result finding Cubic Feet per Minute at 50 Pascal pressure differential

CFM50<sub>Envelope Only</sub> = Blower Door test result finding Cubic Feet per Minute at 50 Pascal pressure differential with all supply and return registers sealed.

SCF = Subtraction Correction Factor to account for underestimation of duct leakage due to connections between the duct system and the home. Determined by measuring pressure in duct system with registers sealed and using look up table provided by Energy Conservatory.

Calculate Energy Savings:

$$\Delta kWh_{\text{cooling}} = ((CFM50_{\text{DL before}} - CFM50_{\text{DL after}}) * 60 * CDH * DUA * 0.018) / 1000 / \eta_{\text{Cool}}$$

<sup>276</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>277</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32

Where:

CFM50<sub>DL before</sub> = Duct Leakage rate before duct sealing  
 = calculated as above  
 CFM50<sub>DL after</sub> = Duct Leakage rate after duct sealing  
 = calculated as above  
 60 = Constant to convert cubic feet per minute to cubic feet per hour  
 CDH = Cooling Degree Hours<sup>278</sup>.

Dependent on location:

Location	Cooling Degree Hours (75°F set point)
Akron	3,986
Cincinnati	7,711
Cleveland	5,817
Columbus	4,367
Dayton	5,934
Toledo	4,401
Youngtown	3,689

DUA = Discretionary Use Adjustment to account for the fact that people do not always operate their air conditioning system when the outside temperature is greater than 75°F  
 = 0.75<sup>279</sup>  
 0.018 = The volumetric heat capacity of air (Btu/ft<sup>3</sup>°F)  
 η<sub>Cool</sub> = Efficiency of Air Conditioning equipment  
 = Actual

For example, duct sealing in a house in Akron with SEER 11 central air conditioning and the following blower door test results:

Before: CFM50<sub>Whole House</sub> = 4800 CFM50  
 CFM50<sub>Envelope Only</sub> = 4500 CFM50  
 House to duct pressure of 45 Pascals. = 1.29 SCF (Energy Conservatory look up table)

After: CFM50<sub>Whole House</sub> = 4700 CFM50  
 CFM50<sub>Envelope Only</sub> = 4500 CFM50  
 House to duct pressure of 43 Pascals = 1.39 SCF (Energy Conservatory look up table)

Duct Leakage:  
 CFM50<sub>DL before</sub> = (4800 – 4500) \* 1.29  
 = 387 CFM

CFM50<sub>DL after</sub> = (4700 – 4500) \* 1.39  
 = 278 CFM

Energy Savings:  
 $\Delta \text{kWh} = ((387 - 278) * 60 * 3986 * 0.75 * 0.018) / 1000 / 11$   
 = 32 kWh

<sup>278</sup> Derived by summing the delta between the average outdoor temperature and the base set point of 75 degrees (above which cooling is assumed to be used) each hour of the year. Hourly temperature data obtained from TMY3 data (<http://rredc.nrel.gov/solar/>)

<sup>279</sup> Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p31

## Methodology 2: Evaluation of Distribution Efficiency

Determine Distribution Efficiency by evaluating duct system before and after duct sealing using Building Performance Institute “Distribution Efficiency Look-Up Table”

$$\Delta \text{kWh}_{\text{cooling}} = ((\text{DE}_{\text{after}} - \text{DE}_{\text{before}}) / \text{DE}_{\text{after}}) * \text{FLH}_{\text{cool}} * \text{BtuH} * (1/\text{SEER})/1000$$

Where:

$\text{DE}_{\text{after}}$  = Distribution Efficiency after duct sealing

$\text{DE}_{\text{before}}$  = Distribution Efficiency before duct sealing

$\text{FLH}_{\text{cool}}$  = Full load cooling hours  
Dependent on location as below:

Location	Run Hours <sup>280</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

$\text{BtuH}$  = Size of equipment in BtuH (note 1 ton = 12,000BtuH)  
= Actual

$\text{SEER}$  = SEER Efficiency of AC unit  
= Actual

For example, duct sealing in a house in Akron, with 3-ton SEER 11 central air conditioning and the following duct evaluation results:

$\text{DE}_{\text{after}}$  = 0.92

$\text{DE}_{\text{before}}$  = 0.85

Energy Savings:

$$\begin{aligned}\Delta \text{kWh} &= ((0.92 - 0.85)/0.92) * 476 * 36000 * (1/11) / 1000 \\ &= 118.5 \text{ kWh}\end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / \text{FLH}_{\text{cool}} * \text{CF}$$

Where:

$\text{FLH}_{\text{cool}}$  = Full load cooling hours

Dependent on location as below:

<sup>280</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; “National Energy Savings Potential From Addressing Residential HVAC Installation Problems”). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research.”

Location	Run Hours <sup>281</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>282</sup>

## Space Heating Savings Calculation

### Methodology 1: Modified Blower Door Subtraction

$$\Delta \text{MMBTU} = ((\text{CFM50}_{\text{DL before}} - \text{CFM50}_{\text{DL after}}) * 60 * 24 * \text{HDD} * 0.018) / 1,000,000 / \eta_{\text{Heat}}$$

Where:

CFM50<sub>DL before</sub> = Duct Leakage rate before duct sealing  
= calculated as above

CFM50<sub>DL after</sub> = Duct Leakage rate after duct sealing  
= calculated as above

HDD = Heating Degree Days (60° base temperature) for location<sup>283</sup>

Location	Heating Degree Days (60°F base temperature)
Akron	4,848
Cincinnati	3,853
Cleveland	4,626
Columbus	4,100
Dayton	4,430
Toledo	4,482
Youngstown	4,887

$\eta_{\text{Heat}}$  = Average Net Heating System Efficiency (Equipment Efficiency \*  
Distribution Efficiency)<sup>284</sup>  
= actual recorded

<sup>281</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."

<sup>282</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

<sup>283</sup> The 10 year average annual heating degree day value, using a balance point for heating equipment use of 60 degrees was calculated for each location based on data obtained from <http://www.engr.udayton.edu/weather/>. The 60 degree balance point is used based on a PRISM evaluation of approximately 600,000 Ohio residential single family customers.

<sup>284</sup> The System Efficiency can be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

If there are more than one heating systems, the weighted (by consumption) average efficiency should be used. If the heating system or distribution is being upgraded within a package of measures together with the insulation upgrade, the new average heating system efficiency should be used.



**Note for homes with electric heat (resistance or heat pump), follow the MMBTU formula above and convert to kWh by multiplying by 293.1. For heat pumps the equipment efficiency used in the above algorithm should be the Coefficient Of Performance or COP (i.e. divide HSPF by 3.412, e.g. HSPF 7.7 is COP of 2.26).**

For example, duct sealing in a house in Akron with a 80% AFUE natural gas furnace and the following blower door test results:

Before:  $CFM50_{Whole\ House} = 4800\ CFM50$   
 $CFM50_{Envelope\ Only} = 4500\ CFM50$   
House to duct pressure of 45 Pascals = 1.29 SCF (Energy Conservatory look up table)

After:  $CFM50_{Whole\ House} = 4700\ CFM50$   
 $CFM50_{Envelope\ Only} = 4500\ CFM50$   
House to duct pressure of 43 Pascals = 1.39 SCF (Energy Conservatory look up table)

Duct Leakage:  
 $CFM50_{DL\ before} = (4800 - 4500) * 1.29$   
 $= 387\ CFM$   
 $CFM50_{DL\ after} = (4700 - 4500) * 1.39$   
 $= 278\ CFM$

Energy Savings:  
 $\Delta MMBTU = ((387 - 278) * 60 * 24 * 4848 * 0.018) / 1,000,000 / 0.80$   
 $= 17.1\ MMBtu$

### ***Methodology 2: Evaluation of Distribution Efficiency***

$$\Delta MMBTU_{fossil\ fuel} = ((DE_{after} - DE_{before}) / DE_{after}) * MMBTU_{heat}$$

Where:

$DE_{after}$  = Distribution Efficiency after duct sealing

$DE_{before}$  = Distribution Efficiency before duct sealing

$MMBTU_{heat}$  = Heating energy consumption

$$= 71.2\ MMBtu^{285}$$

For example, duct sealing in a fossil fuel heated house in Akron with the following duct evaluation results:

$DE_{after} = 0.92$

$DE_{before} = 0.85$

Energy Savings:  
 $\Delta MMBTU = ((0.92 - 0.85) / 0.92) * 71.2$   
 $= 5.42\ MMBtu$

<sup>285</sup> Assumption based on review of Ohio State average home heating output (based on gas utility data)

$$\Delta \text{MMBTUelectric} = ((\text{DE}_{\text{after}} - \text{DE}_{\text{before}}) / \text{DE}_{\text{after}})) * \text{FLHheat} * \text{BtuH} * (1/\text{COP} * 3.413)/1000$$

Where:

FLHheat = Full load heating hours  
Dependent on location as below:

Location	Run Hours <sup>286</sup>
Akron	1576
Cincinnati	1394
Cleveland	1567
Columbus	1272
Dayton	1438
Mansfield	1391
Toledo	1628

BtuH = Size of equipment in BtuH (note 1 ton = 12,000BtuH)

= Actual

COP = Coefficient of Performance of electric heating system<sup>287</sup>

For example, duct sealing in a heat pump (HSPF 6.8) heated house in Akron with the following duct evaluation results:

DE<sub>after</sub> = 0.92

DE<sub>before</sub> = 0.85

Energy Savings:

$$\begin{aligned} \Delta \text{kWh} &= ((0.92 - 0.85)/0.92) * 1576 * 36000 * (1/6.8)/1000 \\ &= 635 \text{ kWh} \end{aligned}$$

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>286</sup> Heating EFLH extracted from simulations conducted for Duke Energy, OH Joint Utility TRM, October 2009; “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”

<sup>287</sup> Note that the HSPF of a heat pump is equal to the COP \* 3.413.

## ENERGY STAR Windows (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the purchase of ENERGY STAR Windows meeting the minimum requirement for the North region<sup>288</sup> (u factor  $\leq 0.30$ ), at natural time of replacement or new construction. This does not relate to a window retrofit program.

### Definition of Efficient Equipment

To qualify for this measure, the new window must meet ENERGY STAR criteria for the North region (u factor  $\leq 0.30$ ). There is no minimum criterion for Solar Heat Gain Coefficient (SHGC) for windows in the North region, so an assumed typical SHGC of 0.30 for a u-0.30 window is used (this is also the minimum criteria for the federal tax credit).

### Definition of Baseline Equipment

The baseline window is assumed to be a standard double pane window with vinyl sash, (u-0.49, SHGC-0.58).

### Deemed Savings for this Measure

**NOTE: These savings are all per 100 square feet of windows**

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Heating Savings (Electric Resistance)	302	n/a	n/a	n/a
Heating Savings (Heat Pump)	237	n/a	n/a	n/a
Heating Savings (Fossil Fuel)	n/a	n/a	1.84	n/a
Cooling Savings (Central AC)	126	0.063	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 25 years<sup>289</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$150 per 100 square feet of windows<sup>290</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0.5<sup>291</sup>.

<sup>288</sup> Energy Star Qualification Criteria;

[http://www.energystar.gov/ia/partners/prod\\_development/archives/downloads/windows\\_doors/WindowsDoorsSkylightsProgRequirements7Apr09.pdf](http://www.energystar.gov/ia/partners/prod_development/archives/downloads/windows_doors/WindowsDoorsSkylightsProgRequirements7Apr09.pdf)

<sup>289</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>290</sup> Alliance to Save Energy Efficiency Windows Collaborative Report, December 2007

<sup>291</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings<sup>292</sup>

Heating kWh Savings (Electric Resistance) = 302 kWh per 100 square feet window area

Heating kWh Savings (Heat Pump COP 2.0) = 237 kWh per 100 square feet window area

Cooling kWh Savings = %CoolKWSav \* (FLHcool \* BtuH \* (1/SEER))/1000

Where:

%CoolKWSav = Percentage of cooling energy savings per 100 square feet of window  
= 7%<sup>293</sup>

FLHcool = Full load cooling hours  
= 552<sup>294</sup>

BtuH = Size of equipment in BtuH  
= 36,000<sup>295</sup>

SEER = Assumed SEER efficiency of central AC unit  
= 11<sup>296</sup>

Cooling kWh Savings = 0.07 \* (552 \* 36000 \* (1/11))/1000

= 126 kWh per 100 square feet window area

#### Summer Coincident Peak Demand Savings

$\Delta kW_{cooling}$  = %CoolKWSav \* BtuH \* (1/EER)/1000 \* CF

Where:

%CoolKWSav = Percentage of cooling energy savings per 100 square feet of window  
= 3.7%<sup>297</sup>

EER = Assumed EER Efficiency of central AC unit  
= 10.5<sup>298</sup>

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>299</sup>

$\Delta kW_{cooling}$  = 0.037 \* 36000 \* (1/10.5)/1000 \* 0.5

---

<sup>292</sup> Savings for this measure are based on REMRate modeling of a typical home in Columbus, Ohio climate with electric resistance or air source heat pump (COP 2.0), and assuming SEER 11 air conditioning.

<sup>293</sup> REMRate analysis indicated that installing Energy Star windows in a home in Columbus OH would reduce cooling consumption by 7% per 100 square feet of window.

<sup>294</sup> Based on Full Load Hour assumptions for Columbus OH (used as proxy for the State) taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems").

<sup>295</sup> Assumption of typical central AC unit capacity.

<sup>296</sup> VEIC estimate of existing unit efficiency, based on minimum federal standard prior to 2006 of SEER 10, and SEER 13 after 2006.

<sup>297</sup> REMRate analysis indicated that installing Energy Star windows in a home in Columbus OH would reduce cooling design loads by 3.7% per 100 square feet of window.

<sup>298</sup> Converting 11 SEER to 10.5 EER using algorithm  $EER = (SEER * 0.37) + 6.43$  (based on Roberts and Salcido, Architectural Energy Corporation, Feb 2008; "Peak Electric Demand Calculations in the REM/Rate Home Energy Rating Software and REM/Design Home Energy Analysis Software").

<sup>299</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

= 0.063 kW per 100 square feet of windows

### **Fossil Fuel Impact Descriptions and Calculation**

Heating MMBtu Savings (Fossil Fuel) = 2.17 MMBtu per 100 square feet window area<sup>300</sup>

### **Water Impact Descriptions and Calculation**

n/a

### **Deemed O&M Cost Adjustment Calculation**

n/a

### **Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

<sup>300</sup> Savings for this measure are based on REMRate modeling of a typical home in Columbus, Ohio climate with a 72% AFUE natural gas furnace, and assuming SEER 11 air conditioning. 72% AFUE is estimated based on in 2000, 40% of furnaces purchased in Ohio were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process). Assuming typical efficiencies for condensing and non condensing furnace and duct losses, the average heating system efficiency is estimated as follows:

$$(0.4 \times 0.92) + (0.6 \times 0.8) \times (1 - 0.15) = 0.72$$

## Residential Two Speed / Variable Speed Pool Pumps (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the purchase and installation of an efficient two-speed or variable speed residential pool pump motor in place of a standard single speed motor of equivalent horsepower.

### Definition of Efficient Equipment

The high efficiency equipment is a two-speed or variable speed residential pool pump.

### Definition of Baseline Equipment

The baseline efficiency equipment is assumed to be a single speed residential pool pump.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Two Speed	440	1.13	n/a	n/a
Variable Speed	1170	1.73	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The estimated useful life for a variable speed pool pump is 10 years.

### Deemed Measure Cost

The incremental cost is estimated to be \$175 for a two speed motor and \$750 for a variable speed motor<sup>301</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.83<sup>302</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings<sup>303</sup>

$$\Delta \text{kWh} = \text{kWh}_{\text{Base}} - \text{kWh}_{\text{Efficient}}$$

Where:

$\text{kWh}_{\text{Base}}$  = assumed annual kWh consumption for standard single speed pump motor in a cool climate (100 days<sup>304</sup>)  
= 1,380 kWh

---

<sup>301</sup> Based on review of Lockheed Martin pump retail price data, July 2009.

<sup>302</sup> Based on Efficiency Vermont's coincidence factor for pool pumps; in the absence of empirical evaluation data, this was based on market feedback about the typical run pattern for pool pumps showing that most people will run pump during the day, and set timer to turn pump off during the night.

<sup>303</sup> Energy Consumption provided in: Consortium for Energy Efficiency, June 2009; "Pool Pump Exploration Memo"

<sup>304</sup> Assumes pool operation between Memorial Day and Labor Day.

$kWh_{\text{Efficient}}$  = assumed annual kWh consumption for efficient pump motor in a cool climate (100 days)  
 $kWh_{\text{Two Speed}}$  = 940 kWh  
 $kWh_{\text{Variable Speed}}$  = 210 kWh

$\Delta kWh_{\text{Two Speed}}$  = 1380 - 940  
 = 440 kWh

$\Delta kWh_{\text{Variable Speed}}$  = 1380 - 210  
 = 1170 kWh

### Summer Coincident Peak Demand Savings

$$\Delta kW = (kW_{\text{Base}} - kW_{\text{Efficient}}) * CF$$

Where<sup>305</sup>:

$kW_{\text{Base}}$  = Assumed connected load of standard single speed pump motor  
 = 2.3 kW

$kW_{\text{Efficient}}$  = Weighted average connected load of efficient pump motor

$kW_{\text{Two Speed}}$  = 0.94 kWh

$kW_{\text{Variable Speed}}$  = 0.21 kWh

$CF$  = Summer Peak Coincidence Factor for measure  
 = 0.83<sup>306</sup>

$\Delta kW_{\text{Two Speed}}$  = (2.3 - 0.94) \* 0.83  
 = 1.13 kW

$\Delta kW_{\text{Variable Speed}}$  = (2.3 - 0.21) \* 0.83  
 = 1.73 kWh

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

<sup>305</sup> Connected loads calculated by dividing daily consumption by run hours. Data provided in: Consortium for Energy Efficiency, June 2009; "Pool Pump Exploration Memo"

<sup>306</sup> Based on Efficiency Vermont's coincidence factor for pool pumps; in the absence of empirical evaluation data, this was based on market feedback about the typical run pattern for pool pumps showing that most people will run pump during the day, and set timer to turn pump off during the night.

## Residential Premium Efficiency Pool Pump Motor (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the purchase and installation of a residential 1.5HP premium efficiency single speed pool pump motor in place of a standard single speed motor of equivalent horsepower.

### Definition of Efficient Equipment

The high efficiency equipment is a residential 1.5HP premium efficiency single speed pool pump motor.

### Definition of Baseline Equipment

The baseline efficiency equipment is a residential 1.5HP standard single speed motor pool pump motor.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Premium Efficiency Motor	409	0.58	n/a	n/a

### Deemed Lifetime of Efficient Equipment

The estimated useful life for a pump is 10 years.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$50<sup>307</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.83<sup>308</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\begin{aligned} \text{kWh}_{\text{Base}} &= (\text{HP} * \text{LF}_{\text{Base}} * 0.746) / \eta_{\text{Pump}_{\text{Base}}} * \text{Hrs/day}_{\text{Base}} * \text{Days/yr} \\ \text{kWh}_{\text{Eff}} &= (\text{HP} * \text{LF}_{\text{Eff}} * 0.746) / \eta_{\text{Pump}_{\text{Eff}}} * \text{Hrs/day}_{\text{Eff}} * \text{Days/yr} \end{aligned}$$

$$\Delta \text{kWh} = \text{kWh}_{\text{Base}} - \text{kWh}_{\text{Eff}}$$

Where <sup>309</sup>

HP = Horsepower of motors

---

<sup>307</sup> Franklin Energy Services; “FES- M4 – HE Swimming Pool Pumps – Residential”

<sup>308</sup> Based on Efficiency Vermont’s coincidence factor for pool pumps; in the absence of empirical evaluation data, this was based on market feedback about the typical run pattern for pool pumps showing that most people will run pump during the day, and set timer to turn pump off during the night.

<sup>309</sup> All assumptions from First Energy’s Residential Swimming Pool Pumps memo unless otherwise stated.



$$\begin{aligned}
 &= 1.5 \\
 LF_{Base} &= \text{Load factor of baseline motor} \\
 &= 0.66 \\
 LF_{Eff} &= \text{Load factor of efficient motor} \\
 &= 0.65 \\
 \eta_{Pump_{Base}} &= \text{Efficiency of premium efficiency motor} \\
 &= 0.325 \\
 \eta_{Pump_{Eff}} &= \text{Efficiency of premium efficiency motor} \\
 &= 0.455 \\
 \text{Hrs/day} &= \text{Assumed hours of pump operation per day} \\
 &= 6^{310} \\
 \text{Days/yr} &= \text{Assumed number of days pool in use} \\
 &= 100 \text{ days}^{311}
 \end{aligned}$$

$$\begin{aligned}
 kWh_{Base} &= (1.5 * 0.66 * 0.746) / 0.325 * 6 * 100 \\
 &= 1,363 \text{ kWh}
 \end{aligned}$$

$$\begin{aligned}
 kWh_{Efficient} &= (1.5 * 0.65 * 0.746) / 0.455 * 6 * 100 \\
 &= 959 \text{ kWh}
 \end{aligned}$$

$$\begin{aligned}
 \Delta kWh &= 1363 - 959 \\
 &= 404 \text{ kWh}
 \end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\begin{aligned}
 kW_{Base} &= (HP * LF_{Base} * 0.746) / \eta_{Pump_{Base}} \\
 kW_{Eff} &= (HP * LF_{Eff} * 0.746) / \eta_{Pump_{Eff}} \\
 \Delta kW &= (kW_{Base} - kW_{Eff}) * CF
 \end{aligned}$$

Where:

$$\begin{aligned}
 CF &= \text{Summer Peak Coincidence Factor for measure} \\
 &= 0.83^{312} \\
 kW_{Base} &= (1.5 * 0.66 * 0.746) / 0.325 \\
 &= 2.27 \text{ kW} \\
 kW_{Eff} &= (1.5 * 0.65 * 0.746) / 0.455 \\
 &= 1.60 \text{ kW} \\
 \Delta kW &= (2.27 - 1.60) * 0.83 \\
 &= 0.56 \text{ kW}
 \end{aligned}$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

<sup>310</sup> Consortium for Energy Efficiency, June 2009; "Pool Pump Exploration Memo"

<sup>311</sup> Assumes pool operation between Memorial Day and Labor Day.

<sup>312</sup> Based on Efficiency Vermont's coincidence factor for pool pumps; in the absence of empirical evaluation data, this was based on market feedback about the typical run pattern for pool pumps showing that most people will run pump during the day, and set timer to turn pump off during the night.

**Water Impact Descriptions and Calculation**

n/a

**Deemed O&M Cost Adjustment Calculation**

n/a

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Water Heaters (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure describes the purchase and installation of an efficient water heater meeting or exceeding Energy Star criteria<sup>313</sup> for the water heater category.

### Definition of Efficient Equipment

The minimum efficiency Energy Star qualification criteria<sup>314</sup> by category are:

<i>Water Heater Type</i>	<i>Energy Factor</i>
Gas Storage	0.67
Gas Condensing	0.80
Gas Tankless (Whole house)	0.82

### Definition of Baseline Equipment

New 50 gallon conventional gas storage water heater rated at the federal minimum 0.58 EF.

### Deemed Savings for this Measure

$$\text{Savings } \Delta \text{MMBtu} = 180 * (1/EF_{\text{Base}} - 1/EF_{\text{Eff}})$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 13 years<sup>315</sup>

### Deemed Measure Cost

<i>Water Heater Type</i>	<i>Incremental Cost</i> <sup>316</sup>
Gas Storage (0.67EF)	\$400
Gas Storage Condensing (0.80EF)	\$685 <sup>317</sup>
Gas Tankless (Whole house 0.82EF)	\$605 <sup>318</sup>

### Deemed O&M Cost Adjustments

There is no justification at this time for O&M cost adjustments.

### Coincidence Factor

n/a

<sup>313</sup> [http://www.energystar.gov/index.cfm?c=water\\_heat.pr\\_crit\\_water\\_heaters](http://www.energystar.gov/index.cfm?c=water_heat.pr_crit_water_heaters)

<sup>314</sup> Though the current standard is 0.62 As of Sept 1 2010 the gas storage specification will change on 9/1/2010, requiring a higher energy factor. The more stringent criteria will save a typical family nearly 15% over a standard model.

<sup>315</sup> For all water heaters, life expectancy will depend on local variables such as water chemistry and homeowner maintenance. There is currently insufficient data to determine tankless water heaters lifetimes. Preliminary data show lifetimes up to 20 years are possible. This value attempts to capture the weighted average lifetime of this category in aggregate and is supported by the findings [http://www.aceee.org/consumerguide/WH\\_LCC\\_1107.pdf](http://www.aceee.org/consumerguide/WH_LCC_1107.pdf)

<sup>316</sup> We started with the EPA Energy Star Water Heater criteria final analysis for cost data and because of the age of the report we looked and compared the cost and ranges to current market prices. We found that the cited cost (or the middle of the high and low values provided) were on target for the Gas Storage categories, but that the average of the high and low ranges was too high for the tankless category. For this reason the low end of the cited range was used for the tankless category.

<sup>317</sup> This value comes from the middle of the range (\$1985) of installed costs from the above source minus the \$865 installed cost of the baseline. These units are only recently on the market and a review of available pricing support this number.

<sup>318</sup> Uses the same \$865 cost baseline, but market review indicated that the incremental cost should be calculated from the low end of the price cited in the source (\$1470)

---

## REFERENCE SECTION

---

### Calculation of Savings

Savings are determined using Energy Factor assumptions, applying the proportion of consumption used for water heating.

### Energy Savings

$$\Delta \text{MMBtu} = \text{BtuHW}_{\text{USAGE}} * (1 - \text{EF}_{\text{Base}} / \text{EF}_{\text{Eff}})$$

Where:

$$\begin{aligned} \text{BtuHW}_{\text{USAGE}} &= \text{typical household hot water consumption in therms per year} \\ &= 180^{319} \end{aligned}$$

$$\begin{aligned} \text{EF}_{\text{Base}} &= \text{Energy Factor for the baseline equipment} \\ &= 0.58 \end{aligned}$$

$$\begin{aligned} \text{EF}_{\text{Eff}} &= \text{Energy Factor for the efficient equipment} \\ &= \text{actual installed} \end{aligned}$$

For example for a new tankless unit rated at AFUE 0.82 the savings would be calculated as follows:

$$\begin{aligned} \Delta \text{MMBtu} &= 180 * (0.82 - 0.58) / 0.58 \\ &= 54 \end{aligned}$$

### Summer Coincident Peak Demand Savings

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>319</sup> Average Daily household hot water usage from 2001 Residential Energy Consumption Survey.

## Programmable Thermostats (Time of Sale, Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Programmable Thermostats can save energy through the advanced scheduling of time-of-day and/or day-of-week setbacks to control heating and cooling setpoints. Typical usage reduces the heating setpoint during times of the day when occupants are usually not at home (work hours), keeping the home at a cooler temperature in the winter reduces heat losses relative to a higher temperature.

### Definition of Efficient Equipment

Programmable Thermostat

### Definition of Baseline Equipment

Standard, non-programmable thermostat for central heating system (baseboard electric is excluded from this characterization).

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings(MMBTU) per unit	Average Annual Water savings per unit
Residential	n/a <sup>320</sup>	n/a	4.8	n/a

### Deemed Lifetime of Efficient Equipment

The lifetime of this measure is assumed to be 15 years in accordance with the EPA's determination of the lifetime of the thermostats.

### Deemed Measure Cost

The incremental cost for the purchase of a programmable thermostat shows significant variation, but is typically on the order of \$35 based upon current retail market prices. Measures directly installed through retrofit programs should use the actual material, and labor costs.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

<sup>320</sup> The referenced study only evaluated heating savings and did not address savings during the cooling season. We do not believe it is appropriate to assume a similar pattern of savings from setting your thermostat down during the heating season and up during the cooling season. A literature review could not find any appropriate defensible source of cooling savings from programmable thermostats

---

## REFERENCE SECTION

---

### Calculation of Savings

Savings from programmable thermostats can be difficult to estimate from analytical methods due to the significant behavioral interactions in both the initial programming and the year-over year operation. Studies that evaluate the savings impacts of programmable thermostats vary, but there is considerable and credible regard for the findings of a 2007 study<sup>321</sup> that incorporated large sample sizes of survey response and billing analyses.

### Energy Savings

n/a

### Summer Coincident Peak Demand Savings

n/a

### Fossil Fuel Impact Descriptions and Calculation

$$\begin{aligned}\text{Average Savings } \Delta\text{MMBtu} &= (\text{Savings } \%) \times (\text{Annual Home Heating Load } ^{322}) \\ &= 6.8\% \times (71.2 \text{ MMBtu}) \\ &= 4.8 \text{ MMBtu}\end{aligned}$$

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>321</sup> 2007, RLW Analytics, “Validating the Impact of Programmable Thermostats”

<sup>322</sup> The value used here, 712 therms, is based on personal communication with Michael Blasnik, consultant to Columbia gas in May 2010, and derived from a billing analysis of approximately 600,000 Columbia Gas residential single family customers in Ohio.

## Condensing Furnaces-Residential (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

New ENERGY STAR-qualified high efficiency gas-fired condensing furnace for residential space heating. High efficiency features may include improved heat exchangers and modulating multi-stage burners.

### Definition of Efficient Equipment

Furnace AFUE rating  $\geq 90\%$  and less than 225,000 BTU/h input energy.

### Definition of Baseline Equipment

Federal baseline for furnaces is 78%. Review of GAMA shipment data indicates a more suitable market baseline is 80% AFUE. The baseline unit is non-condensing. Early retirement programs the

### Deemed Savings for this Measure

$$\Delta \text{MMBtu} = 712 * \text{BtuH} * (1 - \text{AFUE}_{\text{BASE}} / \text{AFUE}_{\text{EFF}}) * 10^{-6}$$

### Deemed Lifetime of Efficient Equipment

The lifetime of this measure is estimated to be 15 years.<sup>323</sup>

### Deemed Measure Cost

The incremental measure cost, based on material cost alone<sup>324</sup>, as labor is comparable to baseline, shall be related to AFUE of the unit<sup>325</sup>:

AFUE, %	Incremental Cost
90	\$310
92	\$477
94	\$657
96	\$851

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

## REFERENCE SECTION

---

### Calculation of Savings

Savings are calculated using the difference in required gas based upon the efficiency of the furnace and the average annual heating load for Ohio Residences. No change in the distribution system efficiency including fan motor is assumed.

### Electrical Energy Savings

n/a

### Summer Coincident Peak Demand Savings

n/a

---

<sup>323</sup> <http://www.cee1.org/resrc/facts/gs-ht-fx.pdf>

<sup>324</sup> CA DEER Database Res-HVAC

<sup>325</sup> [http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/fb\\_fr\\_tsd/appendix\\_e.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/fb_fr_tsd/appendix_e.pdf)

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta\text{MMBtu} = \text{FLH}_{\text{HEAT}} * \text{BtuH} * (1 - \text{AFUE}_{\text{BASE}}/\text{AFUE}_{\text{EFF}}) * 10^{-6}$$

$$\begin{aligned}\text{FLH}_{\text{HEAT}} &= \text{Equivalent Full Load Heating Hours} \\ &= 712^{326}\end{aligned}$$

$$\begin{aligned}\text{BtuH} &= \text{Size of equipment in Btuh} \\ &= \text{Actual installed}\end{aligned}$$

$$\begin{aligned}\text{AFUE}_{\text{BASE}} &= \text{Annual Fuel Utilization Efficiency \% for the baseline equipment} \\ &= 0.80\end{aligned}$$

$$\begin{aligned}\text{AFUE}_{\text{EFF}} &= \text{Annual Fuel Utilization Efficiency \% for the efficient equipment} \\ &= \text{Actual installed}\end{aligned}$$

For example: savings for a furnace rated at 96 AFUE

$$\begin{aligned}\Delta\text{MMBtu} &= 712 * 100,000 * (1 - 0.80/0.96) * 10^{-6} \\ &= 11.9\end{aligned}$$

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

<sup>326</sup> Calculated based upon typical annual home heating load of 712 therms (based on personal communication with Michael Blasnik. Full load hours were determined assuming an average unit capacity of 100,000 BtuH. Actual program data should be compared against this assumed 100,000Btuh value and FLH may be adjusted as a result.



## Boilers (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

New energy star-qualified high efficiency gas-fired boiler for residential space heating

### Definition of Efficient Equipment

Boiler AFUE rating  $\geq 85\%$  less than 300,000 BTU/h energy input.

### Definition of Baseline Equipment

Federal baseline AFUE for boilers is 80 %

### Deemed Savings for this Measure

$$\Delta \text{MMBtu} = 712 * \text{BtuH} * (1 - \text{AFUE}_{\text{BASE}} / \text{AFUE}_{\text{EFF}}) * 10^{-6}$$

### Deemed Lifetime of Efficient Equipment

The lifetime of this measure is 18 years<sup>327</sup>.

### Deemed Measure Cost

The incremental measure cost, based on material and installation costs are a function of the AFUE of the unit.<sup>328</sup>

AFUE	Incremental Cost
85-90	\$ 216
$\geq 91$	\$ 422

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

## REFERENCE SECTION

---

### Calculation of Savings

Savings are calculated using the difference in required gas based upon the efficiency of the boiler and the average annual heating load for Ohio Residences. No changes in the distribution system efficiency including blower motor are assumed.

### Electrical Energy Savings

n/a

### Summer Coincident Peak Demand Savings

n/a

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = \text{FLH}_{\text{HEAT}} * \text{BtuH} * (1 - \text{AFUE}_{\text{BASE}} / \text{AFUE}_{\text{EFF}}) * 10^{-6}$$

$$\begin{aligned} \text{FLH}_{\text{HEAT}} &= \text{Equivalent Full Load Heating Hours} \\ &= 712^{329} \end{aligned}$$

<sup>327</sup>[http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/fb\\_fr\\_tsd/appendix\\_e.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/fb_fr_tsd/appendix_e.pdf)

<sup>328</sup> [http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/fb\\_tsd\\_0907.html](http://www1.eere.energy.gov/buildings/appliance_standards/residential/fb_tsd_0907.html) values for 85-90



## Water Heater Wrap (Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to a Tank Wrap or insulation “blanket” that is wrapped around the outside of a hot water tank to reduce stand-by losses. This measure applies only for homes that have an electric water heater that is not already well insulated. Generally this can be determined based upon the appearance of the tank<sup>330</sup>

### Definition of Efficient Equipment

The measure is a properly installed insulating tank wrap to reduce standby energy losses from the tank to the surrounding ambient area.

### Definition of Baseline Equipment

The baseline is a standard electric domestic hot water tank without an additional tank wrap. Gas storage water heaters are excluded due to the limitations of retrofit wrapping and the associated impacts on reduced savings and safety.

### Deemed Savings for this Measure

	Average Annual KWH Savings per unit	Average Summer Coincident Peak kW Savings per unit	Average Annual Fossil Fuel heating fuel savings (MMBTU) per unit	Average Annual Water savings per unit
Residential	79	0.009	0	0

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 5 years<sup>331</sup>.

### Deemed Measure Cost

The incremental cost for this measure will be the actual material cost of procuring and labor cost of installing the tank wrap.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

This measure assumes a flat loadshape and as such the coincidence factor is 1.

---

## REFERENCE SECTION

---

### Calculation of Savings

This calculation relies upon the findings that a poorly insulated electric resistance water heater with a pre-wrap EF of 0.86 has a new and more effective EF of 0.88 after properly wrapped with supplemental insulation.<sup>332</sup>

### Energy Savings

$$\Delta \text{kWH} = \text{kWH}_{\text{base}} * ((\text{EF}_{\text{new}} - \text{EF}_{\text{base}}) / \text{EF}_{\text{new}})$$

Where:

---

<sup>330</sup> Generally this can be determined by the appearance of the tank and whether it is insulated by foam (newer, rigid, and more effective) or fiberglass (older, gives to gently pressure, and not as effective)

<sup>331</sup> This estimate assumes the tank wrap is installed on an existing unit with 5 years remaining life. On average when retrofitting an existing tank, the tanks would be roughly halfway through their 13-15 year life, but because the qualifying baseline tanks with fiberglass rather than foam insulation are older (we could not find any that are currently for sale) then we anticipate actual remaining life to be so if they have a measure life it would be lower by a few years.

<sup>332</sup> Impacts of waste heat on heating and cooling savings are not included in this characterization.

$kWHB_{ase}$  = Average kWh consumption of electric domestic hot water tank  
 = 3460<sup>333</sup>  
 $EF_{new}$  = Assumed efficiency of electric tank with tank wrap installed  
 = 0.88<sup>334</sup>  
 $EF_{base}$  = Assumed efficiency of electric tank without tank wrap installed  
 = 0.86<sup>Error! Bookmark not defined.</sup>

So:  
 $\Delta kWH = 3460 * ((0.88 - 0.86) / 0.88)$   
 $= 79 \text{ kWh}$

### Summer Coincident Peak Demand Savings

$\Delta kW = \Delta kWh / 8760$

Where:

$\Delta kWH$  = kWh savings from tank wrap installation  
 8760 = Number of hours in a year (since savings are assumed to be constant over year).

$\Delta kW = 79 / 8760$   
 $= 0.0090 \text{ kW}$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

<sup>333</sup> Assumption taken from; Residential Water Heaters Technical Support Document for the January 17, 2001, Final Rule Table 9.3.9, p9-34, [http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/09.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/09.pdf)  
 Consistent with FEMP study; Field Testing of Pre-Production Prototype Residential Heat Pump Water Heaters [http://www1.eere.energy.gov/femp/pdfs/tir\\_heatpump.pdf](http://www1.eere.energy.gov/femp/pdfs/tir_heatpump.pdf)

<sup>334</sup> The Oak Ridge study predicted that wrapping a 40 gal water heater would increase Energy Factor of a 0.86 electric DHW tank by 0.02 (to 0.88);

"Meeting the Challenge: The Prospect of Achieving 30 percent Energy Savings Through the Weatherization Assistance Program" by the Oak Ridge National Laboratory - May 2002. [http://www.cee1.org/eval/db\\_pdf/309.pdf](http://www.cee1.org/eval/db_pdf/309.pdf)

## Solar Water Heater with Electric Backup (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a new solar water heater system with electric backup meeting SRCC OG-300 performance standards presented below. This measure will relate to the installation of a new system in an existing home.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a SRCC OG-300 certified Solar Water Heater with a solar energy factor (SEF) meeting the ENERGY STAR specification.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a standard electric water heater meeting or exceeding the minimum energy factor set in the 2004 federal conservation standard for water heaters.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (1/\text{EF} - 1/\text{SEF}) * Q_{\text{DEL}}$$

$$\text{Annual kW Savings} = (1/\text{EF} * Q_{\text{DEL}}) / \text{Hours} * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 20 years<sup>335</sup>.

### Deemed Measure Cost

The cost for this measure is \$9,506<sup>336</sup>.

### Deemed O&M Cost Adjustments

\$344<sup>337</sup>

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 20%<sup>338</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = (1/\text{EF} - 1/\text{SEF}) * Q_{\text{DEL}}$$

---

<sup>335</sup> Based on ENERGY STAR Residential Water Heaters, Final Criteria Analysis: [http://www.energystar.gov/ia/partners/prod\\_development/new\\_specs/downloads/water\\_heaters/WaterHeaterDraftCriteriaAnalysis.pdf](http://www.energystar.gov/ia/partners/prod_development/new_specs/downloads/water_heaters/WaterHeaterDraftCriteriaAnalysis.pdf)

<sup>336</sup> The average cost of a fully installed solar thermal system was \$9,506, and ranged between \$6,825 and \$11,850. Source: <http://www.greenenergyohio.org/page.cfm?pageID=2712>

<sup>337</sup> NPV of future costs including: glycol, pump, and tank replacement. Source: Appendix 2 APS-Incentives for Photovoltaic Distributed Generation (VEIC 2010). Because this retrofit measure replaces an existing water tank with some years remaining, this NPV conservatively overstates the O&M costs to the degree that existing tank would have required replacement a few years earlier.

<sup>338</sup> Calculated from Itron eShapes, which is 8760 hourly data by end use for Upstate New York.

Where:

EF	= Minimum energy factor for residential electric water heater <sup>339</sup> = $0.97 - (0.00132 \times \text{Rated Storage Volume in gallons})$ = 0.904 (50 gallon residential tank)
SEF	= Minimum system performance for solar water heaters <sup>340</sup> = Actual installed
Q <sub>DEL</sub>	= Energy delivered to the hot water load <sup>341</sup> = 64.3 gal/day * 77 degF * 8.3 BTU/lb-degF = 41,094 BTU/day = 4,395 kWh/year <sup>342</sup>

For example, a solar water heater system with SEF rating of 1.8:

$$\begin{aligned}\Delta \text{kWh} &= (1/0.9 - 1/1.8) * 4,395 \text{ kWh/year} \\ &= 2461 \text{ kWh}\end{aligned}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (1/\text{EF} * Q_{\text{DEL}}) / \text{Hours} * \text{CF}$$

Where:

Hours	= Full load hours of water heater = 2533 <sup>343</sup>
CF	= Summer Peak Coincidence Factor for measure = 0.203 <sup>344</sup>
$\Delta \text{kW}$	= $(1/0.9 * 4,395) / 2533 * 0.203$ = 0.39 kW <sup>345</sup>

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

---

<sup>339</sup> 2004 Federal Energy Conservation Standard for water heaters

<sup>340</sup> Based on Solar Rating and Certification Company (SRCC) annual system performance rating for solar water heaters (OG-300 7/28/2010). ENERGY STAR specifications require a solar fraction greater than 0.5, which equates to a minimum solar energy factor (SEF) of 1.8.

<sup>341</sup> Based on DOE and Solar Rating and Certification Company (SRCC) test procedure assumptions of 64.3 gallons per day draw, 135 deg F hot water and 58 deg F cold water supply temperatures.

<sup>342</sup> This baseline level of consumption is higher than the average baseline electrical usage for residential hot water heating (3,460kWh) but less than the consumption level indicated by following the DOE water heating standard test procedure formula:  $(12.03/\text{EF}) \times 365 = 4,857\text{kWh}$ . These systems are generally installed in homes with higher usage and correlates with household size and income, and so the calculated value seems appropriate in this light.

<sup>343</sup> Full load hours assumption based on Efficiency Vermont loadshape, calculated from Itron eShapes.

<sup>344</sup> Calculated from Itron eShapes, which is 8760 hourly data by end use for Upstate New York.

<sup>345</sup> The resultant demand reduction from the Itron eShapes is consistent with the results of the ADM whitepaper for FirstEnergy's solar water heater program in Pennsylvania, in which the demand reduction assumes that the system is designed to meet 100% of a home's hot water need during the summer months and is the product of two factors, the annual baseline energy usage of an electric water heater and the fraction of energy usage during the coincident peak times of 3-6PM during the months of June thru August. The fractional usage was calculated from PJM Deemed Savings Estimates for Legacy Air Conditioning and Water Heating Direct Load Control Programs in PJM Region.  
<http://www.pjm.com/~media/committees-groups/working-groups/lrwg/20070301/20070301-pjm-deemed-savings-report.ashx>

### **Deemed O&M Cost Adjustment Calculation**

n/a

### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Residential New Construction

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This Residential New Construction (RNC) protocol describes the methodology by which program administrators shall calculate energy and demand savings for new homes built in Ohio. Accredited Home Energy Rating System (HERS) software that complies with the Mortgage Industry National Home Energy Rating Systems Accreditation Standards developed by the Residential Energy Services Network (RESNET) shall be used to calculate energy and demand savings. Likewise, Home Energy Raters (Raters) will follow the technical guidelines provided in the Mortgage Industry National Home Energy Rating Standards when conducting a Rating.

Energy and demand savings shall be estimated per home for heating, cooling, hot water, lighting, ceiling fans, and appliances, including refrigerators and dishwashers. To avoid double-counting of savings, products included in RNC savings should not also be included for savings under another program. However, savings for efficient products installed in the home other than those listed above and that are not claimed through the RNC program may be captured through another program.

### Definition of Efficient and Baseline Cases

The following assumptions underlie this methodology:

1. Program implementers are using REM/Rate™ to conduct HERS ratings on each efficient new home built (the Rated Home).
2. Program administrators will employ the User Defined Reference Home (UDRH) feature provided in REM/Rate™ to estimate savings.

The UDRH feature allows energy consumption to be compared for a Rated Home and a User Defined Reference Home (UDRH). The UDRH is an exact replica of the Rated home in size, structure, and climate zone, but the energy characteristics are defined by local code or building practices. Until such a time as a formal study characterizing baseline building practices is completed for Ohio, the UDRH shall be defined by the Residential Energy Efficiency section of the prevailing Ohio Building Code. As of January, 2009 the Ohio Building Code is based on the 2006 International Energy Conservation Code (IECC). Section 0 provides the energy related requirements of the 2006 IECC that shall be used to create the UDRH.

While the assumption is that the HERS software employed by program implementers will be REM/Rate™, any RESNET approved software program may be used. For recommendations on estimating savings using a rating tool other than REM/Rate™, see section titled Other Software (below).

### Definitions and Acronyms

**HERS** - Home Energy Rating System

**HERS Provider** - A firm or organization that develops, manages, and operates a home energy rating system and is currently accredited by RESNET

**Home Energy Rater or Rater** – The person trained and certified by a HERS Provider to perform the functions of inspecting and analyzing a home to evaluate the minimum rated features and prepare an energy efficiency rating

**IECC** - International Energy Conservation Code

**Rated Home** - The specific home being evaluated using the rating procedures contained in the National Home Energy Rating Technical Guidelines



**Rating Tool** - A procedure for calculating a home's energy efficiency rating, annual energy consumption, and annual energy costs and which is listed in the "National Registry of Accredited Rating Software Programs" as posted on the RESNET web site

**Reference Home** - A hypothetical home configured in accordance with the specifications set forth in the National Home Energy Rating Technical Guidelines for the purpose of calculating rating scores

**REM/Rate™** - RESNET approved residential energy analysis, code compliance and rating software supported by Architectural Energy Corporation, [www.archenergy.com](http://www.archenergy.com)

**RNC** - Residential New Construction

**RESNET** - Residential Energy Services Network, the national standards making body for building energy efficiency rating system, [www.resnet.us](http://www.resnet.us)

**UDRH** - *User Defined Reference Home* is a feature of REM/Rate™ that enables the HERS provider to create other reference buildings based on local construction practice, local code etc. that can be compared to the rated home

### Calculation of Savings

#### Energy Savings

Energy savings, including fossil fuel savings, for heating, cooling, hot water, lighting, and appliances noted above will be a direct output of REM/Rate™ (or other RESNET approved) energy modeling software. Energy savings shall be calculated on a per home basis by the following calculation:

$$\text{Energy savings} = \text{UDRH energy consumption} - \text{Rated Home energy consumption}$$

The UDRH shall be defined by the 2006 IECC, with some supplemental clarifications, and is provided in Table 3 in the section titled User Defined Reference Home (UDRH) Specifications below.

For RNC projects that participate through a RESNET-approved sampling protocol, energy savings shall be determined based on the savings from the model home, linearly adjusted based on floor area to all other homes included in that sample set. Chapter 6 of the RESNET Mortgage Industry National Home Energy Rating Standards provides technical guidelines on the sampling protocol.

#### Demand Savings

Electric demand savings for heating, cooling, hot water, lighting, and appliances are a direct output of REM/Rate™ (or other RESNET approved) energy modeling software. System peak electric demand savings shall be calculated on a per home basis by the following calculation:

$$\begin{aligned} \text{Coincident system peak electric demand savings} = \\ (\text{UDRH electric demand} - \text{Rated Home electric demand}) * CF \end{aligned}$$

Where RNC programs enforce right-sizing of mechanical equipment, the following calculations shall be used:

$$\begin{aligned} \text{Coincident system peak electric demand savings} = \\ ((\text{UDRH electric demand} * OF_{UDRH}) - (\text{Rated Home electric demand} * OF_r)) * CF \end{aligned}$$

Where:

CF = Coincidence factor which equates the installed HVAC system's demand to its demand at time of system peak

OF<sub>UDRH</sub> = Over-sizing factor for the HVAC unit in the UDRH home

OF<sub>r</sub> = Over-sizing factor for the HVAC unit in the Rated Home

Rated Home = Rated Home electric demand output from REM/Rate™

UDRH = User Defined Reference Home electric demand output from REM/Rate™

Table 1 provides a summary of the input values and their data sources.

**Table 1. Peak Demand Variable Definitions**

Variable	Type	Value	Sources
OF <sub>UDRH</sub>	Fixed	1.60	PSE&G 1997 Residential New Construction baseline study. 2004 Long Island Power Authority Residential New Construction Technical Baseline Study values of 155% to 172% over-sizing confirms this value.
OF <sub>r</sub>	Fixed	1.15	Program guideline for rated home
CF	Fixed	0.50	Based on Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research”, p32

### Lighting and Appliances

REM/Rate™ offers two input modes for Lights and Appliances: simplified and detailed. The simplified input mode, or “Lights & Appliances – HERS”, is the default mode in REM/Rate™ and is used to calculate a HERS Index. The detailed input mode, or “Lights & Appliances – AUDIT”, is used to capture additional lighting and appliance data. Since only the simplified input mode is used when calculating a HERS Index, the simplified mode shall be used when calculating energy and demand savings for RNC.

Energy and demand savings shall be estimated per home for heating, cooling, hot water, lighting, ceiling fans, and appliances, including refrigerators and dishwashers. To avoid double-counting of savings, products included in RNC savings should not also be included for savings under another program. However, savings for efficient products installed in the home other than those listed above and that are not claimed through the RNC program may be captured through another program.

### User Defined Reference Home (UDRH) Feature

The UDRH feature in REM/Rate™ provides a home-by-home comparison of energy consumption against a user-defined reference home. REM/Rate™ modifies the thermal and energy performance features of the Rated Home to the specifications provided by the UDRH, leaving the building size, structure and climate zone the same as the Rated Home. The energy consumption of the Rated Home can then be compared to the energy consumption of the same home had it been built to different specifications.

The UDRH shall be defined by the Residential Energy Efficiency section of the prevailing Ohio Building Code. As of January, 2009 the Ohio Building Code is based on the 2006 International Energy Conservation Code (IECC). Therefore, energy and demand savings in Ohio will be based on the difference in estimated energy consumption of the program home, and that same home had it been built to 2006 (or any subsequently-updated) IECC specifications.

For REM/Rate™, the UDRH specifications are contained in an ASCII script file that follows a specific syntax. Details on creating a UDRH file can be found in the REM/Rate™ Help module. Inputs for a UDRH file based on 2006 IECC (with supplemental clarifications) can be found in Table 3 in the section titled User Defined Reference Home (UDRH) Specifications below.

A UDRH report may be run singly for each home, or in batch mode for multiple homes. Data from the UDRH report may also be exported from REM/Rate™ to an Access database for additional data manipulation and to

calculate savings. Additional information on using the UDRH batch export feature can be found in the REM/Rate™ Help module.

#### Ohio Climate Zones

Climate zones from Figure 1 or Table 2 shall be used in determining the applicable energy requirements for the UDRH. Details of the UDRH are listed in Table 3.

Figure 1. Ohio Climate Zones Map



Table 2. Ohio Climate Zones by County

<b>OHIO</b>
<b>Zone 5</b>
<b>except Zone 4</b>
Adams
Brown
Clermont
Gallia
Hamilton
Lawrence
Pike
Scioto
Washington

### User Defined Reference Home (UDRH) Specifications

Table 3 below provides inputs for a UDRH based on the 2006 IECC, with some supplemental clarifications.

**Table 3. 2006 IECC UDRH Specifications**

Data Point	Value		Unit	Source	Comment
Building Thermal Envelope					
	Zone 4	Zone 5			
Fenestration	0.40	0.35	U-factor	2006 IECC Table 402.1.3	
Skylight	0.60	0.60	U-factor	2006 IECC Table 402.1.3	
Glazed Fenestration SHGC	0.40	0.40	SHGC	2006 IECC Table 404.5.2(1)	No prescriptive requirement.
Ceiling	.030	.030	U-factor	2006 IECC Table 402.1.3	
Wood Frame Wall	.082	.060	U-factor	2006 IECC Table 402.1.3	
Rim and Band Joists	.082	.060	U-factor		Code requirement for wood frame wall.
Mass Wall	.141	.082	U-factor	2006 IECC Table 402.1.3	
Frame Floor	.047	.033	U-factor	2006 IECC Table 402.1.3	
Basement Wall	.059	.059	U-factor	2006 IECC Table 402.1.3	
Slab, unheated	10, 2	10, 2	R-value, ft	2006 IECC Table 402.1.1	“ft” = feet from top of slab edge below grade.
Slab, heated	15, 2	15, 2	R-value, ft	2006 IECC Table 402.1.1	“ft” = feet from top of slab edge below grade.
Crawl Space Wall	.065	.065	U-factor	2006 IECC Table 402.1.3	
Air Infiltration Rate	.00036	.00036	SLA	2006 IECC Table 404.5.2(1)	Approximately 7 to 8 ACH50.
Mechanical Systems					
Furnace	80		AFUE	Federal Standard	Standard is 78 AFUE, 80 AFUE is adopted based on typical minimum availability and practice.
Boiler	80		AFUE	Federal Standard	
Heat Pump, Heating	7.7		HSPF	Federal Standard	All heat pumps shall be characterized as an ASHP.
Central Air Conditioning	13		SEER	Federal Standard	
Heat Pump, Cooling	13		SEER	Federal Standard	
Water Heating, gas	0.58		EF	Federal Standard	Federal requirements vary based on tank size. The UDRH feature does not allow adjustments to efficiency values based on tank size, therefore the UDRH reference efficiency shall be based on minimum federal efficiency requirements for a 50 gal tank.
Water Heating, oil	0.50		EF	Federal Standard	See Water Heating, gas.
Water heating, electric	0.90		EF	Federal Standard	See Water Heating, gas.

Data Point	Value	Unit	Source	Comment
Integrated Space/Water Heating, heating	80	AFUE	Federal Standard, Boiler	Combination space and water heating units shall reference the minimum Federal standard boiler efficiency for the heating portion of the unit
Integrated Space/Water Heating, water	.58 (gas) .50 (oil) .90 (electric)	EF	Federal Standard, Water heating	Combination space and water heating units shall reference the minimum Federal standard water heating efficiency for the water heating portion of the unit.
Thermostat, type	Manual		2006 IECC Table 404.5.2(1)	
Thermostat, cooling set point	78	Degree F	2006 IECC Table 404.5.2(1)	
Thermostat, heating set point	68	Degree F	2006 IECC Table 404.5.2(1)	
Duct Insulation	8	R-value	2006 IECC 403.2.1	
Duct Insulation, in floor truss	6	R-Value	2006 IECC 403.2.1	
Duct Leakage	0.80	DSE	2006 IECC Table 404.5.2(1)	
Mechanical Ventilation	n/a			Ventilation is not required by code. The UDRH shall not reference ventilation. This way the program home will see no energy savings or energy penalty from ventilation.
<b>Lights &amp; Appliances</b>				
Efficient Lighting	10	Percent	RESNET Standard	
Refrigerator	585	kWh/yr	VEIC	Based on the weighted average of NAECA baseline kWh/yr installed in Vermont, 5000 hr/yr.
Dishwasher	0.46	EF	RESNET Standard	
Ceiling Fan	None		RESNET Standard	

### Active Solar & Photovoltaics (PV)

Solar systems installed for water and/or space heating and photovoltaic systems installed to meet electricity demand are not addressed in the 2006 IECC. However, they need to be addressed in the UDRH. If the RNC program **allows** for savings to be claimed from the use of active solar or PV systems, these systems should be eliminated from the UDRH so that their savings shows up when compared to the rated home with the solar system installed.

If the RNC program **does not allow** savings to be claimed from the use of active solar or PV systems, these systems should not be included in the UDRH. When a system is not referenced in the UDRH, that system will be the same in both the Rated and the Reference home. This way, energy consumption for the Rated Home and the UDRH will be estimated assuming both configurations have the solar or PV system installed, so no savings will be reported. The specific syntax for this is provided in the REM/Rate™ UDRH Syntax Report.

### Other Software

If the program implementer is using a RESNET approved software program other than REM/Rate™, where possible a module similar to the UDRH feature in REM/Rate™ shall be used to estimate energy and demand savings. If no such feature exists, the following steps shall be taken to estimate energy and demand savings:

1. Model the home in a RESNET approved software program and capture energy consumption and electric demand.
2. Model the same home a second time using the 2006 UDRH specifications provided in Table 3 and capture energy consumption and electric demand.
3. The difference between energy consumption in the Rated Home and the Rated Home modeled to 2006 IECC specifications shall be the energy savings for that home.
4. The difference between electric demand in the Rated Home and the Rated Home modeled to 2006 IECC specifications shall be the electric demand savings for that home.

Savings from lighting and appliances shall be estimated using the alternate RESNET approved software. Any appliances not captured by the alternate software program shall be captured by a program other than RNC.

### Deemed Lifetime of Efficient Building

25 yr (for heating, cooling, and shell savings measures)<sup>346</sup>

### Deemed Measure Cost

Incremental costs can be calculated for different tiers of efficient homes from the following table.

**Table 4. Incremental Costs from Baseline to Specific HERS Levels<sup>347</sup>**

	<b>ENERGY STAR Minimum (HERS 85)*</b>	<b>HERS 70</b>	<b>HERS 65</b>
Single Family Home with Gas Furnace total and per square foot cost	\$2,869 \$1.18	\$7,136 \$2.94	\$9,286 \$3.83
Single Family Home with Gas Boiler total and per square foot cost	\$2,646 \$1.09	\$6,570 \$2.71	\$8,160 \$3.36
Single Family Home with Oil Boiler total and per square foot cost	\$2,371 \$0.98	\$6,325 \$2.61	\$7,914 \$3.26
Average for all single family total and per square foot cost	\$2,599 \$1.07	\$6,677 \$2.75	\$8,453 \$3.49

\*Calculated as an average of the packages provided for each housing type/HVAC system combination

### Deemed O&M Cost Adjustments

There are no operation and maintenance cost adjustments for this measure

### Fossil Fuel Impact Descriptions and Calculation

Energy savings, including fossil fuel savings, for heating, cooling, hot water, lighting, and appliances noted above will be a direct output of REM/Rate™ (or other RESNET approved) energy modeling software as described above

### Water Impact Descriptions and Calculation

n/a

<sup>346</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007; <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>347</sup> Evaluation of the Massachusetts New Homes with Energy Star® Program, Incremental Cost Analysis Nexus Market Research, Inc. and Dorothy Conant, Nov. 2007

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

# Whole-House Residential Retrofit

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

## Description

Whole house retrofit programs, like Home Performance with ENERGY STAR and Low Income Weatherization initiatives, may include a variety of treatments, including building shell and HVAC upgrades and the direct installation of energy efficient products. This protocol describes how building energy modeling of each individual home treated through a program may be used to estimate savings for the building shell (e.g., air-sealing and insulation) and HVAC (e.g., duct sealing and central heating and/or cooling system replacements) measures installed in those homes. Savings from other measures such as efficient lighting, appliances, or water heating should be estimated using deemed values or deemed calculations provided for such measures elsewhere in this TRM.

The alternative to using building energy modeling to develop energy savings for the shell and HVAC measures would be to use the deemed measure savings calculations found elsewhere in this TRM for the installed measures (air-sealing, insulation, duct sealing, etc.). Deemed savings calculations are simpler to administer and implement but may be less precise because they are based on some assumed average characteristics of homes (e.g., average heating system efficiencies) and do not capture interactive effects between some measures.

## Definition of Efficient Case

House as treated by installed building shell and HVAC measures. Installed measures outside of these categories should follow the appropriate measure-specific characterizations.

## Definition of Baseline Case

The baseline is the house as it is before it is retrofitted with installed measures. The only exception to this rule is that the assumed baseline efficiency of a heating system or central air conditioner that is being replaced should be consistent with the current minimum federal efficiency standards for such equipment, unless it is clear that the equipment would not have been replaced at that particular point in time were it not for the influence of the program (i.e., the program must document that old equipment would otherwise not have been replaced in order to claim a baseline efficiency that is lower than current minimum federal efficiency standards).

## Calculation of Savings

The requirements for a model-based approach to savings claims are in part are delineated through adherence with at least one of the following national standards for whole-house savings calculations:

- RESNET<sup>348</sup> approved rating software
- Software energy simulation performance exceeding the requirements of National Renewable Energy Laboratory's Home Energy Rating System BESTEST<sup>349</sup>
- US DOE Weatherization Assistance Program approval<sup>350</sup>

Proper savings estimates from modeling software also require that the R-value of uninsulated walls or ceilings (i.e., baseline conditions) should be modeled as being no less than R-5. In addition, software tools must be calibrated against actual consumption data for each treated home or from a sample sized for 90% confidence interval and 10% margin of error statistical precision. These requirements address concerns that modeling software can over-estimates savings, particularly cooling savings.

The software tools must provide outputs that separately account for heating and cooling energy savings so

---

<sup>348</sup> <http://resnet.us>

<sup>349</sup> <http://www.nrel.gov/docs/legosti/fy96/7332b.pdf>

<sup>350</sup> <http://www.waptec.org>



that demand and fuel-related economic savings may be properly addressed.

### Summer Coincident Peak Demand Savings

Cooling only:

$$\Delta kW = \Delta kWh_{COOL} / FLH_{COOL} * CF$$

where:

$FLH_{COOL}$  = Full load cooling hours, dependent on location as below:

Location	Run Hours <sup>351</sup>
Akron	476
Cincinnati	664
Cleveland	426
Columbus	552
Dayton	631
Mansfield	474
Toledo	433
Youngstown	369

CF = Summer Peak Coincidence Factor for measure  
= 0.5<sup>352</sup>

For example if the cooling savings output from the software tool for a home in Toledo is 350kWh then:

$$\begin{aligned}\Delta kW &= \Delta kWh / FLH_{cool} * CF \\ &= 350 / 433 * 0.5 \\ &= 0.404 \text{ kW}\end{aligned}$$

### Deemed Lifetime of Efficient Case

The average savings-weighted lifetime for this measure is assumed to be 20 years, based upon an anticipated mixture of shell and HVAC measures that range from 15 to 25 years.<sup>353</sup>

### Deemed Measure Cost

The total of the actual costs in procuring and installing the equipment, materials, and/or services

### Deemed O&M Cost Adjustments

n/a

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>351</sup> Based on Full Load Hour assumptions taken from the ENERGY STAR calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 33% due to assumption that the average air conditioning is oversized by 50% (Neme, Proctor, Nadal, 1999; "National Energy Savings Potential From Addressing Residential HVAC Installation Problems"). Note this approach results in full load hour estimates within 10% of measured estimates from the Energy Center of Wisconsin, May 2008 study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research."

<sup>352</sup> Based on Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p32

<sup>353</sup> A review of actual measures installed through the program should be conducted to assess whether on a savings basis the weighted average should be adjusted in accordance with a measure distribution that favors longer (insulation) or shorter (air sealing) lifetimes.

### III. Commercial & Industrial Market Sector

#### Electric Chiller (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

##### Description

This measure relates to the installation of a new electric chiller meeting the efficiency standards presented below. This measure could relate to the replacement of an existing unit at the end of its useful life, or the installation of a new system in an existing building (i.e. time of sale). Only single-chiller applications should be assessed with this methodology. The characterization is not suited for multiple chillers projects or chillers equipped with variable speed drives (VSDs). Multiple chiller projects and chillers equipped with VSDs should be evaluated on a custom basis.

##### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to exceed the efficiency requirements of the 2006 International Energy Conservation Code, Table 503.2.3(7).

##### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to meet the efficiency requirements of the 2006 International Energy Conservation Code, Table 503.2.3(7).

##### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{TONS} * ((3.516/\text{IPLV}_{\text{base}}) - (3.516/\text{IPLV}_{\text{ee}})) * \text{EFLH}$$

$$\text{Summer Coincident Peak kW Savings} = \text{TONS} * ((3.516/\text{COP}_{\text{base}}) - (3.516/\text{COP}_{\text{ee}})) * \text{CF}$$

##### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 20 years<sup>354</sup>.

##### Deemed Measure Cost

The incremental capital cost for this measure is provided below.

Equipment Type	Size Category	Incremental Cost (\$/ton) <sup>355</sup>
Air cooled, electrically operated	All capacities	\$127/ton <sup>356</sup>
Water cooled, electrically operated, positive displacement (reciprocating)	All capacities	\$22/ton
Water cooled, electrically operated, positive displacement (rotary screw and scroll)	< 150 tons	\$128/ton
	>= 150 tons and < 300 tons	\$70/ton
	>= 300 tons	\$48/ton

<sup>354</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Effective/Remaining Useful Life Values", California Public Utilities Commission, December 16, 2008

([http://deeresources.com/deer0911planning/downloads/EUL\\_Summary\\_10-1-08.xls](http://deeresources.com/deer0911planning/downloads/EUL_Summary_10-1-08.xls))

<sup>355</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Cost Values and Summary Documentation", California Public Utilities Commission, December 16, 2008

([http://deeresources.com/deer0911planning/downloads/DEER2008\\_Costs\\_ValuesAndDocumentation\\_080530Rev1.zip](http://deeresources.com/deer0911planning/downloads/DEER2008_Costs_ValuesAndDocumentation_080530Rev1.zip))

<sup>356</sup> Calculated as the simple average of screw and reciprocating air-cooled chiller incremental costs from the reference noted in Footnote 355.

Equipment Type	Size Category	Incremental Cost (\$/ton) <sup>355</sup>
Water cooled, electrically operated, centrifugal	All capacities	\$177/ton <sup>357</sup>

#### Deemed O&M Cost Adjustments

n/a

#### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 74%<sup>358</sup>.

### REFERENCE SECTION

#### Calculation of Savings

##### Energy Savings

$$\Delta \text{kWH} = \text{TONS} * ((3.516/\text{IPLV}_{\text{base}}) - (3.516/\text{IPLV}_{\text{ee}})) * \text{EFLH}$$

Where:

TONS	= chiller nominal cooling capacity in tons (note: 1 ton = 12,000 Btu/h)
	= Actual installed
3.516	= conversion factor to express Integrated Part Load Value (IPLV) in terms of kW per ton
IPLV <sub>base</sub>	= efficiency of baseline equipment expressed as Integrated Part Load Value. Dependent on chiller type. See Table A in the Reference Tables section.
IPLV <sub>ee</sub> <sup>359</sup>	= efficiency of high efficiency equipment expressed as Integrated Part Load Value
	= Actual installed
EFLH	= equivalent full load hours
	Dependent on location as below:

System Type	EFLH by Location <sup>360</sup>						
	Akron	Columbus	Cincinnati	Cleveland	Dayton	Mansfield	Toledo
CV reheat, no economizer	2,866	2,633	2,940	2,762	3,063	2,960	2,743
CV reheat, economizer	793	941	955	932	976	921	859
VAV reheat, economizer	788	946	974	768	896	669	848

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{TONS} * ((3.516/\text{COP}_{\text{base}}) - (3.516/\text{COP}_{\text{ee}})) * \text{CF}$$

Where:

COP <sub>base</sub>	= efficiency of baseline equipment expressed as COP
---------------------	---

<sup>357</sup> Calculated as the simple average of non-VSD water-cooled centrifugal chiller incremental costs from the reference noted in Footnote 355.

<sup>358</sup> Summer Peak Coincidence Factor has been preserved from the “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009. This is likely a conservative estimate, but is recommended for further study.

<sup>359</sup> Integrated Part Load Value is simply a seasonal average efficiency rating calculated in accordance with ARI Standard 550/590. It may be calculated using any measure of efficiency (EER, kW/ton, COP), but for consistency with IECC 2006, it is expressed in terms of COP here.

<sup>360</sup> Cooling EFLHs have been preserved from the “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009. These appear reasonable, but are recommended for further study.

Dependent on chiller type. See Table A in the Reference Tables section.

CO<sub>P</sub>ee = efficiency of high efficiency equipment expressed as COP  
 = Actual installed  
 CF = Summer Peak Coincidence Factor for measure  
 = 74%

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Reference Tables

**Table A: Baseline Efficiency Values by Chiller Type and Capacity**<sup>361</sup>

Equipment Type	Size Category	Baseline Efficiency (IPLV <sub>base</sub> , COP <sub>base</sub> )
Air cooled, with condenser, electrically operated	< 150 tons	2.80 IPLV, 2.80 COP
	>= 150 tons	2.50 IPLV, 2.50 COP
Air cooled, without condenser, electrically operated	All capacities	3.10 IPLV, 3.10 COP
Water cooled, electrically operated, positive displacement (reciprocating)	All capacities	4.65 IPLV, 4.20 COP
Water cooled, electrically operated, positive displacement (rotary screw and scroll)	< 150 tons	4.50 IPLV, 4.45 COP
	>= 150 tons and < 300 tons	4.95 IPLV, 4.90 COP
	>= 300 tons	5.60 IPLV, 5.50 COP
Water cooled, electrically operated, centrifugal	< 150 tons	5.00 IPLV, 5.00 COP
	>= 150 tons and < 300 tons	5.55 IPLV, 5.55 COP
	>= 300 tons	6.10 IPLV, 6.10 COP

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: TBD

<sup>361</sup> 2006 International Energy Conservation Code, International Code Council, Inc., January 2006.

## C&I Lighting Controls (Time of Sale, Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a new lighting control on a new or existing lighting system. Lighting control types covered by this measure include wall- or ceiling-mounted occupancy sensors, fixture mounted occupancy sensors, remote-mounted daylight dimming sensors, fixture mounted daylight dimming sensors, central lighting controls (timeclocks), and switching controls for multi-level lighting. This measure could relate to the installation of a new system in an existing building or a new construction application (i.e., time of sale). Lighting controls required by state energy codes are not eligible.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a lighting system controlled by one of the lighting controls systems listed above.

### Definition of Baseline Equipment

The baseline equipment is assumed to be an uncontrolled lighting systems operated by a manual switch.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{kW}_{\text{controlled}} * \text{HOURS} * (1 + \text{IF}_{\text{kWh}}) * \text{ESF}$$

$$\text{Summer Coincident Peak kW Savings} = \text{kW}_{\text{controlled}} * (1 + \text{IF}_{\text{kW}}) * \text{ESF} * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life for all lighting controls is assumed to be 8 years<sup>362</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is provided below.

Lighting Control Type	Incremental Cost
Wall-Mounted Occupancy Sensors	\$42 <sup>363</sup>
Ceiling-Mounted Occupancy Sensors	\$66 <sup>364</sup>
Fixture Mounted Occupancy Sensors	\$125 <sup>365</sup>
Remote-Mounted Daylight Dimming Sensors	\$65 <sup>366</sup>
Fixture Mounted Daylight Dimming Sensors	\$50 <sup>367</sup>
Switching Controls for Multi-Level Lighting	\$274 <sup>368</sup>
Central Lighting Controls (Timeclocks)	\$103 <sup>369</sup>

<sup>362</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Effective/Remaining Useful Life Values", California Public Utilities Commission, December 16, 2008 ([http://deeresources.com/deer0911planning/downloads/EUL\\_Summary\\_10-1-08.xls](http://deeresources.com/deer0911planning/downloads/EUL_Summary_10-1-08.xls))

<sup>363</sup> Goldberg et al, State of Wisconsin Public Service Commission of Wisconsin, Focus on Energy Evaluation, Business Programs: Incremental Cost Study, KEMA, October 28, 2009.

<sup>364</sup> Ibid.

<sup>365</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010.

<sup>366</sup> Ibid.

<sup>367</sup> Ibid.

<sup>368</sup> Goldberg et al, State of Wisconsin Public Service Commission of Wisconsin, Focus on Energy Evaluation, Business Programs: Incremental Cost Study, KEMA, October 28, 2009.

<sup>369</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Cost Values and Summary Documentation", California Public Utilities Commission, December 16, 2008

## Deemed O&M Cost Adjustments

n/a

## Coincidence Factor

The summer peak coincidence factor for this measure is dependent on technology type as below:

Lighting Control Type	CF
Wall- or Ceiling-Mounted Occupancy Sensors	0.15 <sup>370</sup>
Fixture-Mounted Occupancy Sensors	0.15 <sup>371</sup>
Remote-Mounted Daylight Dimming Sensors	0.90 <sup>372</sup>
Fixture-Mounted Daylight Dimming Sensors	0.90 <sup>373</sup>
Switching Controls for Multi-Level Lighting	0.77 <sup>374</sup>
Central Lighting Controls (Timeclocks)	0.00 <sup>375</sup>

---

---

## REFERENCE SECTION

---

---

## Calculation of Savings

### Energy Savings

$$\Delta \text{kWh} = \text{kW}_{\text{controlled}} * \text{HOURS} * (1 + \text{IF}_{\text{kWh}}) * \text{ESF}$$

Where:

$\text{kW}_{\text{controlled}}$  = total lighting load connected to the control in kilowatts  
= Actual installed

$\text{HOURS}$  = total operating hours of the controlled lighting before the lighting controls are installed. If actual site-specific value is unknown, assume default values dependent on building type as below:

Building Type	HOURS <sup>376</sup>
Food Sales	5,544
Food Service	4,482
Health Care	3,677
Hotel/Motel	3,356
Office	3,526
Public Assembly	2,729
Public Services (non-food)	3,425
Retail	4,226
Warehouse	3,464
School	2,302

---

([http://deeresources.com/deer0911planning/downloads/DEER2008\\_Costs\\_ValuesAndDocumentation\\_080530Rev1.zip](http://deeresources.com/deer0911planning/downloads/DEER2008_Costs_ValuesAndDocumentation_080530Rev1.zip))

<sup>370</sup> Coincidence Factor Study Residential and Commercial Industrial Lighting Measures, RLW Analytics, Spring 2007.

<sup>371</sup> Ibid.

<sup>372</sup> Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010.

<sup>373</sup> Ibid.

<sup>374</sup> Ibid.

<sup>375</sup> Conservative assumption based on professional judgment considering that timeclocks are unlikely to produce significant savings during the summer on-peak period.

<sup>376</sup> Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, unless otherwise noted.

Building Type	HOURS <sup>376</sup>
College	3,900
Industrial – 1 Shift	2,857 <sup>377</sup>
Industrial – 2 Shift	4,730 <sup>378</sup>
Industrial – 3 Shift	6,631 <sup>379</sup>
Exterior	3,833 <sup>380</sup>
Other	3,672

IFkWh = lighting-HVAC Interaction Factor for energy; this factor represents the reduced electric space cooling requirements due to the reduction on waste heat rejected by the efficient lighting.

ESF = Energy Savings Factor; percent operating hours reduced due to the installation of the occupancy lighting controls or timeclocks, or percent wattage reduction multiplied by the hours of dimming for dimming lighting controls and multilevel switching.  
Dependent on control type as below:

Lighting Control Type	ESF <sup>382</sup>
Wall- or Ceiling-Mounted Occupancy Sensors	30%
Fixture-Mounted Occupancy Sensors	30%
Remote-Mounted Daylight Dimming Sensors	30%
Fixture-Mounted Daylight Dimming Sensors	30%
Switching Controls for Multi-Level Lighting	30%
Central Lighting Controls (Timeclocks)	10%

#### Summer Coincident Peak Demand Savings

$$\Delta kW = kW_{\text{connected}} * (1 + IFkW) * ESF * CF$$

Where:

IFkW = lighting-HVAC Interaction Factor for demand; this factor represents the reduced electric space cooling requirements due to the reduction on waste heat rejected by the efficient lighting.  
= 0.200 (interior fixtures), 0.000 (exterior fixtures)<sup>383</sup>

<sup>377</sup> UI and CL&P Program Savings Documentation for 2010 Program Year, United Illuminating Company, September 2009.

<sup>378</sup> Ibid.

<sup>379</sup> Ibid.

<sup>380</sup> Exterior lighting 3,833 hours per year assumes 10.5 hours per day; typical average for photocell control.

<sup>381</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

<sup>382</sup> Energy Savings Factors determined from a review of Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010, New York Standard Approach for Estimating Energy Savings from Energy Efficiency Measures in Commercial and Industrial Programs, TecMarket Works, September 1, 2009, Goldberg et al, State of Wisconsin Public Service Commission of Wisconsin, Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010.

<sup>383</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio

CF = Summer Peak Coincidence Factor for measure  
Dependent on control type as presented in the introductory “Coincidence Factor” section.

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = \Delta \text{kWh} * \text{IF}_{\text{MMBtu}}$$

Where:

$\text{IF}_{\text{MMBtu}}$  = lighting-HVAC Interaction Factor for gas heating impacts; this factor represents the increased gas space heating requirements due to the reduction of waste heat rejected by the efficient lighting.  
= -0.0028 (interior fixtures), 0.0000 (exterior fixtures)<sup>384</sup>

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

cities: Cincinnati, Cleveland, Columbus and Dayton. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

<sup>384</sup> Ibid.



## Lighting Systems (Non-Controls) (Time of Sale, New Construction)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of new lighting equipment with efficiency that exceeds that of equipment that would have been installed following standard market practices. This characterization includes compact fluorescent lamps (CFLs) and fixtures, linear fluorescent lamps and fixtures, linear fluorescent fixtures replacing high-intensity discharge (HID) fixtures in high-bay applications, and high-intensity discharge (HID) fixtures. This measure could relate to the replacement of an existing unit at the end of its useful life or the installation of a new unit in a new or existing facility.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment must have higher efficiency than the existing equipment and meet program specific equipment criteria.

### Definition of Baseline Equipment

The assumed baseline equipment varies by technology type.

### Compact Fluorescent Lamps

#### Deemed Calculation for Compact Fluorescent Lamps

This measure relates to the installation of a new ENERGY STAR certified compact fluorescent screw-in lamp (CFL) (for those equipment types for which an ENERGY STAR category exists). This measure could relate to the replacing of an existing unit at the end of its useful life, or the installation of a new unit in a new or existing building (i.e. time of sale). This measure applies to the installation of a screw-in CFL replacing a standard general service incandescent lamp.

$$\text{Annual kWh Savings}^{385} = (\text{WATTSee} * 2.79) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTSee} * 2.79) * \text{CF} * (1 + \text{WHFd}) / 1000$$

Note: The multiplier should be adjusted according to the table below to account for the change in baseline stemming from the Energy Independence and Security Act of 2007 discussed below:

CFL Wattage	Delta Watts Multiplier <sup>386</sup>			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	2.79	2.79	2.79	1.72
16-20	2.79	2.79	1.68	1.68
21W+	2.79	1.73	1.73	1.73

#### Baseline Adjustment for Compact Fluorescent Lamps

<sup>385</sup> Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010. Source document cites several evaluations indicating that the overall average existing incandescent lamp wattage is 75.7W and the overall average replacement wattage is 20.0W for CFLs ≤ 32W. For the purposes of this characterization, it is assumed that the baseline and efficient wattages are directly proportional. These assumptions have been simplified as follows:  $(\text{WATTSee} - \text{WATTBase}) = [(75.7/20.0) * \text{WATTSee}] - \text{WATTSee} = \text{WATTSee} * 2.79$ .

<sup>386</sup> Calculated by finding the new delta watts after incandescent bulb wattage reduced (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

Federal legislation stemming from the Energy Independence and Security Act of 2007 will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase out of standard incandescent bulbs<sup>387</sup>. In 2012 100W incandescents will no longer be manufactured, followed by restrictions on 75W in 2013 and 60W in 2014. The baseline for this measure will therefore become bulbs (improved incandescent or halogen) that meet the new standard.

To account for these new standards, the first year annual savings for this measure must be reduced for 100W equivalent bulbs (21W+ CFLs) in 2012, for 75W equivalent bulbs (16-20W CFLs) in 2013 and for 60 and 40W equivalent bulbs (15W or less CFLs) in 2014. To account for this adjustment the delta watt multiplier is adjusted as shown above. In addition, since during the lifetime of a CFL, the baseline incandescent bulb will be replaced multiple times, the annual savings claim must be reduced within the life of the measure. For example, for 100W equivalent bulbs (21W+ CFLs) installed in 2010, the full savings (as calculated above in the Algorithm) should be claimed for the first two years, but a reduced annual savings claimed for the remainder of the measure life.

The appropriate adjustments as a percentage of the base year savings for each CFL range are provided below<sup>388</sup>:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	62%
16-20	100%	100%	60%	60%
21W+	100%	62%	62%	62%

#### Deemed O&M Cost Adjustment Calculation for Compact Fluorescent Lamps

In order to account for the shift in baseline due to the Federal Legislation discussed above, the leveled baseline replacement cost over the lifetime of the CFL is calculated (see [CFL baseline savings shift.xls](#)). The key assumptions used in this calculation are documented below:

	Standard Incandescent	Efficient Incandescent
Replacement Cost	\$0.50	\$2.00
Component Life (years) (based on lamp life / assumed annual run hours)	0.27 <sup>389</sup>	0.81 <sup>390</sup>

The calculated net present value of the baseline replacement costs for CFL type and installation year are presented below:

CFL wattage	NPV of baseline Replacement Costs				
	2010	2011	2012	2013	2014 on
21W+	\$6.34	\$6.91	\$7.50	\$7.50	\$7.50
16-20W	\$5.80	\$6.34	\$6.91	\$7.50	\$7.50

<sup>387</sup> <http://www.gpo.gov/fdsys/pkg/BILLS-110hr6enr/pdf/BILLS-110hr6enr.pdf>

<sup>388</sup> Calculated by finding the ratio of delta watt savings before and after the legislation change (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

<sup>389</sup> Assumes rated life of incandescent bulb of approximately 1000 hours.

<sup>390</sup> VEIC best estimate of future technology.

CFL wattage	NPV of baseline Replacement Costs				
	2010	2011	2012	2013	2014 on
15W and less	\$5.69	\$5.80	\$6.34	\$6.91	\$7.50

### **Compact Fluorescent Fixtures**

#### **Deemed Calculation for Compact Fluorescent Fixtures**

This measure relates to the installation of a new ENERGY STAR certified compact fluorescent lamp (CFL) fixture (for those equipment types for which an ENERGY STAR category exists). This measure could relate to the replacing of an existing unit at the end of its useful life, typically during a major renovation, or the installation of a new system in a new or existing building (i.e. time of sale). This measure applies to the installation of a pin-based CFL fixture (including modular lamp and ballast) replacing a standard general service incandescent lamp.

$$\text{Annual kWh Savings}^{391} = (\text{WATTSee} * 2.79) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTSee} * 2.79) * \text{CF} * (1 + \text{WHFd}) / 1000$$

Note: The multiplier should be adjusted according to the table below to account for the change in baseline stemming from the Energy Independence and Security Act of 2007 discussed below:

CFL Wattage	Delta Watts Multiplier <sup>392</sup>			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	2.79	2.79	2.79	1.72
16-20	2.79	2.79	1.68	1.68
21W+	2.79	1.73	1.73	1.73

#### **Baseline Adjustment for Compact Fluorescent Fixtures**

Federal legislation stemming from the Energy Independence and Security Act of 2007 will require all general-purpose light bulbs between 40 and 100W to be approximately 30% more energy efficient than current incandescent bulbs, in essence beginning the phase out of standard incandescent bulbs<sup>393</sup>. In 2012 100W incandescents will no longer be manufactured, followed by restrictions on 75W in 2013 and 60W in 2014. The baseline for this measure will therefore become bulbs (improved incandescent or halogen) that meet the new standard.

To account for these new standards, the first year annual savings for 100W equivalent bulbs (21W+ CFLs) in 2012, for 75W equivalent bulbs (16-20W CFLs) in 2013 and for 60 and 40W equivalent bulbs (15W or less CFLs) in 2014. To account for this adjustment the delta watt multiplier is adjusted as shown above. In addition, since during the lifetime of a CFL, the baseline incandescent bulb will be replaced multiple times, the annual savings claim must be reduced within the life of the measure. For example, for 100W equivalent bulbs (21W+ CFLs) installed in 2010, the full savings (as calculated above in the Algorithm)

<sup>391</sup> Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010. Source document cites several evaluations indicating that the overall average existing incandescent lamp wattage is 75.7W and the overall average replacement wattage is 20.0W for CFLs <= 32W. For the purposes of this characterization, it is assumed that the baseline and efficient wattages are directly proportional. These assumptions have been simplified as follows: (WATTsbase – WATTSee) = [(75.7/20.0)\* WATTSee] – WATTSee = WATTSee \* 2.79.

<sup>392</sup> Calculated by finding the new delta watts after incandescent bulb wattage reduced (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

<sup>393</sup> <http://www.gpo.gov/fdsys/pkg/BILLS-110hr6enr/pdf/BILLS-110hr6enr.pdf>

should be claimed for the first two years, but a reduced annual savings claimed for the remainder of the measure life. .

The appropriate adjustments as a percentage of the base year savings for each CFL range are provided below<sup>394</sup>:

CFL Wattage	Savings as Percentage of Base Year Savings			
	2009 - 2011	2012	2013	2014 and Beyond
15 or less	100%	100%	100%	62%
16-20	100%	100%	60%	60%
21W+	100%	62%	62%	62%

#### **Deemed O&M Cost Adjustment Calculation for Compact Fluorescent Fixtures** Conservatively not included

#### **High Bay Fluorescent Fixtures**

##### **Deemed Calculation for High Bay Fluorescent Fixtures**

The assumed baseline for installation of a high bay fluorescent fixture is a metal halide system. The Energy Independence and Security Act of 2007 (EISA) requires that as of January 1, 2009, metal halide fixtures designed for use with lamps  $\geq 150$  W and  $\leq 500$  W must use “probe start” ballasts with ballast efficiency  $\geq 94\%$  or “pulse start” ballasts with ballast efficiency  $\geq 88$ . It is therefore likely that new metal halide fixtures will utilize “pulse start” technology. Therefore, the assumed baseline system is a magnetic ballast “pulse start” metal halide system.

$$\text{Annual kWh Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{CF} * (1 + \text{WHFd}) / 1000$$

See

<sup>394</sup> Calculated by finding the ratio of delta watt savings before and after the legislation change (from 100W to 72W in 2012, 75W to 53W in 2013 and 60W to 43W in 2014).

Table 4 for WATTsbase and WATTsee values.

#### **Deemed O&M Cost Adjustment Calculation for High Bay Fluorescent Fixtures**

O&M cost adjustments were developed assuming a typical baseline system and two typical efficient equipment scenarios. For T5HO High Bay fixtures replacing pulse start metal halide fixtures, the levelized annual baseline replacement cost assumption is calculated as \$5.87. For T8VHO high bay fixtures replacing pulse start metal halide fixtures, the levelized annual baseline replacement cost assumption is calculated as -\$1.69. The assumptions used to calculate these adjustments are detailed below.

Baseline 320W Metal-Halide Lamp Cost:	\$25.00
Baseline 320W Lamp Life:	15,000 hrs
Baseline Lamp Labor Cost:	\$5.00 (15 min @ \$20 per hour labor)
Baseline 320W Ballast Cost:	\$60.00
Baseline Ballast Life:	40,000
Baseline Ballast Labor Cost:	\$22.50 (30 min @ \$45 per hour labor)
T5 High-Bay Lamp Cost:	\$5 per lamp (assumes 4 lamps fixture)
T5 High-Bay Lamp Life:	20,000 hrs
T5 High-Bay Lamp Labor Cost:	\$6.67 (20 min @ \$20 per hour labor)
T5 High-Bay Ballast Cost:	\$51.00
T5 High-Bay Ballast Life:	70,000 hrs
T5 High-Bay Ballast Labor Cost:	\$22.50 (30 min @ \$45 per hour labor)
T8 High-Bay Lamp Cost:	\$10 per lamp (assumes 6 lamp fixture)
T8 High-Bay Lamp Life:	18,000 hrs
T8 High-Bay Lamp Labor Cost:	\$13.33 (40 min @ \$20 per hour labor)
T8 High-Bay Ballast Cost:	\$100.00 (2 ballasts)
T8 High-Bay Ballast Life:	70,000 hrs
T8 High-Bay Ballast Labor Cost:	\$45 (60 min @ \$45 per hour labor)

## **High Efficiency Linear Fluorescent Fixtures**

### **Deemed Calculation for High Efficiency Fluorescent Fixtures**

The assumed baseline for installation of a fluorescent fixture varies by the efficient system installed. High Performance and Reduced Wattage T8s must comply with the requirements as published by the Consortium for Energy Efficiency<sup>395</sup>.

$$\text{Annual kWh Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{CF} * (1 + \text{WHFd}) / 1000$$

See Table 5 for WATTS<sub>base</sub> and WATT<sub>See</sub> values.

### **Baseline Adjustment**

The U.S. Department of Energy issued on June 26, 2009 a final rule, amending the energy conservation standards for

<sup>397</sup> equipment types, baseline lamps will become unavailable and participants will be required to upgrade both lamps and ballasts to High Performance T8s, thus negating any savings. Assuming a typical lamp has a lifetime of 18,000 hours and is operated 3,730 hours per year, new lamps installed shortly before the impending federal standards take effect will need to be replaced in mid-2017, indicating that savings should be claimed for only 7 years for measures installed in 2010. This baseline adjustment has been incorporated into the measure life for the applicable equipment types.

### **Deemed O&M Cost Adjustment Calculation**

Conservatively not included

## **Metal Halide Track Lighting**

### **Deemed Calculation for Metal Halide Track Lighting**

A metal-halide track head produces equal or more light as compared to halogen track head(s), while using fewer watts. This measure applies to the installation of a metal halide track head replacing (a) halogen track head(s).

$$\text{Annual kWh Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{CF} * (1 + \text{WHFd}) / 1000$$

<sup>395</sup> The Consortium for Energy Efficiency publishes the High Performance T8 Specifications and the Reduced Wattage T8 Specifications periodically including a list of qualifying equipment at the following address:  
<http://www.cee1.org/com-lt/com-lt-main.php3>

<sup>396</sup> For more information, see "[http://www1.eere.energy.gov/buildings/appliance\\_standards/pdfs/74fr34080.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/pdfs/74fr34080.pdf)."

<sup>397</sup> Neubauer, M., Ka-BOOM! The Power of Appliance Standards Opportunities for New Federal Appliance and Equipment Standards, ACEEE, July 2009.

See Table 6 for WATTSbase and WATTSee values.

### **Ceramic Metal Halide Fixtures**

#### **Deemed Calculation for Ceramic Metal Halide Fixtures**

Ceramic Metal-Halide is a new type of metal-halide that provides excellent light quality with a high color-rendering index. It is typically used in place of halogen bulb(s) in applications that require excellent light quality and/or tight beam control. Ceramic Metal-Halide bulbs have high lumen output, and thus can replace multiple halogen fixtures.

$$\text{Annual kWh Savings} = (\text{WATTSbase} - \text{WATTSee}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTSbase} - \text{WATTSee}) * \text{CF} * (1 + \text{WHFd}) / 1000$$

See Table 7 for WATTSbase and WATTSee values.

#### **Deemed O&M Cost Adjustment Calculation for Ceramic Metal Halide Fixtures**

O&M cost adjustments were developed assuming a typical baseline and efficient equipment scenario. For ceramic metal halide fixtures replacing halogen fixtures, the levelized annual baseline replacement cost assumption is calculated as \$24.29. The assumptions used to calculate these adjustments are detailed below.

Baseline 75W Halogen Lamp Cost:	\$30.00 (3 lamps)
Baseline 75W Halogen Lamp Life:	2,500 hrs
Baseline 75W Halogen Lamp Labor Cost:	\$2.67
70W CMH Lamp Cost:	\$60
70W CMH Lamp Life:	12,000 hrs
70W CMH Lamp Labor Cost:	\$2.67
70W CMH Ballast Cost:	\$90
70W CMH Ballast Life:	40,000 hrs
70W CMH Ballast Labor Cost:	\$22.50 (30 min @ \$45 per hour labor)

#### **Deemed Lifetime of Efficient Equipment**

The expected measure life is dependent on technology type as below:

<b>Technology Type</b>	<b>Lifetime</b>
Screw-in CFL	3.2 years <sup>398</sup>
CFL Fixture	12 years <sup>399</sup>
High Bay Fluorescent Fixture	15 years <sup>400</sup>
High Efficiency Linear Fluorescent Fixtures – 4ft lamps	7 years <sup>401</sup>
High Efficiency Linear Fluorescent Fixtures – all others	15 years <sup>402</sup>

<sup>398</sup> Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010. Assumes 12,000 hours lamp lifetime with extended burn times per start typical in commercial applications. Assuming 3,730 annual lighting operating hours for the commercial sector from the source document, the lamp lifetime is calculated as: 12,000 / 3,730 = 3.2 years

<sup>399</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008

<sup>400</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>401</sup> See discussion in measure’s “Baseline Adjustment” section.

Metal Halide Track Lighting	15 years <sup>403</sup>
Ceramic Metal Halide	15 years <sup>404</sup>

### Deemed Measure Cost

The incremental capital costs for this measure vary by the assumed baseline and efficient equipment scenarios. Incremental costs by measure type are presented below:

Measure Type	Incremental Cost
Screw-in CFL	\$3 <sup>405</sup>
CFL Fixture (1-lamp)	\$35 <sup>406</sup>
CFL Fixture (2-lamp)	\$40 <sup>407</sup>
High Bay Fluorescent Fixture	\$150 <sup>408</sup>
High Efficiency Linear Fluorescent Fixture	25 <sup>409</sup>
20 Watt Ceramic Metal Halide	\$130 <sup>410</sup>
39 Watt Ceramic Metal Halide	\$130
50 Watt Ceramic Metal Halide	\$95
70 Watt Ceramic Metal Halide	\$95
100 Watt Ceramic Metal Halide	\$90
150 Watt Ceramic Metal Halide	\$90
20 Watt Metal Halide Track	\$155
39 Watt Metal Halide Track	\$155
70 Watt Metal Halide Track	\$145

### Coincidence Factor

The summer peak coincidence factor for this measure is dependent on building type as below:

Building Type	CF <sup>411</sup>
Food Sales	0.92
Food Service	0.83
Health Care	0.78
Hotel/Motel	0.37
Office	0.76
Public Assembly	0.65
Public Services (non-food)	0.64
Retail	0.84

<sup>402</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

<sup>403</sup> Ibid.

<sup>404</sup> Ibid.

<sup>405</sup> Based on review of TRM assumptions from Vermont, New York, New Jersey and Connecticut.

<sup>406</sup> Based on review of TRM assumptions from Vermont, New York, California, and Northwestern states.

<sup>407</sup> Ibid.

<sup>408</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>409</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010, p. 110 (incremental costs vary from \$20 to \$27.50 for 1 to 4 lamps).

<sup>410</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010. This document is the source for all subsequent incremental cost estimates presented in the table.

<sup>411</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.



Building Type	CF <sup>411</sup>
Warehouse	0.79
School	0.50
College	0.68
Industrial	0.76
Garage	1.00 <sup>412</sup>
Exterior	0.00 <sup>413</sup>
Other	0.65

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = (\text{WATTS}_{\text{base}} - \text{WATTS}_{\text{See}}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

Where:

WATTS<sub>base</sub> = connected wattage of the baseline fixtures  
= Assumed baseline wattage for time of sale application. See corresponding measure table for default values.

WATTS<sub>See</sub> = connected wattage of the high efficiency fixtures  
= Actual installed

HOURS = total operating hours of the lighting. If actual site-specific value is unknown, assume default values dependent on building type as below:

Building Type	HOURS <sup>414</sup>
Food Sales	5,544
Food Service	4,482
Health Care	3,677
Hotel/Motel	3,356
Office	3,526
Public Assembly	2,729
Public Services (non-food)	3,425
Retail	4,226
Warehouse	3,464
School	2,302
College	3,900
Industrial – 1 Shift	2,857 <sup>415</sup>
Industrial – 2 Shift	4,730 <sup>416</sup>
Industrial – 3 Shift	6,631 <sup>417</sup>
Exterior	3,833 <sup>418</sup>

<sup>412</sup> Assumption consistent with 8,760 operating hours assumption.

<sup>413</sup> Assumes that no exterior lighting is operating during the summer on-peak demand period.

<sup>414</sup> Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, unless otherwise noted.

<sup>415</sup> UI and CL&P Program Savings Documentation for 2010 Program Year, United Illuminating Company, September 2009.

<sup>416</sup> Ibid.

<sup>417</sup> Ibid.

<sup>418</sup> Exterior lighting 3,833 hours per year assumes 10.5 hours per day; typical average for photocell control.

Building Type	HOURS <sup>414</sup>
Other	3,672

WHFe = lighting-HVAC Interaction Factor for energy; this factor represents the reduced electric space cooling requirements due to the reduction of waste heat rejected by the efficient lighting.  
= 0.095 (interior fixtures), 0.000 (exterior fixtures)<sup>419</sup>  
1 / 1000 = conversion factor from watts to kilowatts

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (WATTS_{base} - WATTS_{see}) * CF * (1 + WHFd) / 1000$$

Where:

WHFd = lighting-HVAC waste heat factor for demand; this factor represents the reduced electric space cooling requirements due to the reduction of waste heat rejected by the efficient lighting.  
= 0.200 (interior fixtures), 0.000 (exterior fixtures)<sup>420</sup>  
CF = Summer Peak Coincidence Factor for measure  
Dependent on building type as below:

Building Type	CF <sup>421</sup>
Food Sales	0.92
Food Service	0.83
Health Care	0.78
Hotel/Motel	0.37
Office	0.76
Public Assembly	0.65
Public Services (non-food)	0.64
Retail	0.84
Warehouse	0.79
School	0.50
College	0.68
Industrial	0.76
Garage	1.00 <sup>422</sup>

<sup>419</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Values were weighted based on program participation data for a small commercial program conducted in Indiana for Duke Energy. See An Evaluation of the Indiana Small Commercial and Industrial Incentive Program. Prepared by TecMarket Works for Duke Energy. June 2007. Building prototypes used in the energy modeling are described in the referenced document, "Prototypical Building Energy Simulation Model Development.doc".

<sup>420</sup> Ibid.

<sup>421</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.

<sup>422</sup> Assumption consistent with 8,760 operating hours assumption.

Building Type	CF <sup>421</sup>
Exterior	0.00 <sup>423</sup>
Other	0.65

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = \Delta \text{kWh} * \text{IF}_{\text{MMBtu}}$$

Where:

IF<sub>MMBtu</sub> = lighting-HVAC Interaction Factor for gas heating impacts; this factor represents the increased gas space heating requirements due to the reduction of waste heat rejected by the efficient lighting.  
= -0.0028 (interior fixtures), 0.0000 (exterior fixtures)<sup>424</sup>

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

See the individual technology sections above.

<sup>423</sup> Assumes that no exterior lighting is operating during the summer on-peak demand period.

<sup>424</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Values were weighted based on program participation data for a small commercial program conducted in Indiana for Duke Energy. See An Evaluation of the Indiana Small Commercial and Industrial Incentive Program. Prepared by TecMarket Works for Duke Energy. June 2007. Building prototypes used in the energy modeling are described in the referenced document, "Prototypical Building Energy Simulation Model Development.doc".

## Reference Tables

### Calculation of O&M Impact for Baseline

Measure Life	3.22	Bulb Assumptions	
Real Discount Rate (RD)	5.00%		
		Inc	Halogen
Component 1 Life (years)		0.27	0.81
Component 1 Replacement Cost		\$1.87	\$2.46

2010		Year	2010	2011	2012	2013
		NPV				
21W+	Baseline Replacement Costs	\$6.34	\$1.87	\$1.87	\$2.46	\$0.54
16-20W	Baseline Replacement Costs	\$5.80	\$1.87	\$1.87	\$1.87	\$0.54
15W and less	Baseline Replacement Costs	\$5.69	\$1.87	\$1.87	\$1.87	\$0.41
2011		Year	2011	2012	2013	2014
		NPV				
21W+	Baseline Replacement Costs	\$6.91	\$1.87	\$2.46	\$2.46	\$0.54
16-20W	Baseline Replacement Costs	\$6.34	\$1.87	\$1.87	\$2.46	\$0.54
15W and less	Baseline Replacement Costs	\$5.80	\$1.87	\$1.87	\$1.87	\$0.54
2012		Year	2012	2013	2014	2015
		NPV				
21W+	Baseline Replacement Costs	\$7.50	\$2.46	\$2.46	\$2.46	\$0.54
16-20W	Baseline Replacement Costs	\$6.91	\$1.87	\$2.46	\$2.46	\$0.54
15W and less	Baseline Replacement Costs	\$6.34	\$1.87	\$1.87	\$2.46	\$0.54
2013		Year	2013	2014	2015	2016
		NPV				
21W+	Baseline Replacement Costs	\$7.50	\$2.46	\$2.46	\$2.46	\$0.54
16-20W	Baseline Replacement Costs	\$7.50	\$2.46	\$2.46	\$2.46	\$0.54
15W and less	Baseline Replacement Costs	\$6.91	\$1.87	\$2.46	\$2.46	\$0.54

CFL wattage	NPV of baseline Replacement Costs				
	2010	2011	2012	2013	2014 on
21W+	\$6.34	\$6.91	\$7.50	\$7.50	\$7.50
16-20W	\$5.80	\$6.34	\$6.91	\$7.50	\$7.50
15W and less	\$5.69	\$5.80	\$6.34	\$6.91	\$7.50

**Table 4: High Bay Fixture Baseline and Efficient Wattages**

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTS ee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTS base)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
High Bay	T-5 46" Two Lamp High Output	Electronic - PRS	150W Pulse Start Metal Halide	Magnetic-CWA	117	4	183	4	66
High Bay	T-5 46" Three Lamp High Output	Electronic - PRS	200W Pulse Start Metal Halide	Magnetic-CWA	181	4	232	3	51
High Bay	T-5 46" Four Lamp High Output	Electronic – IS	320W Pulse Start Metal Halide	Magnetic-CWA	234	3	365	3	131
High Bay	T-5 46" Six Lamp High Output	Electronic – IS	350W Pulse Start Metal Halide	Magnetic-CWA	351	3	400	3	49
High Bay	T-5 46" Eight Lamp High Output	Electronic – IS	1000W Pulse Start Metal Halide	Magnetic-CWA	468	3	1080	3	612
High Bay	T-5 46" Six Lamp High Output (2 Fixtures)	Electronic – IS	1000W Pulse Start Metal Halide	Magnetic-CWA	702	3	1080	3	378
High Bay	T-8 48" Two Lamp Very High Output	Electronic – IS	150W Pulse Start Metal Halide	Magnetic-CWA	77	4	183	4	106
High Bay	T-8 48" Three Lamp Very High Output	Electronic – IS	150W Pulse Start Metal Halide	Magnetic-CWA	112	3	183	4	71
High Bay	T-8 48" Four Lamp Very High Output	Electronic – IS	200W Pulse Start Metal Halide	Magnetic-CWA	151	3	232	3	81
High Bay	T-8 48" Six Lamp Very High Output	Electronic – IS	320W Pulse Start Metal Halide	Magnetic-CWA	226	3	365	3	139
High Bay	T-8 48" Eight Lamp Very High Output	Electronic - PRS	350W Pulse Start Metal Halide	Magnetic-CWA	288	4	400	3	112
High Bay	T-8 48" Eight Lamp Very High Output (2 Fixtures)	Electronic – PRS	1000W Pulse Start Metal Halide	Magnetic-CWA	576	4	1080	3	504

**Table 5: High Efficiency Fluorescent (HEF) Fixture Baseline and Efficient Wattages**

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTSee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTSbase)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
HEF	T-8 24" One Lamp	Electronic	T-12 24" One Lamp	Magnetic-STD	18	3	28	3	10
HEF	T-8 24" Two Lamp	Electronic	T-12 24" Two Lamp	Magnetic-STD	32	3	56	3	24

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTSee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTsbase)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
HEF	T-8 24" Three Lamp	Electronic	T-12 24" Three Lamp	Magnetic-STD	50	3	62	3	12
HEF	T-8 24" Four Lamp	Electronic	T-12 24" Four Lamp	Magnetic-STD	65	3	112	3	47
HEF	T-8 36" One Lamp	Electronic	T-12 36" One Lamp	Magnetic-STD	25	3	46	3	21
HEF	T-8 36" Two Lamp	Electronic	T-12 36" Two Lamp	Magnetic-STD	46	3	81	3	35
HEF	T-8 36" Three Lamp	Electronic	T-12 36" Three Lamp	Magnetic-STD	70	3	127	3	57
HEF	T-8 36" Four Lamp	Electronic	T-12 36" Four Lamp	Magnetic-STD	88	3	162	3	74
HEF	Reduced Wattage T-8 48" One Lamp-28W	Electronic – IS	T-8 48" One Lamp	Electronic - IS	23.3	2	31	3	7.7
HEF	Reduced Wattage T-8 48" Two Lamp-28W	Electronic – IS	T-8 48" Two Lamp	Electronic - IS	47	2	59	3	12
HEF	Reduced Wattage T-8 48" Three Lamp-28W	Electronic – IS	T-8 48" Three Lamp	Electronic - IS	69.9	2	89	3	19.1
HEF	Reduced Wattage T-8 48" Four Lamp-28W	Electronic – IS	T-8 48" Four Lamp	Electronic - IS	92.6	2	112	3	19.4
HEF	Reduced Wattage T-8 48" One Lamp-25W	Electronic – IS	T-8 48" One Lamp	Electronic - IS	22	2	31	3	9
HEF	Reduced Wattage T-8 48" Two Lamp-25W	Electronic – IS	T-8 48" Two Lamp	Electronic - IS	41	2	59	3	18
HEF	Reduced Wattage T-8 48" Three Lamp-25W	Electronic – IS	T-8 48" Three Lamp	Electronic - IS	61.3	2	89	3	27.7
HEF	Reduced Wattage T-8 48" Four Lamp-25W	Electronic – IS	T-8 48" Four Lamp	Electronic - IS	80.5	2	112	3	31.5
HEF	T-8 96" One Lamp	Electronic – IS	T-12 96" One Lamp-ES	Magnetic-STD	58	3	75	3	17
HEF	T-8 96" Two Lamp	Electronic – IS	T-12 96" Two Lamp-ES	Magnetic-ES	109	3	123	3	14
HEF	T-8 96" Four Lamp	Electronic – IS	T-12 96" Four Lamp-ES	Magnetic-ES	219	3	246	3	27
HEF	High Performance T-8 48" One Lamp	Electronic	T-8 48" One Lamp	Electronic - IS	25	6	31	3	6
HEF	High Performance T-8 48" Two Lamp	Electronic	T-8 48" Two Lamp	Electronic - IS	48	6	59	3	10
HEF	High Performance T-8 48" Three Lamp	Electronic	T-8 48" Three Lamp	Electronic - IS	73	6	89	3	17
HEF	High Performance T-8 48" Four Lamp	Electronic	T-8 48" Four Lamp	Electronic - IS	96	6	112	3	18

**Table 6: Metal Halide Track (MHT) Lighting Baseline and Efficient Wattages**

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTSee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTsbase)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
MHT	Metal Halide 20W		Two 50W Halogen		23	1	100	1	77
MHT	Metal Halide 39W		Two 75W Halogen		43	1	150	1	107
MHT	Metal Halide 70W		Three 75W Halogen		77	1	225	1	148

**Table 7: Ceramic Metal Halide (CMH) Baseline and Efficient Wattages**

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTSee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTsbase)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
CMH	Ceramic Metal Halide 20W		Two 50W Halogen		26	1	100	1	74
CMH	Ceramic Metal Halide 39W		Two 75W Halogen		45	1	150	1	105
CMH	Ceramic Metal Halide 50W		Three 65W Halogen		55	1	195	1	140
CMH	Ceramic Metal Halide 70W		Three 75W Halogen		79	1	225	1	146
CMH	Ceramic Metal Halide 100W		Three 90W Halogen		110	1	270	1	160
CMH	Ceramic Metal Halide 150W		Three 120W Halogen		163	1	360	1	197

**Version Date & Revision History**

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

**Referenced Documents:**

1. Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010
2. Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010.
3. 2010 Standard Performance Contract Procedures Manual: Appendix B: 2010 Table of Standard Fixture Wattages. Ver. 1.1, Southern California Edison. February 25, 2010. Web. Accessed June, 19 2010. <<http://www.aesc-inc.com/download/SPC/2010SPCDocs/UnifiedManual/App%20B%20Standard%20Fixture%20Watts.pdf>>
4. 2009 EPE Program Downloads. Wattage Table 2009. Web. Accessed September, 26 2009. <<http://www.epelectricefficiency.com/downloads.asp?section=ci>>.
5. New Jersey Clean Energy Program: Protocols to Measure Resource Savings. December 2007.
6. Thorne and Nadel, Commercial Lighting Retrofits: A Briefing Report for Program Implementers, American Council for an Energy-Efficient Economy, April 2003.



## Lighting Systems (Non-Controls) (Early Replacement, Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of new lighting equipment with efficiency that exceeds that of the existing equipment. This characterization could apply to measures such as compact fluorescent lamps (CFLs) and fixtures, linear fluorescent lamps and fixtures, linear fluorescent fixtures replacing high-intensity discharge (HID) fixtures in high-bay applications, high-intensity discharge (HID) fixtures, and delamping. This measure could relate to the early replacement of an existing unit before the end of its useful life or the retrofit of a unit in an existing facility.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment must have higher efficiency than the existing equipment.

### Definition of Baseline Equipment

The baseline equipment is the existing equipment before the efficient equipment is installed. Default assumptions of the baseline equipment are presented in the tables below.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTS}_{\text{base}} - \text{WATT}_{\text{See}}) * \text{CF} * (1 + \text{WHFd}) / 1000$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is dependent on technology type as below:

Measure Type	Lifetime
Screw-in CFL	3.2 years <sup>425</sup>
Hardwired CFL	12 years <sup>426</sup>
High Bay Fluorescent Fixture	15 years <sup>426</sup>
High Efficiency Linear Fluorescent Fixture	15 years <sup>426</sup>
Pulse Start Metal Halide	7.5 years <sup>427</sup>
Metal Halide Track Lighting	15 years <sup>428</sup>
Ceramic Metal Halide	15 years <sup>428</sup>
Delamping	10 <sup>429</sup>

<sup>425</sup> Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010. Assumes 12,000 hours lamp lifetime with extended burn times per start typical in commercial applications. Assuming 3,730 annual lighting operating hours for the commercial sector from the source document, the lamp lifetime is calculated as: 12,000 / 3,730 = 3.2 years

<sup>426</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Effective/Remaining Useful Life Values", California Public Utilities Commission, December 16, 2008

<sup>427</sup> The Energy Independence and Security Act of 2007 requires that as of January 1, 2009, metal halide fixtures designed for use with lamps  $\geq 150$  W and  $\leq 500$  W must use "probe start" ballasts with ballast efficiency  $\geq 94\%$  or "pulse start" ballasts with ballast efficiency  $\geq 88\%$ . This essentially means that new metal halide fixtures will utilize "pulse start" technology. Assuming that the age of the existing equipment being replaced is half of the total expected lifetime for a metal halide fixture (7.5 years), it is assumed that savings are only achieved for half of the lifetime of the new fixture at which point the customer would have had to replace the inefficient technology with "pulse start" technology negating any savings.

<sup>428</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>429</sup> Based on a review of measure life assumptions in Oregon, California, and Iowa as presented in *Measure Life Study*, Energy & Resource Solutions, November 17, 2005, delamping lifetime assumptions range from 9 to 16 years. The high end of this range exceeds the assumed fixture lifetime and has been adjusted down to a more conservative 10 years to reflect expected persistence issues.

### Deemed Measure Cost

The actual lighting measure installation cost should be used (including material and labor).

### Deemed O&M Cost Adjustments

O&M cost adjustments should be determined on a case-by-case basis.

### Coincidence Factor

The summer peak coincidence factor for this measure is dependent on building type as below:

Building Type	CF <sup>430</sup>
Food Sales	0.92
Food Service	0.83
Health Care	0.78
Hotel/Motel	0.37
Office	0.76
Public Assembly	0.65
Public Services (non-food)	0.64
Retail	0.84
Warehouse	0.79
School	0.50
College	0.68
Industrial	0.76
Garage	1.00 <sup>431</sup>
Exterior	0.00 <sup>432</sup>
Other	0.65

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = (\text{WATTS}_{\text{base}} - \text{WATTS}_{\text{see}}) * \text{HOURS} * (1 + \text{WHFe}) / 1000$$

Where:

WATTS <sub>base</sub>	= connected wattage of the baseline fixtures = Actual wattage of the existing equipment for early replacement application. If actual wattage is unknown, refer to the Baseline and Efficient Fixture Wattages Table in the Reference Table section.
WATTS <sub>see</sub>	= connected wattage of the high efficiency fixtures = Actual wattage of the efficient equipment for early replacement application. If actual wattage is unknown, refer to the Baseline and Efficient Fixture Wattages Table in the Reference Table section.
HOURS	= total operating hours of the lighting. If actual site-specific value is unknown, assume default values dependent on building type as below:

---

<sup>430</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.

<sup>431</sup> Assumption consistent with 8,760 operating hours assumption.

<sup>432</sup> Assumes that no exterior lighting is operating during the summer on-peak demand period.

Building Type	HOURS <sup>433</sup>
Food Sales	5,544
Food Service	4,482
Health Care	3,677
Hotel/Motel	3,356
Office	3,526
Public Assembly	2,729
Public Services (non-food)	3,425
Retail	4,226
Warehouse	3,464
School	2,302
College	3,900
Industrial – 1 Shift	2,857 <sup>434</sup>
Industrial – 2 Shift	4,730 <sup>435</sup>
Industrial – 3 Shift	6,631 <sup>436</sup>
Exterior	3,833 <sup>437</sup>
Other	3,672

WHFe = lighting-HVAC Iteration Factor for energy; this factor represents the reduced electric space cooling requirements due to the reduction of waste heat rejected by the efficient lighting.  
= 0.095 (interior fixtures), 0.000 (exterior fixtures)<sup>438</sup>  
1 / 1000 = conversion factor from watts to kilowatts

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (WATTS_{base} - WATTS_{see}) * CF * (1 + WHFd) / 1000$$

Where:

WHFd = lighting-HVAC waste heat factor for demand; this factor represents the reduced electric space cooling requirements due to the reduction of waste heat rejected by the efficient lighting.  
= 0.200 (interior fixtures), 0.000 (exterior fixtures)<sup>439</sup>

<sup>433</sup> Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, unless otherwise noted.

<sup>434</sup> UI and CL&P Program Savings Documentation for 2010 Program Year, United Illuminating Company, September 2009.

<sup>435</sup> Ibid.

<sup>436</sup> Ibid.

<sup>437</sup> Exterior lighting 3,833 hours per year assumes 10.5 hours per day; typical average for photocell control.

<sup>438</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Values were weighted based on program participation data for a small commercial program conducted in Indiana for Duke Energy. See An Evaluation of the Indiana Small Commercial and Industrial Incentive Program. Prepared by TecMarket Works for Duke Energy. June 2007. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

<sup>439</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light

CF = Summer Peak Coincidence Factor for measure  
Dependent on building type as below:

Building Type	CF <sup>440</sup>
Food Sales	0.92
Food Service	0.83
Health Care	0.78
Hotel/Motel	0.37
Office	0.76
Public Assembly	0.65
Public Services (non-food)	0.64
Retail	0.84
Warehouse	0.79
School	0.50
College	0.68
Industrial	0.76
Garage	1.00 <sup>441</sup>
Exterior	0.00 <sup>442</sup>
Other	0.65

#### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = \Delta k\text{Wh} * \text{IF}_{\text{MMBtu}}$$

Where:

$\text{IF}_{\text{MMBtu}}$  = lighting-HVAC Interaction Factor for gas heating impacts; this factor represents the increased gas space heating requirements due to the reduction of waste heat rejected by the efficient lighting.  
= -0.0028 (interior fixtures), 0.0000 (exterior fixtures)<sup>443</sup>

#### Water Impact Descriptions and Calculation

n/a

---

industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Values were weighted based on program participation data for a small commercial program conducted in Indiana for Duke Energy. See An Evaluation of the Indiana Small Commercial and Industrial Incentive Program. Prepared by TecMarket Works for Duke Energy. June 2007. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

<sup>440</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.

<sup>441</sup> Assumption consistent with 8,760 operating hours assumption.

<sup>442</sup> Assumes that no exterior lighting is operating during the summer on-peak demand period.

<sup>443</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Values were weighted based on program participation data for a small commercial program conducted in Indiana for Duke Energy. See An Evaluation of the Indiana Small Commercial and Industrial Incentive Program. Prepared by TecMarket Works for Duke Energy. June 2007. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

## Reference Tables

**Table 8: Baseline and Efficient Fixture Wattages**

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTS ee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTS base)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
High Bay	T-5 46" Two Lamp High Output	Electronic - PRS	150W Metal Halide	Magnetic-CWA	117	4	190	3	73
High Bay	T-5 46" Three Lamp High Output	Electronic - PRS	250W Metal Halide	Magnetic-CWA	181	4	295	3	114
High Bay	T-5 46" Four Lamp High Output	Electronic – IS	400W Metal Halide	Magnetic-CWA	234	3	458	3	224
High Bay	T-5 46" Six Lamp High Output	Electronic – IS	400W Metal Halide	Magnetic-CWA	351	3	458	3	107
High Bay	T-5 46" Eight Lamp High Output	Electronic – IS	1000W Metal Halide	Magnetic-CWA	468	3	1080	3	612
High Bay	T-5 46" Six Lamp High Output (2 Fixtures)	Electronic – IS	1000W Metal Halide	Magnetic-CWA	702	3	1080	3	378
High Bay	T-8 48" Two Lamp Very High Output	Electronic – IS	150W Metal Halide	Magnetic-CWA	77	4	190	3	113
High Bay	T-8 48" Three Lamp Very High Output	Electronic – IS	150W Metal Halide	Magnetic-CWA	112	3	190	3	78
High Bay	T-8 48" Four Lamp Very High Output	Electronic – IS	250W Metal Halide	Magnetic-CWA	151	3	295	3	144
High Bay	T-8 48" Six Lamp Very High Output	Electronic – IS	400W Metal Halide	Magnetic-CWA	226	3	458	3	232
High Bay	T-8 48" Eight Lamp Very High Output	Electronic - PRS	400W Metal Halide	Magnetic-CWA	288	4	458	3	170
High Bay	T-8 48" Eight Lamp Very High Output (2 Fixtures)	Electronic – PRS	1000W Metal Halide	Magnetic-CWA	576	4	1080	3	504
HEF	T-8 24" One Lamp	Electronic	T-12 24" One Lamp	Magnetic-STD	18	3	28	3	10
HEF	T-8 24" Two Lamp	Electronic	T-12 24" Two Lamp	Magnetic-STD	32	3	56	3	24
HEF	T-8 24" Three Lamp	Electronic	T-12 24" Three Lamp	Magnetic-STD	50	3	62	3	12
HEF	T-8 24" Four Lamp	Electronic	T-12 24" Four Lamp	Magnetic-STD	65	3	112	3	47
HEF	T-8 36" One Lamp	Electronic	T-12 36" One Lamp	Magnetic-STD	25	3	46	3	21
HEF	T-8 36" Two Lamp	Electronic	T-12 36" Two Lamp	Magnetic-STD	46	3	81	3	35
HEF	T-8 36" Three Lamp	Electronic	T-12 36" Three Lamp	Magnetic-STD	70	3	127	3	57
HEF	T-8 36" Four Lamp	Electronic	T-12 36" Four Lamp	Magnetic-STD	88	3	162	3	74
HEF	T-8 48" One Lamp-28W	Electronic - IS	T-12 48" One Lamp-ES	Magnetic-ES	23.3	2	43	3	19.7
HEF	T-8 48" Two Lamp-28W	Electronic - IS	T-12 48" Two Lamp-ES	Magnetic-ES	47	2	72	3	25
HEF	T-8 48" Three Lamp-28W	Electronic - IS	T-12 48" Three Lamp-ES	Magnetic-ES	69.9	2	115	3	45.1

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTS ee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTS base)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
HEF	T-8 48" Four Lamp-28W	Electronic - IS	T-12 48" Four Lamp-ES	Magnetic-ES	92.6	2	144	3	51.4
HEF	T-8 48" One Lamp-25W	Electronic - IS	T-12 48" One Lamp-ES	Magnetic-ES	22	2	43	3	21
HEF	T-8 48" Two Lamp-25W	Electronic - IS	T-12 48" Two Lamp-ES	Magnetic-ES	41	2	72	3	31
HEF	T-8 48" Three Lamp-25W	Electronic - IS	T-12 48" Three Lamp-ES	Magnetic-ES	61.3	2	115	3	53.7
HEF	T-8 48" Four Lamp-25W	Electronic - IS	T-12 48" Four Lamp-ES	Magnetic-ES	80.5	2	144	3	63.5
HEF	T-8 96" One Lamp	Electronic - IS	T-12 96" One Lamp-ES	Magnetic-STD	58	3	75	3	17
HEF	T-8 96" Two Lamp	Electronic - IS	T-12 96" Two Lamp-ES	Magnetic-ES	109	3	123	3	14
HEF	T-8 96" Four Lamp	Electronic - IS	T-12 96" Four Lamp-ES	Magnetic-ES	219	3	246	3	27
HEF	High Performance T-8 48" One Lamp	Electronic	T-12 48" One Lamp-ES	Magnetic-ES	25	6	43	3	18
HEF	High Performance T-8 48" Two Lamp	Electronic	T-12 48" Two Lamp-ES	Magnetic-ES	48	6	72	3	23
HEF	High Performance T-8 48" Three Lamp	Electronic	T-12 48" Three Lamp-ES	Magnetic-ES	73	6	115	3	43
HEF	High Performance T-8 48" Four Lamp	Electronic	T-12 48" Four Lamp-ES	Magnetic-ES	96	6	144	3	50
MHT	Metal Halide 20W		Two 50W Halogen		23	1	100	1	77
MHT	Metal Halide 39W		Two 75W Halogen		43	1	150	1	107
MHT	Metal Halide 70W		Three 75W Halogen		77	1	225	1	148
CMH	Ceramic Metal Halide 20W		Two 50W Halogen		26	1	100	1	74
CMH	Ceramic Metal Halide 39W		Two 75W Halogen		45	1	150	1	105
CMH	Ceramic Metal Halide 50W		Three 65W Halogen		55	1	195	1	140
CMH	Ceramic Metal Halide 70W		Three 75W Halogen		79	1	225	1	146
CMH	Ceramic Metal Halide 100W		Three 90W Halogen		110	1	270	1	160
CMH	Ceramic Metal Halide 150W		Three 120W Halogen		163	1	360	1	197
Delamp	No Lamp	Magnetic-STD	T-12 18" One Lamp	Magnetic-STD	4	TBD	19	3	15
Delamp	No Lamp	No Ballast	T-12 18" One Lamp	Magnetic-STD	0	TBD	19	3	19
Delamp	No Lamp	Magnetic-STD	T-12 24" One Lamp	Magnetic-STD	8	TBD	28	3	20
Delamp	No Lamp	No Ballast	T-12 24" One Lamp	Magnetic-STD	0	TBD	28	3	28
Delamp	No Lamp	Magnetic-STD	T-12 36" One Lamp	Magnetic-STD	16	TBD	46	3	30
Delamp	No Lamp	No Ballast	T-12 36" One Lamp	Magnetic-STD	0	TBD	46	3	46
Delamp	No Lamp	Magnetic-STD	T-12 48" One Lamp	Magnetic-STD	21	TBD	60	3	39

Type of Measure	Efficient Lamp	Efficient Fixture Ballast Type	Baseline Lamp	Baseline Fixture Ballast Type	Efficient Fixture Wattage (WATTS ee)	Efficient Fixture Wattage Source	Baseline Fixture Wattage (WATTS base)	Baseline Fixture Wattage Source	Fixture Savings (Watts)
Delamp	No Lamp	No Ballast	T-12 48" One Lamp	Magnetic-STD	0	TBD	60	3	60
Delamp	No Lamp	Magnetic-STD	T-12 60" One Lamp	Magnetic-STD	13	TBD	63	3	50
Delamp	No Lamp	No Ballast	T-12 60" One Lamp	Magnetic-STD	0	TBD	63	3	63
Delamp	No Lamp	Magnetic-STD	T-12 72" One Lamp	Magnetic-STD	21	TBD	76	3	55
Delamp	No Lamp	No Ballast	T-12 72" One Lamp	Magnetic-STD	0	TBD	76	3	76
Delamp	No Lamp	Magnetic-STD	T-12 96" One Lamp	Magnetic-STD	15	TBD	90	TBD	75
Delamp	No Lamp	No Ballast	T-12 96" One Lamp	Magnetic-STD	0	TBD	90	TBD	90
Delamp	T-8 24" One Lamp	Electronic – IS	T-8 24" Two Lamp	Electronic - IS	16	TBD	33	TBD	17
Delamp	T-8 36" One Lamp	Electronic – IS	T-8 36" Two Lamp	Electronic - IS	21	TBD	46	TBD	25
Delamp	T-8 48" One Lamp	Electronic – IS	T-8 48" Two Lamp	Electronic - IS	27	TBD	59	TBD	32
Delamp	T-8 60" One Lamp	Electronic – IS	T-8 60" Two Lamp	Electronic - IS	32	TBD	72	TBD	40
Delamp	T-8 96" One Lamp	Electronic – IS	T-8 96" Two Lamp	Electronic - IS	50	TBD	109	TBD	59

Sources:

1. Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010
2. Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010.
3. 2010 Standard Performance Contract Procedures Manual: Appendix B: 2010 Table of Standard Fixture Wattages. Ver. 1.1, Southern California Edison. February 25, 2010. Web. Accessed June, 19 2010. <<http://www.aesc-inc.com/download/SPC/2010SPCDocs/UnifiedManual/App%20B%20Standard%20Fixture%20Watts.pdf>>
4. 2009 EPE Program Downloads. Wattage Table 2009. Web. Accessed September, 26 2009. <<http://www.epelectricefficiency.com/downloads.asp?section=ci>>.
5. New Jersey Clean Energy Program: Protocols to Measure Resource Savings. December 2007.
6. Thorne and Nadel, Commercial Lighting Retrofits: A Briefing Report for Program Implementers, American Council for an Energy-Efficient Economy, April 2003.

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Lighting Power Density Reduction (New Construction)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the implementation of various lighting design principles aimed at creating a quality and appropriate lighting experience while reducing unnecessary light usage. This is often done by a professional in a new construction situation. Techniques like maximizing daylighting, task lighting, lighting controls, and efficient fixtures are used to create a system of optimal functionality while reducing total lighting power density.

### Definition of Efficient Equipment

In order for this characterization to apply, this measure assumes the high efficiency equipment consists of a lighting system that exceeds the lighting power density requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 505.5.2.

### Definition of Baseline Equipment

The baseline efficiency assumes compliance with lighting power density requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 505.5.2.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{WATTS}_{\text{base}} - \text{WATTS}_{\text{see}}) / 1000 * \text{AREA} * \text{HOURS} * (1 + \text{WHFe})$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTS}_{\text{base}} - \text{WATTS}_{\text{see}}) / 1000 * \text{AREA} * (1 + \text{WHFd}) * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is measure is 15 years<sup>444</sup>.

### Deemed Measure Cost

The incremental capital costs for this measure vary by the assumed baseline and efficient equipment scenarios. Incremental costs by measure type are presented below:

### Coincidence Factor

The summer peak coincidence factor for this measure is dependent on building type as below:

Building Type	CF <sup>445</sup>
Food Sales	0.92
Food Service	0.83
Health Care	0.78
Hotel/Motel	0.37
Office	0.76
Public Assembly	0.65
Public Services (non-food)	0.64
Retail	0.84
Warehouse	0.79
School	0.50

<sup>444</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>445</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.



Building Type	CF <sup>445</sup>
College	0.68
Industrial	0.76
Garage	1.00 <sup>446</sup>
Other	0.65

---



---

## REFERENCE SECTION

---



---

### Calculation of Savings

#### Energy Savings

$$\Delta kWh = ((WATTS_{base} - WATTS_{see}) / 1000 * AREA * HOURS * (1 + WHFe))$$

Where:

WATTS<sub>base</sub><sup>447</sup> = allowed lighting wattage per square foot based on energy code requirements for building type; see table below for values:

Building Area Type	Lighting Power Density (W/ft <sup>2</sup> )
Automotive Facility	0.9
Convention Center	1.2
Court House	1.2
Dining: Bar Lounge/Leisure	1.3
Dining: Cafeteria/Fast Food	1.4
Dining: Family	1.6
Dormitory	1.0
Exercise Center	1.0
Gymnasium	1.1
Healthcare-Clinic	1.0
Hospital/Healthcare	1.2
Hotel	1.0
Library	1.3
Manufacturing Facility	1.3
Motel	1.0
Motion Picture Theatre	1.2
Multi-Family	0.7
Museum	1.1
Office	1.0
Parking Garage	0.3
Penitentiary	1.0
Performing Arts Theatre	1.6
Police/Fire Station	1.0
Post Office	1.1
Religious Building	1.3
Retail	1.5
School/University	1.2

<sup>446</sup> Assumption consistent with 8,760 operating hours assumption.

<sup>447</sup> International Energy Conservation Code (IECC 2006) 2006, Table 505.5.2, Interior Lighting Power Allowances

Building Area Type	Lighting Power Density (W/ft <sup>2</sup> )
Sports Arena	1.1
Town Hall	1.1
Transportation	1.0
Warehouse	0.8
Workshop	1.4

WATSSee = actual installed lighting wattage per square foot of the efficient lighting system for building type as determined by site-surveys or design diagrams.  
 1000 = conversion factor (W / kW)  
 AREA = area of the building in square feet; determined from site-specific information  
 HOURS = annual site-specific hours of operation of the lighting equipment; dependent on building type as below:

Building Type	HOURS <sup>448</sup>
Food Sales	5,544
Food Service	4,482
Health Care	3,677
Hotel/Motel	3,356
Office	3,526
Public Assembly	2,729
Public Services (non-food)	3,425
Retail	4,226
Warehouse	3,464
School	2,302
College	3,900
Industrial	4,745
Garage	8,760 <sup>449</sup>
Other	3,672

WHFe = lighting-HVAC Interaction Factor for energy; this factor represents the reduced electric space cooling requirements due to the reduction of waste heat rejected by the efficient lighting.  
 = 0.095 (interior fixtures), 0.000 (exterior fixtures)<sup>450</sup>

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (WATTS_{base} - WATTS_{See}) * CF * (1 + WHFe) / 1000$$

Where:

<sup>448</sup> Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009

<sup>449</sup> Assumes operation 24 hours per day, 365 days per year.

<sup>450</sup> Interactive factor data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for the following Ohio cities: Cincinnati, Cleveland, Columbus and Dayton. Values were weighted based on program participation data for a small commercial program conducted in Indiana for Duke Energy. See An Evaluation of the Indiana Small Commercial and Industrial Incentive Program. Prepared by TecMarket Works for Duke Energy. June 2007. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

WHFd = lighting-HVAC waste heat factor for demand; this factor represents the reduced electric space cooling requirements due to the reduction of waste heat rejected by the efficient lighting.  
 = 0.200 (interior fixtures), 0.000 (exterior fixtures)<sup>419</sup>

CF = Summer Peak Coincidence Factor for measure  
 Dependent on building type as below:

Building Type	CF <sup>451</sup>
Food Sales	0.92
Food Service	0.83
Health Care	0.78
Hotel/Motel	0.37
Office	0.76
Public Assembly	0.65
Public Services (non-food)	0.64
Retail	0.84
Warehouse	0.79
School	0.50
College	0.68
Industrial	0.76
Garage	1.00 <sup>452</sup>
Other	0.65

#### Fossil Fuel Impact Descriptions and Calculation

TBD<sup>453</sup>

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

**Referenced Documents:** “Draft TRM - C&I Buildings Model Development.doc”

<sup>451</sup> Methodology adapted from Kuiken et al, “State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development”, KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.

<sup>452</sup> Assumption consistent with 8,760 operating hours assumption.

<sup>453</sup> This section pending further information from utilities regarding the energy simulation models used to derive the lighting-HVAC interaction factors.

## LED Case Lighting with/without Motion Sensors (New Construction; Retrofit – Early Replacement)

**Official Measure Code** (Measure Number: **X-X-X-X (Program name, End Use)**)

### Description

This measure relates to the installation of LED lamps with and without motion sensors in vertical display refrigerators, coolers, and freezers replacing T8 or T12 linear fluorescent lamp technology. LED lamps should be systems intended for this application. LED lamps not only provide the same light output with lower connected wattages, but also produce less waste heat which decreases the cooling load on the refrigeration system and energy needed by the refrigerator compressor. Additional savings can be achieved from the installation of a motion sensor which automatically dims the lighting system when the space is unoccupied. Retrofit projects must completely remove the existing fluorescent fixture end connectors and ballasts to qualify, though wiring may be reused. Eligible fixtures include new, replacement, and retrofit. Savings and assumptions are based on a per door basis.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be LED case lighting with or without motion sensors on refrigerators, coolers, and freezers - specifically on vertical displays.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be T8 or T12 linear fluorescent lamps.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{WATTs}_{\text{base}} - \text{WATTs}_{\text{see}}) / 1000 * \text{Ndoors} * \text{HOURS} * (1 + \text{WHFe}) * \text{ESF}_{\text{MC}}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{WATTs}_{\text{base}} - \text{WATTs}_{\text{see}}) / 1000 * \text{Ndoors} * (1 + \text{WHFd}) * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 8.1 years<sup>454</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is \$250 per door (retrofit), and \$150 (time of sale, new construction)<sup>455</sup>.

If a motion sensor is installed, add an additional cost of \$130 per 25ft of case<sup>456</sup>.

### Deemed O&M Cost Adjustments

The stream of baseline lamp replacement costs over the lifetime of the measure results in a Net Present Value<sup>457</sup> of \$22.96. This computes to a levelized annual baseline replacement cost assumption of \$4.07.

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 92%<sup>458</sup>.

<sup>454</sup> Theobald, M. A., Emerging Technologies Program: Application Assessment Report #0608, LED Supermarket Case Lighting Grocery Store, Northern California, Pacific Gas and Electric Company, January 2006. Assumes annual operating hours of 6,205. <[http://www.etcc-ca.com/images/stories/pdf/ETCC\\_Report\\_204.pdf](http://www.etcc-ca.com/images/stories/pdf/ETCC_Report_204.pdf)>. The lifetime of the motion sensors is assumed to be equal to the lifetime of the LED lighting.

<sup>455</sup> Based on a review of TRM incremental cost assumptions from Oregon and Vermont, supplemented with completed project information from New York.

<sup>456</sup> “LED Case Lighting With and Without Motion Sensors” presentation, Michele Friedrich, PEI, January 2010.

<sup>457</sup> Using a discount rate of 5.7% (as is used for Efficiency Vermont). Assumes baseline ballast life exceeds the life of the LED assembly.

---



---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta kWh = (WATTS_{base} - WATTS_{ee}) / 1000 * N_{doors} * HOURS * (1 + WHFe) * ESF_{MC}$$

Where:

WATTS<sub>base</sub> = connected wattage per door of the baseline fixtures; see table below for default values.  
WATTS<sub>ee</sub> = connected wattage per door of the high efficiency fixtures  
= Actual installed. If actual installed wattage is unknown, see table below for default values.

#### LED Refrigerated Case Lighting System Baseline and Efficient Wattages<sup>459</sup>

Type of Measure	Efficient Lamp	Baseline Lamp	Efficient Fixture Wattage (WATTS <sub>ee</sub> )	Baseline Fixture Wattage (WATTS <sub>base</sub> )	Fixture Savings (Watts)
Refrigerated Case Lighting per door	5' LED Case Lighting System	5' T8 Case Lighting System	38	76	38
Refrigerated Case Lighting per door	6' LED Case Lighting System	6' T12HO Case Lighting System	46	112	66

1000 = conversion factor from watts to kilowatts

N<sub>doors</sub> = number of doors

= Actual installed

HOURS = annual operating hours; assume 6,205 operating hours per year<sup>460</sup> if actual operating hours are unknown

ESF<sub>MC</sub> = Energy Savings Factor; additional savings percentage achieved with a motion sensor. Assume a value of 1.0 if no motion sensor is installed, or 1.43 if motion sensor is installed.<sup>461</sup>

WHFe = waste heat factor for energy to account for cooling savings from efficient lighting. For prescriptive refrigerated lighting measures, the default value is 0.41 for refrigerated space and 0.52 for freezer space<sup>462</sup>.

### Summer Coincident Peak Demand Savings

---

<sup>458</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.

<sup>459</sup> From Pacific Gas & Electric 'LED Refrig Lighting ERCO Talking Points v3.pdf.' The efficient wattage, 38 and 46 watts, are the maximum allowed watts for a 5-foot and 6-foot LED refrigerated case lighting system that meets the efficiency specifications of the Designlights Consortium.

<sup>460</sup> Theobald, M. A., Emerging Technologies Program: Application Assessment Report #0608, LED Supermarket Case Lighting Grocery Store, Northern California, Pacific Gas and Electric Company, January 2006. Assumes refrigerated case lighting typically operates 17 hours per day, 365 days per year.

<[http://www.etc-ca.com/images/stories/pdf/ETCC\\_Report\\_204.pdf](http://www.etc-ca.com/images/stories/pdf/ETCC_Report_204.pdf)>

<sup>461</sup> D. Bisbee, Sacramento Municipal Utility District, "Customer Advanced Technologies Program Technology Evaluation Report: LED Freezer Case Lighting Systems", July 2008.

<sup>462</sup> Values adopted from Hall, N. et al, New York Standard Approach for Estimating Energy Savings from Energy Efficiency Measures in Commercial and Industrial Programs, TecMarket Works, September 1, 2009. This factor is a candidate from future adjustment due to climatic differences between Ohio and New York.

$$\Delta kW = (WATTS_{base} - WATTS_{see}) / 1000 * N_{doors} * (1 + WHF_d) * CF$$

Where:

WHF<sub>d</sub> = waste heat factor for energy to account for cooling savings from efficient lighting. For prescriptive refrigerated lighting measures, the default value is 0.41 for refrigerated space and 0.52 for freezer space<sup>463</sup>.

CF = Summer Peak Coincidence Factor for measure  
= 0.92<sup>464</sup> (lighting in food sales)

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

The stream of baseline lamp replacement costs over the lifetime of the measure results in a Net Present Value<sup>465</sup> of \$22.96. This computes to a levelized annual baseline replacement cost assumption of \$4.07.

Baseline Lamp Cost:	\$4
Baseline Lamp Life:	12,000
Baseline Lamp Labor Cost:	\$5.00 (15 min @ \$20 per hour labor)

#### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>463</sup> Values adopted from Hall, N. et al, New York Standard Approach for Estimating Energy Savings from Energy Efficiency Measures in Commercial and Industrial Programs, TecMarket Works, September 1, 2009. This factor is a candidate from future adjustment due to climatic differences between Ohio and New York.

<sup>464</sup> Methodology adapted from Kuiken et al, "State of Wisconsin Public Service Commission of Wisconsin Focus on Energy Evaluation Business Programs: Deemed Savings Parameter Development", KEMA, November 13, 2009, assuming summer coincident peak period is defined as June through August on weekdays between 3:00 p.m. and 6:00 p.m., unless otherwise noted.

<sup>465</sup> Using a discount rate of 5.7% (as is used for Efficiency Vermont). Assumes baseline ballast life exceeds the life of the LED assembly.

## LED Exit Signs (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

These exit signs have a string of very small, typically red or green, glowing LEDs arranged in a circle or oval. The LEDs may also be arranged in a line on the side, top or bottom of the exit sign. LED exit signs provide the best balance of safety, low maintenance, and very low energy usage compared to other exit sign technologies.

### Definition of Efficient Equipment

The efficient equipment is assumed to be an exit sign illuminated by light emitting diodes.

### Definition of Baseline Equipment

The baseline equipment is assumed to be a fluorescent model.

### Deemed Savings for this Measure

Annual kWh Savings = 83 kWh

Summer Coincident Peak kW Savings = 0.010 kW

### Deemed Lifetime of Efficient Equipment

16 years<sup>466</sup>

### Deemed Measure Cost

\$30<sup>467</sup>

### Deemed O&M Cost Adjustments

The stream of replacement costs over the lifetime of the measure results in a Net Present Value of \$59. This computes to a levelized annual baseline replacement cost assumption of \$6.04.<sup>468</sup>

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 100%<sup>469</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{kW}_{\text{Save}} \times \text{HOURS} \times \text{ISR} \times \text{WHF}_e$$

Where:

$\text{kW}_{\text{Save}}$  = The difference in connected load between baseline equipment and efficient equipment  
= 0.009<sup>470</sup>

HOURS = Annual operating hours

---

<sup>466</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Effective/Remaining Useful Life Values", California Public Utilities Commission, December 16, 2008.

<sup>467</sup> NYSERDA Deemed Savings Database, Labor cost assumes 25 minutes @ \$18/hr.

<sup>468</sup> This calculation assumes a replacement baseline CFL costs \$4 with an estimated labor cost of \$5 (assuming 20\$/hour and a task time of 15 minutes). Lamp life is approximated as 2 years, assuming a 16,000 hour lamp life operating 8,760 hours per year.

<sup>469</sup> Assuming continuous operation of an LED exit sign, the Summer Peak Coincidence Factor is assumed to equal 1.0.

<sup>470</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

	= 8760
ISR	= In service rate, the percentage of rebated units that are actually in service. = 98% <sup>471</sup>
WHF <sub>e</sub>	= Waste heat factor for energy; accounts for cooling savings from efficient lighting. The default value for this measure is 1.08 (calculated as $(1 + (0.5 * 0.4 / 2.5))$ ). Based on the assumption that 50% of spaces have mechanical cooling, with a typical 2.5 C.O.P. cooling system efficiency and 0.4 ASHRAE Lighting waste heat cooling factor for Ohio <sup>472</sup> = 1.08

### Summer Coincident Peak Demand Savings

$$\Delta kW = kW_{\text{Save}} \times \text{ISR} \times \text{WHF}_d$$

Where:

ISR	= In service rate, the percentage of rebated units that are actually in service. = 98% <sup>473</sup>
$kW_{\text{Save}}$	= The difference in connected load between baseline equipment and efficient equipment = 0.009 <sup>474</sup>
WHF <sub>d</sub>	= Waste heat factor for demand to account for cooling savings from efficient lighting. For prescriptive measures, the default value for this measure is 1.17 (calculated as $(1 + (0.5 * 0.85 / 2.5))$ ). Based on the assumption that 50% of spaces have mechanical cooling, with a typical 2.5 COP cooling system efficiency and assuming 85% of lighting heat needs to be mechanically cooled at time of summer peak. <sup>475</sup> = 1.17

### Fossil Fuel Impact Descriptions and Calculation

n/a<sup>476</sup>

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

The stream of replacement costs over the lifetime of the measure results in a Net Present Value of \$59. This computes to a levelized annual baseline replacement cost assumption of \$6.04.<sup>477</sup>

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>471</sup> Ibid.

<sup>472</sup> “Calculating Lighting and HVAC Interactions”, Table 1, ASHRAE Journal, November 1993

<sup>473</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>474</sup> Efficiency Vermont TRM

<sup>475</sup> “Calculating Lighting and HVAC Interactions”, Table 1, ASHRAE Journal, November 1993; source assumes that 80% of lighting heat offsets heating requirements, and 90% of lighting heat needs to be mechanically cooled.

<sup>476</sup> Pending additional information from utilities regarding the modeled waste heat factors for commercial lighting.

<sup>477</sup> This calculation assumes a replacement baseline CFL costs \$4 with an estimated labor cost of \$5 (assuming 20\$/hour and a task time of 15 minutes). Lamp life is approximated as 2 years, assuming a 16,000 hour lamp life operating 8,760 hours per year.



## Traffic Signals (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Traffic and pedestrian signals are illuminated with light emitting diodes (LED) instead of incandescent lamps.

### Definition of Efficient Equipment

Refer to the Table titled ‘Traffic Signals Technology Equivalencies’ for efficient technology wattage and savings assumptions.

### Definition of Baseline Equipment

Refer to the Table titled ‘Traffic Signals Technology Equivalencies’ for baseline efficiencies and savings assumptions.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings} = (W_{\text{base}} - W_{\text{eff}}) \times \text{HOURS} / 1000$$

$$\text{Summer Coincident Peak kW Savings} = (W_{\text{base}} - W_{\text{eff}}) \times \text{CF} / 1000$$

### Deemed Lifetime of Efficient Equipment

The assumed lifetime of an LED traffic signal is 100,000 hours (manufacturer’s estimate), capped at 10 years.<sup>478</sup> The life in years is calculated by dividing 100,000 hrs by the annual operating hours for the particular signal type.

### Deemed Measure Cost

The actual measure installation cost should be used (including material and labor).

### Deemed O&M Cost Adjustments<sup>479</sup>

Because LEDs last much longer than incandescent bulbs, LEDs offer operation and maintenance (O&M) savings over the life of the lamps for avoided replacement lamps and the labor to install them. The following assumptions are used to calculate the O&M savings:

Incandescent bulb cost: \$3 per bulb

Labor cost to replace incandescent lamp: \$60 per signal

Life of incandescent bulb: 8000 hours

### Coincidence Factor<sup>480</sup>

The summer peak coincidence factor (CF) for this measure is dependent on lamp type as below:

Lamp Type	CF
Red Balls, always changing or flashing	0.55
Red Arrows	0.90
Green Arrows	0.10
Green, always changing or flashing	0.43
Flashing Yellow	0.50
Yellow	0.02

<sup>478</sup> ACEEE, (1998) *A Market Transformation Opportunity Assessment for LED Traffic Signals*, <http://www.cce1.org/gov/led/led-ace3/ace3led.pdf>

<sup>479</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>480</sup> Ibid

Lamp Type	CF
“Hand” Don’t Walk Signal	0.75
“Man” Walk Signal	0.21

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (W_{\text{base}} - W_{\text{eff}}) \times \text{HOURS} / 1000$$

Where:

$W_{\text{base}}$	= The connected load of the baseline equipment = see Table ‘Traffic Signals Technology Equivalencies’
$W_{\text{eff}}$	= The connected load of the baseline equipment = see Table ‘Traffic Signals Technology Equivalencies’
EFLH	= annual operating hours of the lamp = see Table ‘Traffic Signals Technology Equivalencies’
1000	= conversion factor (W/kW)

For example, an 8 inch red, round signal:

$$\begin{aligned} \Delta \text{kWh} &= ((69 - 7) \times 4818) / 1000 \\ &= 299 \text{ kWh} \end{aligned}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (W_{\text{base}} - W_{\text{eff}}) \times \text{CF} / 1000$$

Where:

$W_{\text{base}}$	= The connected load of the baseline equipment = see Table ‘Traffic Signals Technology Equivalencies’
$W_{\text{eff}}$	= The connected load of the baseline equipment = see Table ‘Traffic Signals Technology Equivalencies’
CF	= Summer Peak Coincidence Factor for measure =

Lamp Type	CF
Red Balls, always changing or flashing	0.55
Red Arrows	0.90
Green Arrows	0.10
Green, always changing or flashing	0.43
Flashing Yellow	0.50
Yellow	0.02
“Hand” Don’t Walk Signal	0.75
“Man” Walk Signal	0.21

For example, an 8 inch red, round signal:

$$\Delta \text{kW} = ((69 - 7) \times 0.55) / 1000$$

$$= 0.0341 \text{ kW}$$

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Reference Tables

Traffic Signals Technology Equivalencies<sup>481</sup>

Traffic Fixture Type	Fixture Size and Color	Efficient Lamps	Baseline Lamps	HOURS	Efficient Fixture Wattage	Baseline Fixture Wattage	Energy Savings (in kWh)
Round Signals	8" Red	LED	Incandescent	4818	7	69	299
Round Signals	12" Red	LED	Incandescent	4818	6	150	694
Flashing Signal	8" Red	LED	Incandescent	4380	7	69	272
Flashing Signal	12" Red	LED	Incandescent	4380	6	150	631
Flashing Signal	8" Yellow	LED	Incandescent	4380	10	69	258
Flashing Signal	12" Yellow	LED	Incandescent	4380	13	150	600
Round Signals	8" Yellow	LED	Incandescent	175	10	69	10
Round Signals	12" Yellow	LED	Incandescent	175	13	150	24
Round Signals	8" Green	LED	Incandescent	3767	9	69	266
Round Signals	12" Green	LED	Incandescent	3767	12	150	520
Turn Arrows	8" Yellow	LED	Incandescent	701	7	116	76
Turn Arrows	12" Yellow	LED	Incandescent	701	9	116	75
Turn Arrows	8" Green	LED	Incandescent	701	7	116	76
Turn Arrows	12" Green	LED	Incandescent	701	7	116	76
Pedestrian Sign	12" Hand/Man	LED	Incandescent	8760	8	116	946

#### Reference specifications for above traffic signal wattages are from the following manufacturers:

1. 8" Incandescent traffic signal bulb: General Electric Traffic Signal Model 17325-69A21/TS
2. 12" Incandescent traffic signal bulb: General Electric Signal Model 35327-150PAR46/TS
3. Incandescent Arrows & Hand/Man Pedestrian Signs: General Electric Traffic Signal Model 19010-116A21/TS
4. 8" and 12" LED traffic signals: Leotek Models TSL-ES08 and TSL-ES12

<sup>481</sup> Technical Reference Manual for Pennsylvania Act 129 Energy Efficiency and Conservation Program and Act 213 Alternative Energy Portfolio Standards. Pennsylvania Public Utility Commission. May 2009

5. 8" LED Yellow Arrow: General Electric Model DR4-YTA2-01A
6. 8" LED Green Arrow: General Electric Model DR4-GCA2-01A
7. 12" LED Yellow Arrow: Dialight Model 431-3334-001X
8. 12" LED Green Arrow: Dialight Model 432-2324-001X
9. LED Hand/Man Pedestrian Sign: Dialight 430-6450-001X

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Light Tube Commercial Skylight (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

A tubular skylight which is 10” to 21” in diameter with a prismatic or translucent lens is installed on the roof of a commercial facility. The lens reflects light captured from the roof opening through a highly specular reflective tube down to the mounted fixture height. When in use, a light tube fixture resembles a metal halide fixture. Uses include grocery, school, retail and other single story commercial buildings.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a tubular skylight that concentrates and directs light from the roof to an area inside the facility.

### Definition of Baseline Equipment

The baseline equipment for this measure is a T8 Fluorescent Lamp with comparable luminosity. The specifications for the baseline lamp depend on the size of the Light Tube being installed. See Table ‘kW/fixture Calculation Table’ in the Reference Tables section for details.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings} = \text{kW}_f \times 2400$$

$$\text{Summer Coincident Peak kW Savings} = \text{NumFixtures} \times \text{kW}_f \times 0.75$$

### Deemed Lifetime of Efficient Equipment

The estimated useful life for a light tube commercial skylight is 10 years<sup>482</sup>

### Deemed Measure Cost

If available, actual incremental cost should be used. For analysis purposes, assume an incremental cost for a light tube commercial skylight is \$500<sup>483</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The coincidence factor for a light tube commercial skylight is 0.75. This was determined by taking the average of several building types for the 4p-5p peak period.<sup>484</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{kW}_f \times \text{EFLH}$$

Where:

$$\text{kW}_f = \text{kilowatts saved per fixture}$$

---

<sup>482</sup> Equal to the manufacturers standard warranty

<sup>483</sup> Based on a review of available manufacturer pricing information

<sup>484</sup> RLW Analytics. Coincidence Factor Study - Residential and Commercial Industrial Lighting Measures. Spring 2007.

EFLH = See table below  
 = equivalent full load hours  
 = 2400

For example, 3 light tubes installed:

$$\Delta \text{kWh} = 3 \times 0.129 \times 2400$$

$$= 928.8 \text{ kWh}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{NumFixtures} \times \text{kW}_f \times \text{CF}$$

Where:

$\Delta \text{kW}_f$  = kilowatts saved per fixture  
 = See table below  
 CF = coincidence factor  
 = 0.75  
 NumFixtures = number of fixtures being installed

For example, 3 light tubes installed:

$$\Delta \text{kW} = 3 \times 0.129 \times 0.75$$

$$= 0.29 \text{ kW}$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

kW/fixture Calculation Table:

Brand/size	Lumen Output <sup>485</sup>	Equivalent Fixture	kW	kWh
Solatube 21"	13,500-20,500	2-3LF32T8 172W	0.172	481.6
14"	6000-9100	1-3LF32T8	0.086	240.8
10"	3000-4600	3-18W quad	0.054	151.2
<b>AVERAGE</b>			<b>0.129</b>	<b>361.2</b>

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

<sup>485</sup> Solatube Test Report (2005). [http://www.maine绿色建筑.com/files/file/solatube/stb\\_lumens\\_datasheet.pdf](http://www.maine绿色建筑.com/files/file/solatube/stb_lumens_datasheet.pdf)

## ENERGY STAR Room Air Conditioner for Commercial Use (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the purchase and installation of a room air conditioning unit that meets either the ENERGY STAR<sup>486</sup> or Consortium for Energy Efficiency (CEE) Super-Efficient Home Appliances Initiative (SEHA) Tier 1<sup>487</sup> minimum qualifying efficiency specifications, in place of a baseline unit meeting minimum Federal Standard efficiency ratings. Applicable units are with and without louvered sides, without reverse cycle (i.e., heating), and casement.

### Definition of Efficient Equipment

To qualify for this measure the new room air conditioning unit must meet either the ENERGY STAR or CEE SEHA Tier 1 efficiency standards.

### Definition of Baseline Equipment

The baseline assumption is a new room air conditioning unit that meets the current minimum federal efficiency standard.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{CAP}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{EFLH}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{CAP}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * 0.74$$

### Deemed Lifetime of Efficient Equipment

The measure life is assumed to be 12 years<sup>488</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$40 for an ENERGY STAR unit and \$80 for a CEE TIER 1 unit<sup>489</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The coincidence factor for this measure is assumed to be 0.74<sup>490</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{CAP}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{EFLH}$$

---

<sup>486</sup> “ENERGY STAR Program Requirements for Room Air Conditioners, Partner Commitments”, U.S. Environmental Protection Agency, Accessed on 7/17/10. <

[http://www.energystar.gov/ia/partners/product\\_specs/program\\_reqs/room\\_air\\_conditioners\\_prog\\_req.pdf](http://www.energystar.gov/ia/partners/product_specs/program_reqs/room_air_conditioners_prog_req.pdf)>

<sup>487</sup> “CEE Super-Efficient Home Appliances Initiative – High-Efficiency Specifications for Room Air Conditioners”, Consortium for Energy Efficiency, Accessed on 7/17/10. <[http://www.cee1.org/resid/seha/rm-ac/rm-ac\\_specs.pdf](http://www.cee1.org/resid/seha/rm-ac/rm-ac_specs.pdf)>

<sup>488</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. <http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>489</sup> Based on field study conducted by Efficiency Vermont

<sup>490</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

Where:

CAP = cooling capacity of the unit in Btu/h  
 = Actual installed  
 EERbase = Energy Efficiency Ratio of the baseline equipment; see table below for default values.

Capacity (Btu/h)	Federal Standard with louvered sides (EER)	Federal Standard without louvered sides (EER)	Federal Standard Casement-Only (EER)	Federal Standard Casement-Slider (EER)
< 8,000	>= 9.7	>=9.0	>=8.7	>=9.5
8,000 to 13,999	>= 9.8	>=8.5	>=8.7	>=9.5
14,000 to 19,999	>=9.7	>=8.5	>=8.7	>=9.5
≥ 20,000	>=8.5	>=8.5	>=8.7	>=9.5

EERee = Energy Efficiency Ratio of the energy efficient equipment.  
 = Actual installed efficiency of the ENERGY STAR or CEE SEHA Tier 1 compliant unit. See table below for minimum requirements:

Capacity (Btu/h)	ENERGY STAR with louvered sides (EER)	CEE SEHA Tier 1 with louvered sides (EER)	ENERGY STAR without louvered sides (EER)	ENERGY STAR Casement-Only (EER)	ENERGY STAR Casement-Slider (EER)
< 8,000	>=10.7	>=11.2	>=9.9	>=9.6	>=10.5
8,000 to 13,999	>= 10.8	>=11.3	>=9.4	>=9.6	>=10.5
14,000 to 19,999	>=10.7	>=11.2	>=9.4	>=9.6	>=10.5
≥ 20,000	>=9.4	>=9.8	>=9.4	>=9.6	>=10.5

EFLH = cooling equivalent full load hours; see table below for default values:

City	Equivalent Full Load Hours Cooling (EFLH) <sup>491</sup>
Akron	801
Cincinnati	941
Cleveland	820
Columbus	910
Dayton	942
Mansfield	757
Toledo	813

### Summer Coincident Peak Demand Savings

$$\Delta kW = (CAP) * [(1/EERbase) - (1/EERee)] * CF$$

Where:

<sup>491</sup> Heating and cooling EFLH data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.



CF = Summer Peak Coincidence Factor for measure  
= 0.74<sup>492</sup>

**Fossil Fuel Impact Descriptions and Calculation**

n/a

**Water Impact Descriptions and Calculation**

n/a

**Deemed O&M Cost Adjustment Calculation**

n/a

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

**Referenced Documents:** “Draft TRM - C&I Buildings Model Development.doc”

---

<sup>492</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

## Single-Package and Split System Unitary Air Conditioners (Time of Sale, New Construction)

**Official Measure Code** (Measure Number: **X-X-X-X (Program name, End Use)**)

### Description

This measure promotes the installation of high-efficiency unitary air-, water-, and evaporatively cooled air conditioning equipment, both single-package and split systems. Air conditioning (AC) systems are a major consumer of electricity and systems that exceed baseline efficiencies can save considerable amounts of energy. This measure could apply to the replacing of an existing unit at the end of its useful life or the installation of a new unit in a new or existing building.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a high-efficiency air-, water-, or evaporatively cooled air conditioner that exceeds the energy efficiency requirements of the International Energy Conservation Code (IECC) 2006, Table 503.2.3(1).

### Definition of Baseline Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a standard-efficiency air-, water-, or evaporatively cooled air conditioner that meets the energy efficiency requirements of the International Energy Conservation Code (IECC) 2006, Table 503.2.3(1). The rating conditions for the baseline and efficient equipment efficiencies must be equivalent.

### Deemed Calculation for this Measure

For units with cooling capacities less than 65 kBtu/h:

$$\text{Annual kWh Savings} = (\text{kBtu/h}) * [(1/\text{SEER}_{\text{base}}) - (1/\text{SEER}_{\text{ee}})] * \text{EFLH}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{kBtu/h}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{CF}$$

For units with cooling capacities equal to or greater than 65 kBtu/h:

$$\text{Annual kWh Savings} = (\text{kBtu/h}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{EFLH}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{kBtu/h}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 15 years.<sup>493</sup>

### Deemed Measure Cost

The incremental capital cost for this measure is assumed to be \$100 per ton.<sup>494</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 74%.<sup>495</sup>

<sup>493</sup> Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, Inc., June 2007.

<sup>494</sup> Based on a review of TRM incremental cost assumptions from Vermont, Wisconsin, and California.

<sup>495</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

---



---

## REFERENCE SECTION

---



---

### Calculation of Savings

#### Energy Savings

For units with cooling capacities less than 65 kBtu/h:

$$\Delta \text{kWH} = (\text{kBtu/h}) * [(1/\text{SEER}_{\text{base}}) - (1/\text{SEER}_{\text{ee}})] * \text{EFLH}$$

For units with cooling capacities equal to or greater than 65 kBtu/h:

$$\Delta \text{kWH} = (\text{kBtu/h}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{EFLH}$$

Where:

kBtu/h = capacity of the cooling equipment actually installed in kBtu per hour (1 ton of cooling capacity equals 12 kBtu/h).

SEERbase = Seasonal Energy Efficiency Ratio of the baseline equipment; see table below for default values:

Equipment Type	Size Category	Subcategory	Baseline Efficiency <sup>496</sup>
Air conditioners, air cooled	<65,000 Btu/h	Split system	13.0 SEER <sup>a</sup>
		Single package	13.0 SEER <sup>a</sup>
	≥65,000 Btu/h and <135,000 Btu/h	Split system and single package	10.3 EER
	≥135,000 Btu/h and <240,000 Btu/h	Split system and single package	9.7 EER
	≥240,000 Btu/h and <760,000 Btu/h	Split system and single package	9.5 EER
	≥760,000 Btu/h	Split system and single package	9.2 EER
Air conditioners, Water and evaporatively cooled	<65,000 Btu/h	Split system and single package	12.1 EER
	≥65,000 Btu/h and <135,000 Btu/h	Split system and single package	11.5 EER
	≥135,000 Btu/h and <240,000 Btu/h	Split system and single package	11.0 EER
	≥240,000 Btu/h	Split system and single package	11.0 EER

a. As mandated by federal equipment manufacturing standards

<[http://www1.eere.energy.gov/buildings/appliance\\_standards/pdfs/74fr12058.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/pdfs/74fr12058.pdf)>

SEERee = Seasonal Energy Efficiency Ratio of the energy efficient equipment (actually installed).  
 EERbase = Energy Efficiency Ratio of the baseline equipment; see table above for default values.  
 Since IECC 2006 does not provide EER requirements for air-cooled air conditioners < 65 kBtu/h, assume the following conversion from SEER to EER: EER≈SEER/1.1.

<sup>496</sup> International Energy Conservation Code (IECC 2006) 2006, Table 503.2.3(1), Unitary Air Conditioners and Condensing Units, Electrically Operated, Minimum Efficiency Requirements, unless otherwise noted.

EER<sub>ee</sub> = Energy Efficiency Ratio of the energy efficient equipment. For air-cooled air conditioners < 65 kBtu/h, if the actual EER<sub>ee</sub> is unknown, assume the following conversion from SEER to EER: EER≈SEER/1.1.  
 = Actual installed  
 EFLH = cooling equivalent full load hours; see table below for default values:

City	Equivalent Full Load Hours Cooling (EFLH) <sup>497</sup>
Akron	801
Cincinnati	941
Cleveland	820
Columbus	910
Dayton	942
Mansfield	757
Toledo	813

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (BtuH * (1/EER_{base} - 1/EER_{ee}))/1000 * CF$$

Where:

CF = Summer Peak Coincidence Factor for measure  
 = 0.74<sup>498</sup>

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

**Referenced Documents:** “Draft TRM - C&I Buildings Model Development.doc”

<sup>497</sup> Heating and cooling EFLH data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

<sup>498</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

## Heat Pump Systems (Time of Sale, New Construction)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure applies to the installation of high-efficiency air cooled, water source, ground water source, and ground source heat pump systems. This measure could apply to replacing an existing unit at the end of its useful life, or installation of a new unit in a new or existing building.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a high-efficiency air cooled, water source, ground water source, or ground source heat pump system that exceeds the energy efficiency requirements of the International Energy Conservation Code (IECC) 2006, Table 503.2.3(2).

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a standard-efficiency air cooled, water source, ground water source, or ground source heat pump system that meets the energy efficiency requirements of the International Energy Conservation Code (IECC) 2006, Table 503.2.3(2). The rating conditions for the baseline and efficient equipment efficiencies must be equivalent.

### Deemed Calculation for this Measure

For units with cooling capacities less than 65 kBtu/h:

$$\text{Annual kWh Savings} = \text{Annual kWh Savings}_{\text{cool}} + \text{Annual kWh Savings}_{\text{heat}}$$

$$\text{Annual kWh Savings}_{\text{cool}} = (\text{kBtu/h}) * [(1/\text{SEER}_{\text{base}}) - (1/\text{SEER}_{\text{ee}})] * \text{EFLH}_{\text{cool}}$$

$$\text{Annual kWh Savings}_{\text{heat}} = (\text{kBtu/h}) * [(1/\text{HSPF}_{\text{base}}) - (1/\text{HSPF}_{\text{ee}})] * \text{EFLH}_{\text{heat}}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{kBtu/h}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{CF}$$

For units with cooling capacities equal to or greater than 65 kBtu/h:

$$\text{Annual kWh Savings} = \text{Annual kWh Savings}_{\text{cool}} + \text{Annual kWh Savings}_{\text{heat}}$$

$$\text{Annual kWh Savings}_{\text{cool}} = (\text{kBtu/h}_{\text{cool}}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{EFLH}_{\text{cool}}$$

$$\text{Annual kWh Savings}_{\text{heat}} = (\text{kBtu/h}_{\text{heat}})/3.412 * [(1/\text{COP}_{\text{base}}) - (1/\text{COP}_{\text{ee}})] * \text{EFLH}_{\text{heat}}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{kBtu/h}_{\text{cool}}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 15 years.<sup>499</sup>

### Deemed Measure Cost

For analysis purposes, the incremental capital cost for this measure is assumed as \$100 per ton for air-cooled units.<sup>500</sup> The incremental cost for all other equipment types should be determined on a site-specific basis.

<sup>499</sup> Measure Life Report: Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, Inc., June 2007.

<sup>500</sup> Based on a review of TRM incremental cost assumptions from Vermont, Wisconsin, and California.

## Deemed O&M Cost Adjustments

n/a

## Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 74%<sup>501</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

For units with cooling capacities less than 65 kBtu/h:

$$\Delta \text{kWh} = \text{Annual kWh Savings}_{\text{cool}} + \text{Annual kWh Savings}_{\text{heat}}$$

$$\text{Annual kWh Savings}_{\text{cool}} = (\text{kBtu/h}_{\text{cool}}) * [(1/\text{SEER}_{\text{base}}) - (1/\text{SEER}_{\text{ee}})] * \text{EFLH}_{\text{cool}}$$

$$\text{Annual kWh Savings}_{\text{heat}} = (\text{kBtu/h}_{\text{cool}}) * [(1/\text{HSPF}_{\text{base}}) - (1/\text{HSPF}_{\text{ee}})] * \text{EFLH}_{\text{heat}}$$

For units with cooling capacities equal to or greater than 65 kBtu/h:

$$\Delta \text{kWh} = \text{Annual kWh Savings}_{\text{cool}} + \text{Annual kWh Savings}_{\text{heat}}$$

$$\text{Annual kWh Savings}_{\text{cool}} = (\text{kBtu/h}_{\text{cool}}) * [(1/\text{EER}_{\text{base}}) - (1/\text{EER}_{\text{ee}})] * \text{EFLH}_{\text{cool}}$$

$$\text{Annual kWh Savings}_{\text{heat}} = (\text{kBtu/h}_{\text{heat}})/3.412 * [(1/\text{COP}_{\text{base}}) - (1/\text{COP}_{\text{ee}})] * \text{EFLH}_{\text{heat}}$$

Where:

$\text{kBtu/h}_{\text{cool}}$  = capacity of the cooling equipment in kBtu per hour (1 ton of cooling capacity equals 12 kBtu/h).  
= Actual installed  
 $\text{SEER}_{\text{base}}$  = Seasonal Energy Efficiency Ratio of the baseline equipment; see table below for values.

Equipment Type	Size Category (Cooling Capacity)	Subcategory or Rating Condition	Baseline Efficiency (Cooling Mode) <sup>502</sup>	Baseline Efficiency (Heating Mode) <sup>503</sup>
Air cooled	<65,000 Btu/h	Split system	13.0 SEER <sup>a</sup>	7.7 HSPF <sup>a</sup>
		Single package	13.0 SEER <sup>a</sup>	7.7 HSPF <sup>a</sup>
	≥65,000 Btu/h and <135,000 Btu/h	Split system and single package / 47°F db/43°F wb outdoor air	10.1 EER	3.2 COP
	≥135,000 Btu/h and <240,000 Btu/h	Split system and single package / 47°F db/43°F wb outdoor air	9.3 EER	3.1 COP

<sup>501</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Verification of this factor is pending information from the utilities.

<sup>502</sup> International Energy Conservation Code (IECC 2006) 2006, Table 503.2.3(2), Unitary And Applied Heat Pumps, Electrically Operated, Minimum Efficiency Requirements, unless otherwise noted.

<sup>503</sup> Ibid.

Equipment Type	Size Category (Cooling Capacity)	Subcategory or Rating Condition	Baseline Efficiency (Cooling Mode) <sup>502</sup>	Baseline Efficiency (Heating Mode) <sup>503</sup>
	≥240,000 Btu/h	Split system and single package / 47°F db/43°F wb outdoor air	9.0 EER	3.1 COP
Water source	<17,000 Btu/h	86°F entering water (Cooling Mode) / 68°F entering water (Heating Mode)	11.2 EER	4.2 COP
	≥17,000 Btu/h and <135,000 Btu/h	86°F entering water / 68°F entering water (Heating Mode)	12.0 EER	4.2 COP
Groundwater source	<135,000 Btu/h	59°F entering water (Cooling Mode) / 50°F entering water (Heating Mode)	16.2 EER	3.6 COP
Ground source	<135,000 Btu/h	77°F entering water / 32°F entering water (Heating Mode)	13.4 EER	3.1 COP

a. As mandated by federal equipment manufacturing standards  
[http://www1.eere.energy.gov/buildings/appliance\\_standards/pdfs/74fr12058.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/pdfs/74fr12058.pdf)

SEER<sub>ee</sub> = Seasonal Energy Efficiency Ratio of the energy efficient equipment.  
= Actual installed

EFLH<sub>cool</sub> = cooling mode equivalent full load hours; see table below for default values:

City	Equivalent Full Load Hours Cooling (EFLH <sub>cool</sub> )	Equivalent Full Load Hours Heating (EFLH <sub>heat</sub> ) <sup>504</sup>
Akron	801	994
Cincinnati	941	713
Cleveland	820	994
Columbus	910	829
Dayton	942	810
Mansfield	757	919
Toledo	813	1,056

HSPF<sub>base</sub> = Heating Seasonal Performance Factor of the baseline equipment; see table above for values.

HSPF<sub>ee</sub> = Heating Seasonal Performance Factor of the energy efficient equipment.  
= Actual installed

EFLH<sub>heat</sub> = heating mode equivalent full load hours; see table above for default values.

EER<sub>base</sub> = Energy Efficiency Ratio of the baseline equipment; see the table above for values.  
Since IECC 2006 does not provide EER requirements for air-cooled heat pumps < 65 kBtu/h, assume the following conversion from SEER to EER: EER≈SEER/1.1.

<sup>504</sup> Heating and cooling EFLH data based on a series of prototypical small commercial building simulation runs. Values shown are weighted averages across fast food restaurant, full service restaurant, assembly, big box retail, small retail, small office, light industrial and school building models. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

EER <sub>ee</sub>	= Energy Efficiency Ratio of the energy efficient equipment. For air-cooled air conditioners < 65 kBtu/h, if the actual EER <sub>ee</sub> is unknown, assume the following conversion from SEER to EER: EER≈SEER/1.1. = Actual installed
kBtu/h <sub>heat</sub>	= capacity of the heating equipment in kBtu per hour. = Actual installed
3.412	= Btu per Wh.
COP <sub>base</sub>	= coefficient of performance of the baseline equipment; see table above for values.
CO <sub>pee</sub>	= coefficient of performance of the energy efficient equipment. = Actual installed

### Summer Coincident Peak Demand Savings

$$\Delta kW = (kBtu/h_{cool}) * [(1/EER_{base}) - (1/EER_{ee})] * CF$$

Where:

$$CF = \text{Summer Peak Coincidence Factor for measure} = 0.74^{505}$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

**Referenced Documents:** “Draft TRM - C&I Buildings Model Development.doc”

<sup>505</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Verification of these factors pending information from the utilities.



## Outside Air Economizer with Dual-Enthalpy Sensors (Time of Sale, Retrofit – New Equipment)

**Official Measure Code** (Measure Number: X-X-X-X (Efficient Products, Lighting End Use))

### Description

This measure is to upgrade the outside air dry-bulb economizer to a dual enthalpy controlled economizer. The new control system will continuously monitor the enthalpy of both outside air and return air. The system will control the system dampers and adjust based on the two readings.

### Definition of Efficient Equipment

The efficient equipment is a dual-enthalpy economizer on the HVAC system.

### Definition of Baseline Equipment

The existing condition for this measure is an outside air dry-bulb economizer.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{TONS} \times \Delta \text{kWh}_{\text{ton}}$$

$$\text{Summer Coincident Peak kW Savings} = 0$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 10 years<sup>506</sup>.

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$400<sup>507</sup>

### Deemed O&M Cost Adjustments

There are no expected O&M cost adjustments for this measure.

### Coincidence Factor

There are no expected summer peak kW savings for this measure, so the coincidence factor is 0.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{TONS} \times \Delta \text{kWh}_{\text{ton}}$$

Where:

TONS = the rated capacity of the unit controlled by the economizer. To be collected with the application.  
 $\Delta \text{kWh}_{\text{ton}}$  = the kWh savings per ton, based on region of the state. See table below in the “Reference Table” section.

---

<sup>506</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008

<sup>507</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010. Value derived from Efficiency Vermont project experience and conversations with suppliers.

For example, an economizer on a 10 ton air conditioning unit in a big box retail building in Cleveland:

$$\begin{aligned}\Delta kWh &= 10 \times 145 \\ &= 1,450 \text{ kWh}\end{aligned}$$

#### Summer Coincident Peak Demand Savings

$$\Delta kW = 0$$

#### Baseline Adjustment

There are no expected future code changes to affect this measure.

#### Fossil Fuel Impact Descriptions and Calculation

There are no expected fossil fuel impacts associated with this measure.

#### Deemed O&M Cost Adjustment Calculation

There are no expected O&M costs or savings associated with this measure.

#### Reference Table

#### Dual Enthalpy Economizer Savings<sup>508</sup>

Building Type	City	$\Delta kWh_{ton}$	$\Delta kW_{ton}$	$\Delta MMBtu_{ton}$
Assembly	Akron	23	0.0	0.0
	Cincinnati	28	0.0	0.0
	Cleveland	27	0.0	0.0
	Columbus	28	0.0	0.0
	Dayton	23	0.0	0.0
	Mansfield	29	0.0	0.0
	Toledo	28	0.0	0.0
Big Box Retail	Akron	148	0.0	0.0
	Cincinnati	144	0.0	0.0
	Cleveland	145	0.0	0.0
	Columbus	157	0.0	0.0
	Dayton	143	0.0	0.0
	Mansfield	157	0.0	0.0
	Toledo	145	0.0	0.0
Fast Food Restaurant	Akron	35	0.0	0.0
	Cincinnati	32	0.0	0.0
	Cleveland	34	0.0	0.0
	Columbus	39	0.0	0.0
	Dayton	33	0.0	0.0
	Mansfield	37	0.0	0.0
	Toledo	35	0.0	0.0
Full-Service Restaurant	Akron	20	0.0	0.0
	Cincinnati	18	0.0	0.0
	Cleveland	20	0.0	0.0

<sup>508</sup> Unit energy, demand, and gas savings data is based on a series of prototypical small commercial building simulation runs. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

Building Type	City	$\Delta kWh_{ton}$	$\Delta kW_{ton}$	$\Delta MMBtu_{ton}$
	Columbus	23	0.0	0.0
	Dayton	20	0.0	0.0
	Mansfield	22	0.0	0.0
	Toledo	19	0.0	0.0
Light Industrial	Akron	36	0.0	0.0
	Cincinnati	43	0.0	0.0
	Cleveland	39	0.0	0.0
	Columbus	43	0.0	0.0
	Dayton	35	0.0	0.0
	Mansfield	37	0.0	0.0
	Toledo	42	0.0	0.0
Primary School	Akron	51	0.0	0.0
	Cincinnati	57	0.0	0.0
	Cleveland	52	0.0	0.0
	Columbus	55	0.0	0.0
	Dayton	52	0.0	0.0
	Mansfield	53	0.0	0.0
	Toledo	49	0.0	0.0
Small Office	Akron	191	0.0	0.0
	Cincinnati	185	0.0	0.0
	Cleveland	184	0.0	0.0
	Columbus	206	0.0	0.0
	Dayton	189	0.0	0.0
	Mansfield	191	0.0	0.0
	Toledo	194	0.0	0.0
Small Retail	Akron	122	0.0	0.0
	Cincinnati	115	0.0	0.0
	Cleveland	117	0.0	0.0
	Columbus	129	0.0	0.0
	Dayton	117	0.0	0.0
	Mansfield	124	0.0	0.0
	Toledo	116	0.0	0.0

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

**Referenced Documents:** “Draft TRM - C&I Buildings Model Development.doc”

## Chilled Water Reset Controls (Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, Lighting End Use)**)

### Description

This section covers installation of chilled water reset controls in large commercial buildings with built-up HVAC systems. Reset controls allow the chillers to operate at a higher chilled water temperature during periods of low cooling loads. The baseline condition is assumed to be constant chilled water temperature of 45°F. The reset strategies use a 5°F reset<sup>509</sup>. Energy savings are realized through improved chiller efficiency. Data for both air-cooled and water-cooled chillers are shown. The approach utilizes DOE-2.2 simulations on a series of commercial prototypical building models. The commercial simulation models are adapted from the California Database for Energy Efficiency Resources (DEER) study, with changes to reflect Ohio climate and building practices. Energy and demand impacts are normalized per ton of chiller capacity controlled.

### Definition of Efficient Equipment

The efficient condition is a chilled water reset, with the maximum chilled water temperature of 50°F.

### Definition of Baseline Equipment

The baseline condition is a fixed chilled water temperature of 45°F.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{TONS} \times \Delta \text{kWh}_{\text{ton}}$$

$$\text{Summer Coincident Peak kW Savings} = \text{TONS} \times \Delta \text{kW}_{\text{ton}}$$

$$\text{Annual MMBTU Savings} = \text{TONS} \times \Delta \text{MMBtu}_{\text{ton}}$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 10 years<sup>510</sup>.

### Deemed Measure Cost

The full installed cost for this measure is \$681.34 per control<sup>511</sup>.

### Deemed O&M Cost Adjustments

There are no expected O&M cost adjustments for this measure.

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 74%<sup>512</sup>.

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

<sup>509</sup> ASHRAE 90.1 2004 requires chilled and hot water temperature reset for systems with a capacity greater than 300,000 BTU/h. To avoid incenting code, this characterization should apply to smaller systems and retrofits only.

<sup>510</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008

<sup>511</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010. Value derived from Efficiency Vermont project experience and conversations with suppliers.

<sup>512</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Verification of this factor is pending information from the utilities.

## Energy Savings

$$\Delta \text{kWh} = \text{TONS} \times \Delta \text{kWh}_{\text{ton}}$$

Where:

TONS = the rated capacity of the unit controlled by the economizer. To be collected with the application.  
 $\Delta \text{kWh}_{\text{ton}}$  = the kWh savings per ton, this depends on whether the chiller is air-cooled or water-cooled. See table below.

For example, chilled water reset on a 10-ton constant volume air-cooled chiller in Cleveland:

$$\begin{aligned}\Delta \text{kWh} &= 10 \times 13 \\ &= 130 \text{ kWh}\end{aligned}$$

## Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{TONS} \times \Delta \text{kW}_{\text{ton}} \times \text{CF}$$

Where:

$\Delta \text{kW}_{\text{ton}}$  = the kW savings per ton, this depends on whether the chiller is air-cooled or water-cooled. See table below.  
CF = The summer coincident peak factor, or 0.74.

For example, chilled water reset on a 10-ton constant volume air-cooled chiller in Cleveland:

$$\begin{aligned}\Delta \text{kW} &= 10 \times (-0.012) \times 0.74 \\ &= -0.089 \text{ kW}\end{aligned}$$

## Baseline Adjustment

There are no expected future code changes to affect this measure.

## Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = \text{TONS} \times \Delta \text{MMBtu}_{\text{ton}}$$

Where:

$\Delta \text{MMBtu}_{\text{ton}}$  = the gas savings per ton, this depends on whether the chiller is air-cooled or water-cooled. See table below.

For example, chilled water reset on a 10-ton constant volume air-cooled chiller in Cleveland:

$$\begin{aligned}\Delta \text{MMBtu} &= 10 \times 0.08 \\ &= 0.8 \text{ MMBtu}\end{aligned}$$

## Deemed O&M Cost Adjustment Calculation

There are no expected O&M costs or savings associated with this measure.

## Reference Tables

**Table 9: Chilled water reset controls<sup>513</sup>**

System Type	City	$\Delta kWh_{ton}$	$\Delta kW_{ton}$	$\Delta MMBtu_{ton}$
Air-Cooled Chiller with Constant Volume Reheat	Akron	17	-0.009	0.11
	Cincinnati	13	-0.009	0.11
	Cleveland	13	-0.012	0.08
	Columbus	13	-0.011	0.10
	Dayton	14	-0.037	0.12
	Mansfield	19	-0.028	0.16
	Toledo	16	0.006	0.12
Air-Cooled Chiller with Variable Air Volume Reheat	Akron	10	-0.011	0.04
	Cincinnati	10	-0.010	0.04
	Cleveland	11	-0.012	0.03
	Columbus	11	-0.010	0.07
	Dayton	11	-0.009	0.05
	Mansfield	11	-0.012	0.04
	Toledo	11	0.011	0.07
Water-Cooled Chiller with Constant Volume Reheat	Akron	38	0.004	0.11
	Cincinnati	31	-0.012	0.11
	Cleveland	34	-0.008	0.08
	Columbus	31	0.004	0.10
	Dayton	34	-0.016	0.12
	Mansfield	41	-0.015	0.16
	Toledo	36	0.004	0.12
Water-Cooled Chiller with Variable Air Volume Reheat	Akron	27	0.004	0.04
	Cincinnati	26	-0.002	0.04
	Cleveland	28	-0.008	0.03
	Columbus	27	0.003	0.07
	Dayton	29	-0.015	0.05
	Mansfield	29	-0.004	0.04
	Toledo	29	0.059	0.07

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

**Referenced Documents:** “Draft TRM - C&I Buildings Model Development.doc”

<sup>513</sup> Unit energy, demand, and gas savings data is based on a series of prototypical small commercial building simulation runs. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

## Variable Frequency Drives for HVAC Applications (Time of Sale, Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, Lighting End Use)**)

### Description

A variable frequency drive installed on an HVAC system pump or fan motor. The VFD will modulate the speed of the motor when it is not needed to run at full load. Since the power of the motor is proportional to the cube of the speed, this will result in significant energy savings.

### Definition of Efficient Equipment

The efficient condition is a variable frequency drive on an HVAC system pump or fan motor.

### Definition of Baseline Equipment

For VFDs on fans, the baseline is chosen from the reference table below. For VFDs on pumps, the baseline is a constant volume motor.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{BHP} / \eta_{\text{motor}} \times \text{HOURS} \times \text{ESF}$$

$$\text{Summer Coincident Peak kW Savings} = \text{BHP} / \eta_{\text{motor}} \times \text{DSF}$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 15 years.<sup>514</sup>

### Deemed Measure Cost

See table below<sup>515</sup>

HP	Total Installed Cost
5	\$1,330
7.5	\$1,622
10	\$1,898
15	\$2,518
20	\$3,059

### Deemed O&M Cost Adjustments

There are no expected O&M savings associated with this measure.

### Coincidence Factor

The demand savings factor (DSF) is already based upon coincident savings, and thus there is no additional coincidence factor for this characterization.

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

### Energy Savings

<sup>514</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008

<sup>515</sup> Equipment Costs from Granger 2008 Catalog pp. 286-289, average across available voltages and models. Labor costs from RSMeans Mechanical Cost Data, 2008. Used average cost adjustment for all cities listed in Ohio. See ‘OH VFD cost analysis.xls’

$$\Delta \text{kWh} = \text{BHP} / \eta_{\text{motor}} \times \text{HOURS} \times \text{ESF}$$

Where:

BHP = The brake horsepower of the motor. To be collected with the application.

$\eta_{\text{motor}}$  = Efficiency of the motor that is driven by the VFD. To be collected with the application.

HOURS = The hours of operation for the motor. Default hours shown in table below.

Application	HOURS <sup>516</sup>
Hot water pump	6000
Chilled Water pump	1,852
Fans	3,985

ESF = Energy Savings Factor. See table in reference section.

For example, a VFD on a 5 BHP chilled water pump with 95% efficiency would see energy savings of:

$$\begin{aligned} \Delta \text{kWh} &= (5 / 0.95 * 1,852 * 0.432) \\ &= 4,211 \text{ kWh} \end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{BHP} / \eta_{\text{motor}} \times \text{DSF}$$

Where:

DSF = Demand Savings Factor. See table in reference section

For example, a VFD on a 5 BHP chilled water pump with 95% efficiency would see peak demand savings of:

$$\begin{aligned} \Delta \text{kW} &= (5 / 0.95 * 0.299) \\ &= 1.57 \text{ kW} \end{aligned}$$

### Baseline Adjustment

There are no expected code changes in the future.

### Fossil Fuel Impact Descriptions and Calculation

There are no expected fossil fuel impacts for this measure.

### Deemed O&M Cost Adjustment Calculation

There are no expected O&M savings associated with this measure.

### Reference Tables

#### HVAC Fan VFD Savings Factors<sup>517</sup>

Baseline	ESF	DSF
Constant Volume	0.535	0.348
Air foil / backward inlet	0.354	0.26
Air foil inlet guide vanes	0.227	0.13
Forward curved	0.179	0.136
Forward curved inlet guide vanes	0.092	0.03

<sup>516</sup> CL&P and UI Program Savings Documentation for 2008 Program Year. Average of hours across all building types.

<sup>517</sup> Ibid.



## HVAC Pump VFD Savings Factors<sup>518</sup>

System	ESF	DSF
Chilled water pump	0.432	0.299
Hot water pump	0.482	0

## Ohio VFD Cost Analysis

HP	Altivar 61 (3-phase, 208-240 VAC, 50/60 Hz)	Altivar 61 (3-phase, 400-480 VAC, 50/60 Hz)	AC Adjustable-Frequency Drive (3-phase, 200-230 VAC, 60/50 Hz)	AC Adjustable-Frequency Drive (3-phase, 380-460 VAC, 60/50 Hz)	AF-300 P11 (3-phase, 200-230 VAC, 60/50 Hz)	AF-300 P11 (3-phase, 380-480 VAC, 60/50 Hz)	Altivar 31 (3-phase, 208-240 VAC, 50/60 Hz)	Altivar 31 (3-phase, 400-460 VAC, 50/60 Hz)	Average VFD Cost	Labor Hours	Labor Cost	Total Installed Cost*
5		1021	621	1022	1067	1369	637	675	\$ 916	10	\$ 413.62	\$ 1,330
7.5		1146	1081	1297	1186	1521	824.5	843.5	\$ 1,128	11.94	\$ 493.87	\$ 1,622
10		1392	1342	1685	1484	1898	993	1032	\$ 1,404	11.94	\$ 493.87	\$ 1,898
15	1647	1530	1649	2125	1800	2310		1359	\$ 1,774	17.978	\$ 743.61	\$ 2,518
20	2067	1901	2205	2849	2407	3090		1687	\$ 2,315	17.978	\$ 743.61	\$ 3,059
25	2410	2288	2668	3490	3038	3870			\$ 2,961	23.881	\$ 987.77	\$ 3,948

Source: Grainger 2008 Catalog pp.286-289

\* Jump in price at 15 stems from the RSMMeans assumption that VFDs of this size and greater will require 2 electricians for installation

Source: RSMMeans Mechanical Cost Data 2008

Labor Rate	45.55 \$/hr
Ohio Average City	
Location Factor	90.8
Columbus	89.2
Marion	85.3
Toledo	101
Zanesville	84.5
Steubenville	93.5
Lorain	95.4
Cleveland	104.2
Akron	96.2
Youngstown	91.8
Hamilton	87
Cincinnati	89
Dayton	88.1
Springfield	88.2
Chillicothe	94.2
Athens	77.6
Lima	87.7
<b>Average</b>	<b>90.8</b>

Analysis prepared by M.Socks, Optimal Energy Inc.  
Jul-10

## Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>518</sup> Ibid.

## Cool Roof (Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, Lighting End Use)**)

### Description

This section covers installation of “cool roof” roofing materials in commercial buildings. The cool roof is assumed to have a solar absorptance of 0.3<sup>519</sup> compared to a standard roof with solar absorptance of 0.8<sup>520</sup>. Energy and demand saving are realized through reductions in the building cooling loads. The approach utilizes DOE-2.2 simulations on a series of commercial prototypical building models. Energy and demand impacts are normalized per thousand square feet of roof space.

### Definition of Efficient Equipment

The efficient condition is a roof with a solar absorptance of 0.30.

### Definition of Baseline Equipment

The baseline condition is a roof with a solar absorptance of 0.80

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{SF} / 1000 * \Delta \text{kWh}_{\text{kSF}}$$

$$\text{Summer Coincident Peak kW Savings} = \text{SF} / 1000 * \Delta \text{kW}_{\text{kSF}} \times 0.74$$

$$\text{Annual MMBtu Increase} = \text{SF} / 1000 * \Delta \text{MMBtu}_{\text{kSF}}$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 15 years<sup>521</sup>.

### Deemed Measure Cost

The full installed cost for retrofit applications is \$8,454.67 per one thousand square feet (kSF)<sup>522</sup>.

### Deemed O&M Cost Adjustments

There are no expected O&M cost adjustments for this measure.

### Coincidence Factor

The coincidence factor is 0.74<sup>523</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{SF} / 1000 * \Delta \text{kWh}_{\text{kSF}}$$

---

<sup>519</sup> Maximum value to meet Cool Roof standards under California’s Title 24

<sup>520</sup> Itron. 2004-2005 Database for Energy Efficiency Resources (DEER) Update Study. December 2005.

<sup>521</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008

<sup>522</sup> 2005 Database for Energy-Efficiency Resources (DEER), Version 2005.2.01, “Technology and Measure Cost Data”, California Public Utilities Commission, October 26, 2005

<sup>523</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

Where:

SF = The square footage of the roof. To be collected with the incentive form.  
 $\Delta kWh_{kSF}$  = unit energy savings per 100 square feet of roof. See lookup table below.

For example, an assembly building in Dayton with 1,000 square feet of roof:

$$\begin{aligned}\Delta kWh &= 1,000 / 1,000 * 184 \\ &= 192 \text{ kWh}\end{aligned}$$

### Summer Coincident Peak Demand Savings

$$\Delta kW = SF / 1000 * \Delta kW_{kSF} \times CF$$

Where:

$\Delta kW_{kSF}$  = unit demand savings per 1,000 square foot of roof area. This can be found in the table below.  
CF = The summer coincident peak factor, or 0.74.

For example, an assembly building in Dayton with 1,000 square feet of roof:

$$\begin{aligned}\Delta kW &= 1,000 / 1,000 * 0.165 * 0.74 \\ &= 0.122 \text{ kW}\end{aligned}$$

### Baseline Adjustment

There are no expected future code changes to affect this measure.

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta MMBtu = SF / 1000 * \Delta MMBtu_{kSF}$$

Where:

$\Delta MMBtu_{kSF}$  = unit gas savings per 1000 square feet of roof space. See lookup table below.

For example, an assembly building in Dayton with 1,000 square feet of roof:

$$\begin{aligned}\Delta MMBtu &= 1,000 / 1,000 * -1.54 \\ &= -1.54 \text{ MMBtu}\end{aligned}$$

### Deemed O&M Cost Adjustment Calculation

There are no expected O&M costs or savings associated with this measure.

### Reference Tables

Cool Roof <sup>524</sup>				
Building Type	City	$\Delta kWh_{kSF}$	$\Delta kWh_{kSF}$	$\Delta MMBtu_{kSF}$
Assembly	Akron	150	0.091	-1.54
	Cincinnati	199	0.141	-1.47
	Cleveland	153	0.044	-1.56
	Columbus	176	0.050	-1.87

<sup>524</sup> Unit energy, demand, and gas savings data is based on a series of prototypical small commercial building simulation runs. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

Building Type	City	$\Delta kWh_{kSF}$	$\Delta kWh_{kSF}$	$\Delta MMBtu_{kSF}$
	Dayton	184	0.165	-1.54
	Mansfield	143	0.029	-1.59
	Toledo	155	0.021	-1.62
Big Box Retail	Akron	149	0.098	-1.06
	Cincinnati	184	0.124	-0.99
	Cleveland	147	0.093	-1.08
	Columbus	173	0.120	-1.21
	Dayton	174	0.112	-1.01
	Mansfield	145	0.112	-1.11
	Toledo	159	0.099	-1.12
Fast Food Restaurant	Akron	141	0.100	-2.10
	Cincinnati	183	0.050	-2.40
	Cleveland	137	0.050	-2.55
	Columbus	164	0.000	-2.35
	Dayton	163	0.100	-2.25
	Mansfield	136	0.100	-2.20
	Toledo	140	0.050	-2.70
Full-Service Restaurant	Akron	191	0.175	-1.75
	Cincinnati	145	0.150	-1.85
	Cleveland	145	0.075	-1.85
	Columbus	171	0.125	-1.93
	Dayton	171	0.175	-1.85
	Mansfield	136	0.125	-1.88
	Toledo	158	0.150	-1.93
Light Industrial	Akron	95	0.116	-1.69
	Cincinnati	126	0.083	-1.78
	Cleveland	99	0.078	-1.69
	Columbus	106	0.085	-1.91
	Dayton	108	0.101	-1.83
	Mansfield	84	0.146	-1.74
	Toledo	105	0.105	-1.73
Primary School	Akron	206	0.500	-2.86
	Cincinnati	322	0.668	-3.00
	Cleveland	230	0.502	-2.96
	Columbus	241	0.570	-3.30
	Dayton	284	0.508	-3.00
	Mansfield	189	0.324	-3.09
	Toledo	237	0.456	-3.01
Small Office	Akron	148	0.080	-0.98
	Cincinnati	190	0.100	-0.94
	Cleveland	148	0.060	-1.02
	Columbus	175	0.080	-1.06
	Dayton	173	0.020	-0.98
	Mansfield	143	0.080	-1.06
	Toledo	166	0.080	-1.00
Small Retail	Akron	173	0.141	-1.50
	Cincinnati	173	0.141	-1.50

Building Type	City	$\Delta kWh_{kSF}$	$\Delta kWh_{kSF}$	$\Delta MMBtu_{kSF}$
	Cleveland	169	0.078	-1.53
	Columbus	190	0.109	-1.77
	Dayton	194	0.156	-1.64
	Mansfield	154	0.094	-1.67
	Toledo	178	0.109	-1.69

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

## Commercial Window Film (Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, HVAC End Use)**)

### Description

This section covers installation of reflective window film in commercial buildings. The baseline condition is assumed to be double pane clear glass with a solar heat gain coefficient (SHGC) of 0.73 and U-value of 0.72 Btu/hr-SF-deg F. The window film is assumed to provide a SHGC of 0.40 or less. Energy and demand savings are realized through reductions in the building cooling loads. The approach utilizes DOE-2.2 simulations on a series of commercial prototypical building models. The commercial simulation models are adapted from the California Database for Energy Efficiency Resources (DEER), with changes to reflect Ohio climate and building practices. Energy and demand impacts are normalized per 100 square feet of window.

### Definition of Efficient Equipment

The efficient condition is double pane clear glass windows with a standard window film. The standard window film will lower the SHGC to 0.40.

### Definition of Baseline Equipment

The baseline condition is double pane clear glass windows without any window film, with a U-value of 0.72, and a SHGC of 0.73.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{SF} / 100 * \Delta \text{kWh}_{100\text{SF}}$$

$$\text{Summer Coincident Peak kW Savings} = \text{SF} / 100 * \Delta \text{kW}_{100\text{SF}} * 0.74$$

$$\text{Annual MMBtu Increase} = \text{SF} / 100 * \Delta \text{MMBtu}_{100\text{SF}}$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 10 years<sup>525</sup>.

### Deemed Measure Cost

This is a retrofit only measure. Actual installed cost should be use, but for analysis purposes, the full installed cost including labor is assumed as \$267 per 100 square feet of window<sup>526</sup>.

### Deemed O&M Cost Adjustments

There are no expected O&M savings associated with this measure

### Coincidence Factor

The summer peak coincidence factor for this measure is 74%<sup>527</sup>.

---

<sup>525</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008

<sup>526</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Cost Values and Summary Documentation”, California Public Utilities Commission, December 16, 2008

<sup>527</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta kWh = SF / 100 * \Delta kWh_{100SF}$$

Where:

SF = glazing surface area of installed window film, not including frame (square feet)

$\Delta kWh_{100SF}$  = unit energy savings per 100 square feet of window film. See lookup table below.

#### Summer Coincident Peak Demand Savings

$$\Delta kW = SF / 100 * \Delta kW_{100SF} * CF$$

Where:

$\Delta kW_{100SF}$  = unit demand savings per 100 square feet of window film. See lookup table below.

CF = summer coincident peak factor  
= 0.74

#### Baseline Adjustment

Since this is a retrofit measure that only applies to existing buildings with clear, double pane windows, future code adjustments should not affect projected savings.

#### Fossil Fuel Impact Descriptions and Calculation

$$\Delta MMBtu = SF / 100 * \Delta MMBtu_{100SF}$$

Where:

$\Delta MMBtu_{100SF}$  = unit heating energy savings per 100 square feet of window film. See lookup table above.

#### Deemed O&M Cost Adjustment Calculation

There are no expected O&M savings or costs associated with this measure.

### Reference Tables

**Table 10: Window Film**<sup>528</sup>

Building Type	City	$\Delta kWh_{100SF}$	$\Delta kW_{100SF}$	$\Delta MMBtu_{100SF}$
Assembly	Akron	309	0.16	-4.4
	Cincinnati	404	0.14	-4.0
	Cleveland	347	0.15	-4.2
	Columbus	316	0.05	-5.1
	Dayton	349	0.16	-4.7

---

<sup>528</sup> Unit energy, demand, and gas savings data is based on a series of prototypical small commercial building simulation runs. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

Building Type	City	$\Delta kWh_{100SF}$	$\Delta kW_{100SF}$	$\Delta MMBtu_{100SF}$
	Mansfield	292	0.05	-4.8
	Toledo	285	0.04	-5.4
Big Box Retail	Akron	298	0.19	-3.2
	Cincinnati	350	0.15	-3.3
	Cleveland	310	0.16	-3.2
	Columbus	304	0.12	-3.6
	Dayton	333	0.18	-3.5
	Mansfield	287	0.17	-4.1
	Toledo	303	0.14	-3.8
Fast Food Restaurant	Akron	240	0.19	-5.2
	Cincinnati	292	0.14	-5.4
	Cleveland	254	0.14	-5.1
	Columbus	259	0.07	-5.1
	Dayton	272	0.15	-5.2
	Mansfield	235	0.17	-5.7
	Toledo	237	0.12	-6.0
Full Service Restaurant	Akron	220	0.19	-7.5
	Cincinnati	281	0.17	-7.1
	Cleveland	236	0.19	-6.9
	Columbus	255	0.17	-6.6
	Dayton	264	0.19	-7.2
	Mansfield	222	0.19	-7.3
	Toledo	227	0.19	-7.9
Light Industrial	Akron	197	0.20	-4.1
	Cincinnati	225	0.14	-4.6
	Cleveland	222	0.07	-3.9
	Columbus	160	0.14	-4.6
	Dayton	230	0.14	-4.1
	Mansfield	172	0.23	-4.4
	Toledo	181	0.14	-4.4
Primary School	Akron	345	0.18	-7.2
	Cincinnati	452	0.20	-7.8
	Cleveland	399	0.17	-7.2
	Columbus	352	0.17	-7.6
	Dayton	416	0.20	-7.7
	Mansfield	329	0.06	-8.0
	Toledo	357	0.15	-7.8
Small Office	Akron	245	0.14	-2.7
	Cincinnati	304	0.14	-2.5
	Cleveland	258	0.12	-2.7
	Columbus	271	0.12	-2.6
	Dayton	282	0.09	-2.7
	Mansfield	247	0.13	-3.0
	Toledo	264	0.13	-3.0
Small Retail	Akron	259	0.17	-4.6
	Cincinnati	311	0.15	-4.5
	Cleveland	269	0.15	-4.6



Building Type	City	$\Delta kWh_{100SF}$	$\Delta kW_{100SF}$	$\Delta MMBtu_{100SF}$
	Columbus	277	0.14	-4.6
	Dayton	286	0.18	-4.9
	Mansfield	252	0.18	-5.1
	Toledo	262	0.16	-5.3

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: TBD

## Roof Insulation (Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, Lighting End Use)**)

### Description

This section covers improvements to the roof insulation in commercial buildings. Roof insulation R-value is assumed to increase to R-18 from the baseline level assumed for each building type. Energy and demand saving are realized through reductions in the building heating and cooling loads. The approach utilizes DOE-2.2 simulations on a series of commercial prototypical building models. The commercial simulation models are adapted from the California Database for Energy Efficiency Resources (DEER) study, with changes to reflect Ohio climate and building practices. Energy and demand impacts are normalized per thousand square feet of installed insulation.

### Definition of Efficient Equipment

The efficient condition is R-18 insulation on the roof.

### Definition of Baseline Equipment

The baseline condition by building type is shown in the table below:

Building Type	Baseline R-Value
Assembly	R-12
Big Box Retail	R-13.5
Fast Food	R-13.5
Full Service Restaurant	R-13.5
Light Industrial	R-12
School	R-13.5
Small Office	R-13.5
Small Retail	R-13.5

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{SF} / 1000 * \Delta \text{kWh}_{\text{kSF}}$$

$$\text{Summer Coincident Peak kW Savings} = \text{SF} / 1000 * \Delta \text{kW}_{\text{kSF}} * 0.74$$

$$\text{Annual MMBtu Increase} = \text{SF} / 1000 * \Delta \text{MMBtu}_{\text{kSF}}$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 20 years<sup>529</sup>.

### Deemed Measure Cost

The full installed cost for retrofit applications is \$1.36 per square foot<sup>530</sup>.

### Deemed O&M Cost Adjustments

There are no expected O&M cost adjustments for this measure.

### Coincidence Factor

The coincidence factor is 0.74<sup>531</sup>.

<sup>529</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008.

<sup>530</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Cost Values and Summary Documentation”, California Public Utilities Commission, December 16, 2008.

<sup>531</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

---



---

## REFERENCE SECTION

---



---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{SF} / 1000 * \Delta \text{kWh}_{\text{kSF}}$$

Where:

SF = The square footage of the roof. To be collected with the incentive form.  
 $\Delta \text{kWh}_{\text{kSF}}$  = the kWh savings per thousand square feet of roof area. This depends on the building type and region in Ohio, and can be found in the lookup table below.

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \text{SF} / 1000 * \Delta \text{kW}_{\text{kSF}} * \text{CF}$$

Where:

$\Delta \text{kW}_{\text{kSF}}$  = the kW savings per thousand square feet of roof area. This depends on the building type and region in Ohio, and can be found in the lookup table below.  
 CF = The summer coincident peak factor, or 0.74.

#### Baseline Adjustment

There are no expected future code changes to affect this measure.

#### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = \text{SF} / 1000 * \Delta \text{MMBtu}_{\text{kSF}}$$

Where:

$\Delta \text{MMBtu}_{\text{kSF}}$  = unit gas savings per thousand square feet of roof space. See lookup table below.

#### Deemed O&M Cost Adjustment Calculation

There are no expected O&M costs or savings associated with this measure.

#### Reference Tables

Roof Insulation <sup>532</sup>				
Building Type	City	$\Delta \text{kWh}_{\text{kSF}}$	$\Delta \text{kW}_{\text{kSF}}$	$\Delta \text{MMBtu}_{\text{kSF}}$
Assembly	Akron	28	0.047	3.5
	Cincinnati	34	0.065	2.7
	Cleveland	26	0.021	2.9
	Columbus	36	0.024	3.2
	Dayton	36	0.076	3.5
	Mansfield	31	0.012	3.3
	Toledo	41	0.018	5.0

<sup>532</sup> Unit energy, demand, and gas savings data is based on a series of prototypical small commercial building simulation runs. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

Building Type	City	$\Delta kWh_{kSF}$	$\Delta KW_{kSF}$	$\Delta MMBtu_{kSF}$
Big Box Retail	Akron	-6	0.025	2.5
	Cincinnati	-5	0.039	1.9
	Cleveland	-4	0.028	2.5
	Columbus	-1	0.034	2.6
	Dayton	-2	0.032	2.5
	Mansfield	-8	0.030	2.8
	Toledo	2	0.023	3.0
Fast Food Restaurant	Akron	37	0.050	3.6
	Cincinnati	49	0.000	3.1
	Cleveland	43	0.000	3.6
	Columbus	39	0.000	3.3
	Dayton	45	0.050	3.4
	Mansfield	36	0.050	3.7
	Toledo	43	0.000	3.8
Full-Service Restaurant	Akron	74	0.050	5.1
	Cincinnati	77	0.050	4.3
	Cleveland	78	0.025	5.3
	Columbus	63	0.050	4.3
	Dayton	69	0.075	4.4
	Mansfield	71	0.050	5.3
	Toledo	84	0.050	5.6
Light Industrial	Akron	57	0.028	4.3
	Cincinnati	68	0.018	3.6
	Cleveland	64	0.012	4.2
	Columbus	51	0.023	3.6
	Dayton	63	0.028	4.1
	Mansfield	60	0.029	4.5
	Toledo	53	0.021	4.4
Primary School	Akron	115	-0.008	4.4
	Cincinnati	131	0.150	3.9
	Cleveland	117	0.106	4.4
	Columbus	109	0.054	4.0
	Dayton	126	0.034	4.2
	Mansfield	113	0.056	4.7
	Toledo	116	0.108	4.6
Small Office	Akron	21	0.020	2.1
	Cincinnati	26	0.040	1.6
	Cleveland	27	0.020	2.1
	Columbus	21	0.040	1.7
	Dayton	26	0.000	1.9
	Mansfield	20	0.040	2.2
	Toledo	23	0.020	2.1
Small Retail	Akron	51	0.047	3.4
	Cincinnati	52	0.047	2.8
	Cleveland	53	0.031	3.4
	Columbus	43	0.031	2.9
	Dayton	53	0.047	3.2

Building Type	City	$\Delta kWh_{kSF}$	$\Delta KW_{kSF}$	$\Delta MMBtu_{kSF}$
	Mansfield	48	0.047	3.6
	Toledo	52	0.031	3.8

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

## High Performance Glazing (Retrofit – Early Replacement)

**Official Measure Code** (Measure Number: **X-X-X-X (Efficient Products, Lighting End Use)**)

### Description

This section covers installation of high performance glazing in commercial buildings. The baseline condition is assumed to be double pane clear glass with a solar heat gain coefficient of 0.73 and U-value of 0.72 Btu/hr-SF-deg F. The efficient glazing must have a solar heat gain coefficient of 0.40 or less and U-value of 0.57 Btu/hr-SF-deg F or less. Energy and demand saving are realized through reductions in the building heating and cooling loads. The approach utilizes DOE-2.2 simulations on a series of commercial prototypical building models. The commercial simulation models are adapted from the California Database for Energy Efficiency Resources (DEER) study, with changes to reflect Ohio climate and building practices. Energy and demand impacts are normalized per 100 square feet of window.

### Definition of Efficient Equipment

The efficient condition is a window with a U-value of 0.57 and a solar heat gain coefficient of 0.4.

### Definition of Baseline Equipment

The baseline condition is a window with a U-value of 0.72 and a solar heat gain coefficient of 0.73.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{SF} / 100 * (\Delta \text{kWh}_{100\text{SF}})$$

$$\text{Summer Coincident Peak kW Savings} = \text{SF} / 100 * (\Delta \text{kW}_{100\text{SF}}) * 0.74$$

$$\text{Annual MMBTU Increase} = \text{SF} / 100 * (\Delta \text{MMBTU}_{100\text{SF}})$$

### Deemed Lifetime of Efficient Equipment

The expected lifetime of the measure is 20 years<sup>533</sup>.

### Deemed Measure Cost

The full installed cost for retrofit applications is \$54.82 per square foot of window<sup>534</sup>.

### Deemed O&M Cost Adjustments

There are no expected O&M cost adjustments for this measure.

### Coincidence Factor

The coincidence factor is 0.74<sup>535</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

---

<sup>533</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008.

<sup>534</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010. Value derived from Efficiency Vermont project experience and conversations with suppliers.

<sup>535</sup> Coincidence factor supplied by Duke Energy for the commercial HVAC end-use. Pending verification based on information from the utilities.

## Energy Savings

$$\Delta kWh = SF / 100 * (\Delta kWh_{100SF})$$

Where:

SF = glazing surface area of installed window, not including frame (square feet).  
 $\Delta kWh_{100SF}$  = the kWh savings per 100 square feet of window space. See lookup table below.

## Summer Coincident Peak Demand Savings

$$\Delta kW = SF / 100 * (\Delta kW_{100SF}) * CF$$

Where:

$\Delta kW_{100SF}$  = the kW savings per 100 square feet of window space. See lookup table below.  
CF = The summer coincident peak factor, or 0.74.

## Baseline Adjustment

There are no expected future code changes to affect this measure.

## Fossil Fuel Impact Descriptions and Calculation

$$\Delta MMBtu = SF / 100 * (\Delta MMBtu_{100SF})$$

Where:

$\Delta MMBtu_{100SF}$  = unit gas savings per 100 square feet of window space. See lookup table below.

## Deemed O&M Cost Adjustment Calculation

There are no expected O&M costs or savings associated with this measure.

## Reference Tables

High Performance Windows <sup>536</sup>				
Building Type	City	$\Delta kWh_{100SF}$	$\Delta kW_{100SF}$	$\Delta MMBtu_{100SF}$
Assembly	Akron	269	0.152	-0.28
	Cincinnati	358	0.138	-0.86
	Cleveland	300	0.143	-0.75
	Columbus	278	0.052	-0.63
	Dayton	312	0.157	-0.43
	Mansfield	262	0.052	-0.26
	Toledo	264	0.038	-0.03
Big Box Retail	Akron	267	0.203	-0.35
	Cincinnati	315	0.158	-1.23
	Cleveland	281	0.169	-0.51
	Columbus	278	0.124	-0.91
	Dayton	301	0.180	-1.04
	Mansfield	263	0.180	-0.56

<sup>536</sup> Unit energy, demand, and gas savings data is based on a series of prototypical small commercial building simulation runs. The prototypes are based on the California DEER study prototypes, modified for local construction practices. Simulations were run using TMY3 weather data for each of the cities listed. Building prototypes used in the energy modeling are described in Appendix A - Prototypical Building Energy Simulation Model Development.

Building Type	City	$\Delta kWh_{100SF}$	$\Delta kW_{100SF}$	$\Delta MMBtu_{100SF}$
	Toledo	276	0.135	-0.59
Fast Food Restaurant	Akron	253	0.189	-0.29
	Cincinnati	301	0.155	-0.84
	Cleveland	269	0.138	-0.31
	Columbus	260	0.069	-0.86
	Dayton	280	0.155	-0.65
	Mansfield	251	0.172	-0.43
	Toledo	253	0.120	-0.79
Full-Service Restaurant	Akron	268	0.193	-0.55
	Cincinnati	313	0.166	-1.30
	Cleveland	281	0.193	-0.47
	Columbus	265	0.166	-1.63
	Dayton	294	0.193	-1.22
	Mansfield	259	0.193	-0.86
	Toledo	273	0.193	-1.02
Light Industrial	Akron	218	0.136	-2.21
	Cincinnati	188	0.203	-1.47
	Cleveland	220	0.068	-1.40
	Columbus	159	0.136	-2.21
	Dayton	236	0.136	-1.47
	Mansfield	186	0.226	-1.56
	Toledo	185	0.136	-1.81
Primary School	Akron	398	0.189	-2.53
	Cincinnati	493	0.204	-3.50
	Cleveland	443	0.181	-2.63
	Columbus	386	0.172	-3.41
	Dayton	456	0.198	-3.35
	Mansfield	384	0.065	-3.10
	Toledo	400	0.157	-3.08
Small Office	Akron	241	0.144	-0.38
	Cincinnati	294	0.144	-0.60
	Cleveland	257	0.122	-0.41
	Columbus	259	0.118	-0.68
	Dayton	273	0.083	-0.52
	Mansfield	241	0.131	-0.52
	Toledo	258	0.127	-0.59
Small Retail	Akron	272	0.177	-0.77
	Cincinnati	315	0.158	-1.32
	Cleveland	283	0.158	-0.75
	Columbus	277	0.149	-1.42
	Dayton	296	0.177	-1.23
	Mansfield	266	0.186	-0.95
	Toledo	274	0.158	-1.28



**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Engineered Nozzles (Time of Sale, Retrofit - Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Engineered nozzles use compressed air to entrain and amplify atmospheric air into a stream, thus increasing pressure with minimal compressed air use. They are able to induce a large airflow entrainment while still using a smaller volume of air than open jets. The velocity of the resulting airflow is reduced, but the mass flow of the air is increased, thus increasing the cooling and drying effect. Energy savings result due to a decrease in compressor work that is required to provide the nozzles with compressed air. Engineered nozzles have the added benefits of noise reduction and improved safety in systems with greater than 30 psig.

### Definition of Efficient Equipment

The efficient condition assumes an engineered nozzle is equipped to the end of a pneumatic tool.

### Definition of Baseline Equipment

The baseline condition assumes an open copper tube or an air gun with an open end.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings} = 0.0145 \times (\text{FLOW}_{\text{baseline}} - \text{FLOW}_{\text{eng}}) \times \text{HOURS}$$

$$\text{Summer Coincident Peak kW Savings} = 0.0109 \times (\text{FLOW}_{\text{baseline}} - \text{FLOW}_{\text{eng}})$$

### Deemed Lifetime of Efficient Equipment

15 years<sup>537</sup>

### Deemed Measure Cost

\$14<sup>538</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.75<sup>539</sup>

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{FLOW}_{\text{baseline}} - \text{FLOW}_{\text{eng}}) \times \text{kW}_{\text{scfm}} \times \% \text{USE} \times \text{HOURS}$$

Where:

$\text{kW}_{\text{scfm}}$  = the average amount of electrical demand needed to produce one cubic foot of air at 100 PSI  
= 0.29<sup>540</sup>

---

<sup>537</sup> PA Consulting Group (2009). *Business Programs: Measure Life Study*. Prepared for State of Wisconsin Public Service Commission

<sup>538</sup> See "Compressed Air Analysis.xls" for cost details

<sup>539</sup> PG&E 1996, RLW Schools, RLW CF, SDG&E Time of Use Surveys. Based on 4p-5p peak

<sup>540</sup> See "Compressed Air Analysis.xls" for more detail

$FLOW_{baseline}$  = The flow rate of compressed air from an open end (SCFM)  
 $FLOW_{eng}$  = The flow rate of compressed air from an engineered nozzle (SCFM)  
 = Depending on size of nozzle:

	<b>Open Flow (SCFM)<sup>541</sup> <math>FLOW_{baseline}</math></b>	<b>Engineered Nozzle (SCFM)<sup>542</sup> <math>FLOW_{eng}</math></b>	<b><math>\Delta</math>SCFM</b>
<b>1/8" Nozzle</b>	21	6	15
<b>1/4" Nozzle</b>	58	11	47

$\%USE$  = percent of the compressor total operating hours that the nozzle is in use (5% for 3 seconds of use per minute)  
 =  $0.05^{543}$   
 $HOURS$  = annual operating hours of the compressed air system  
 = If site specific value is unknown, assume values based on number of facility shifts as below:

<b>No. of Shifts</b>	<b>HOURS</b>	<b>Description</b>
Single Shift(8/5)	1976	7am – 3pm, weekdays, minus holidays and scheduled downtime
2-Shift	3952	7am – 11pm, weekdays, minus holidays and scheduled downtime
3-Shift	5928	24 hours per day, weekdays, minus holidays and scheduled downtime
4-Shift	8320	24 hours per day, 7 days a week minus holidays and scheduled downtime

#### Summer Coincident Peak Demand Savings

$$\Delta kW = \Delta kWh / HOURS \times CF$$

Where:

$\Delta kWh$  = Energy Savings, calculated above  
 $HOURS$  = Operating Hours, see above  
 $CF$  = Peak coincidence factor  
 = 0.75

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

<sup>541</sup> Machinery's Handbook 25th Edition.

<sup>542</sup> Survey of Engineered Nozzle Suppliers

<sup>543</sup> Assumes 50% handheld air guns and 50% stationary air nozzles. Manual air guns tend to be used less than stationary air nozzles, and a conservative estimate of 1 second of blow-off per minute of compressor run time is assumed. Stationary air nozzles are commonly more wasteful as they are often mounted on machine tools and can be manually operated resulting in the possibility of a long term open blow situation. An assumption of 5 seconds of blow-off per minute of compressor run time is used.

## Insulated Pellet Dryers (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Resin pellets used in injection molders and extruders are typically dried using electrically heated and desiccant dried air. Flexible ducts in the 3" to 8" diameter size range circulate the drying air. Air temperatures usually range from 160°F to 200°F. Un-insulated duct heat loss must be replaced by electric resistance heaters. Most facilities have pellet dryers running constantly to maintain pellet dryness at all times.

### Definition of Efficient Equipment

The efficient condition is a pellet dryer with insulation on the heat ducts.

### Definition of Baseline Equipment

The baseline condition is pellet dryer with un-insulated heat ducts.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings} = L \times (kW_{\text{baseline}} - kW_{\text{eff}}) \times \text{HOURS}$$

$$\text{Summer Coincident Peak kW Savings} = L \times (kW_{\text{baseline}} - kW_{\text{eff}}) \times \text{CF}$$

### Deemed Lifetime of Efficient Equipment

5 years<sup>544</sup>

### Deemed Measure Cost

Incremental costs are based on linear feet and diameter of heating ducts.

### Incremental Capital Cost<sup>545</sup>

Diameter of Pipe (in.)	Incremental Cost of Insulation (\$/ft.)
3"	\$33
4"	\$43
5"	\$54
6"	\$65
8"	\$86

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.75<sup>546</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

---

<sup>544</sup> Engineering Judgment

<sup>545</sup> Based on a review of available manufacturer pricing information

<sup>546</sup> PG&E 1996, RLW Schools, RLW CF, SDG&E Time of Use Surveys.

## Energy Savings

$$\Delta \text{kWh} = L \times (\text{kW}_{\text{baseline}} - \text{kW}_{\text{eff}}) \times \text{HOURS}$$

Where:

$\Delta \text{kWh}$  = non-coincident demand savings  
 $L$  = Length of pipe to be insulated (ft.)  
 $\text{kW}_{\text{baseline}}$  = maximum hourly demand at technology level without insulation  
= See table below  
 $\text{kW}_{\text{eff}}$  = maximum hourly demand at technology level with pipe insulation  
= See table below  
 $\text{HOURS}$  = annual operating hours  
= 4962<sup>547</sup>

## Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = L \times (\text{kW}_{\text{baseline}} - \text{kW}_{\text{eff}}) \times \text{CF}$$

Where:

$\text{CF}$  = Summer Coincident Peak Factor  
= 0.75<sup>548</sup>

## Fossil Fuel Impact Descriptions and Calculation

n/a

## Water Impact Descriptions and Calculation

n/a

## Deemed O&M Cost Adjustment Calculation

n/a

---

<sup>547</sup> State of Wisconsin Public Service Commission of Wisconsin, Focus on Energy Evaluation, Business Programs: Deemed Savings Parameter Development. August 2009. PA Consulting Group Inc.

<sup>548</sup> PG&E 1996, RLW Schools, RLW CF, SDG&E Time of Use Surveys.

## Reference Tables

**Electric Demand for Load Temperatures and Duct Diameters**

Temperature (°F)	Duct Diameter (in)	KW <sub>baseline</sub>	KW <sub>energyefficientmethod</sub>	ΔKW
160	3	0.03/ft	0.01/ft	0.02/ft
	4	0.04/ft	0.01/ft	0.03/ft
	5	0.05/ft	0.01/ft	0.04/ft
	6	0.06/ft	0.01/ft	0.05/ft
	8	0.09/ft	0.01/ft	0.08/ft
170	3	0.03/ft	0.01/ft	0.03/ft
	4	0.05/ft	0.01/ft	0.04/ft
	5	0.06/ft	0.01/ft	0.05/ft
	6	0.07/ft	0.01/ft	0.06/ft
	8	0.10/ft	0.01/ft	0.09/ft
180	3	0.04/ft	0.01/ft	0.03/ft
	4	0.05/ft	0.01/ft	0.04/ft
	5	0.07/ft	0.01/ft	0.06/ft
	6	0.08/ft	0.01/ft	0.07/ft
	8	0.11/ft	0.01/ft	0.10/ft
190	3	0.04/ft	0.01/ft	0.04/ft
	4	0.06/ft	0.01/ft	0.05/ft
	5	0.07/ft	0.01/ft	0.06/ft
	6	0.09/ft	0.01/ft	0.08/ft
	8	0.13/ft	0.02/ft	0.11/ft
200	3	0.05/ft	0.01/ft	0.04/ft
	4	0.07/ft	0.01/ft	0.06/ft
	5	0.08/ft	0.01/ft	0.07/ft
	6	0.10/ft	0.01/ft	0.09/ft
	8	0.14/ft	0.02/ft	0.12/ft

### Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

## Injecting Molding Barrel Wrap (Retrofit – New Equipment)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Removable insulated blankets enclose the cylindrical barrels of an injection molding machine. Surface temperatures of the barrels range from 300°F to 600°F, depending on the resins processed. Barrels are heated either with electric resistance band heaters or by friction from the mechanical screw which shears plastic material in the barrel generating frictional heat. Insulated blankets minimize the use of resistance heating without affecting temperature control of the resin. Barrel wraps are held in place by straps. Blankets are available either in standard sizes or can be custom manufactured.

### Definition of Efficient Equipment

The efficient condition is assumed to be an injection molding machine with an insulating blanket or vest wrapped around the barrel.

### Definition of Baseline Equipment

The baseline condition is assumed to be an injection molding machine with no added insulation.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings} = (\Delta E_{\text{Loss}} * \text{LEN}_{\text{Barrel}} * D_{\text{Barrel}} * \pi) / 1000 * \text{HOURS}$$

$$\text{Summer Coincident Peak kW Savings} = (\Delta E_{\text{Loss}} * \text{LEN}_{\text{Barrel}} * D_{\text{Barrel}} * \pi) / 1000$$

### Deemed Lifetime of Efficient Equipment

5 years<sup>549</sup>

### Deemed Measure Cost

The actual measure installation cost should be used (including material and labor).

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.75<sup>550</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\Delta E_{\text{Loss}} * \text{LEN}_{\text{Barrel}} * D_{\text{Barrel}} * \pi) / 1000 * \text{HOURS}$$

Where:

$\Delta E_{\text{Loss}}$  = The difference in heat loss (measured in watts/ft<sup>2</sup> needed to replace lost heat) between an injection molding barrel with insulation compared to an injection molding barrel without insulation. This is dependent on the operating temperature (site specific) and the

---

<sup>549</sup> Engineering judgment

<sup>550</sup> PG&E 1996, RLW Schools, RLW CF, SDG&E Time of Use Surveys. Pending verification based on information to be provided by the utilities.

thickness of the insulation (site specific). See the table “Calculating Barrel Heat Loss” in the reference table section for associated values.

LEN<sub>Barrel</sub> = The length of the barrel  
= Actual installed

D<sub>Barrel</sub> = The diameter of the barrel  
= Actual installed

π = 3.14159

1000 = conversion factor for watts to kilowatts

HOURS = Annual operating hours  
= If actual operating hours are unknown, assume 3952<sup>551</sup>.

### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta E_{Loss} * LEN_{Barrel} * D_{Barrel} * \pi) / 1000 * CF$$

Where:

CF = Summer Peak Coincidence Factor  
= 0.75

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

Calculating Barrel Heat Loss<sup>552</sup>

Operating Temperature (°F)	No Insulation (Watts/ ft <sup>2</sup> )	1” Insulation (Watts/ft <sup>2</sup> )	1.5” Insulation (Watts/ft <sup>2</sup> )
300	180	18.6	12.4
325	210	20.9	14
350	243	23.4	15.6
375	275	26	17.3
400	313	29	19
425	350	31.5	21
450	387	34.3	22.9
475	425	37.2	24.8
500	465	40.1	25.8
525	505	43.2	26.9
550	550	46.5	28.3
575	605	49.9	29.9
600	660	54.1	32.1

<sup>551</sup> Default annual operating hours estimate assumes equipment operates continuously on a typical 2-shift operation (7am – 11pm, weekdays, minus some holidays and scheduled down time).

<sup>552</sup> Industrial Modeling Supplies (2009). Reference/Conversion Chart.

<http://www.imscompany.com/pdf/Tech%20Tips%20&%20Conversion%20and%20Reference%20Charts.pdf>



**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## ENERGY STAR Hot Food Holding Cabinet (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Commercial insulated hot food holding cabinet models that meet program requirements incorporate better insulation, reducing heat loss, and may also offer additional energy saving devices such as magnetic door electric gaskets, auto-door closures, or dutch doors. The insulation of the cabinet also offers better temperature uniformity within the cabinet from top to bottom. This means that qualified hot food holding cabinets are more efficient at maintaining food temperature while using less energy.

### Definition of Efficient Equipment

The efficient equipment is assumed to be an ENERGY STAR qualified hot food holding cabinet with an idle energy rate of 0.04kW/ft<sup>3</sup>

### Definition of Baseline Equipment

The baseline equipment is assumed to be a standard hot food holding cabinet with an idle energy rate of 0.1kW/ft<sup>3</sup>

### Deemed Savings for this Measure

Annual kWh Savings =

Full Size	Three-Quarter Size	Half Size
5,256	2,847	1,862

Summer Coincident Peak kW Savings =

Full Size	Three-Quarter Size	Half Size
0.80	0.44	0.29

### Deemed Lifetime of Efficient Equipment

12 years<sup>553</sup>

### Deemed Measure Cost

The incremental cost for Energy Star hot food holding cabinet is assumed to be \$1,110<sup>554</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.84<sup>555</sup>

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

$$\begin{aligned} \text{kW}_{\text{save}} &= (W_{\text{foot base}} - W_{\text{foot eff}}) \times \text{VOLUME} \times 1000 \\ \text{kWH} &= \text{kW}_{\text{save}} \times \text{HOURS} \end{aligned}$$

<sup>553</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>554</sup> NYSERDA Deemed Savings Database

<sup>555</sup> RLW Analytics. Coincidence Factor Study – Residential and Commercial Industrial Lighting Measures. Spring 2007.

Where:

$kW_{\text{save}}$  = the difference in connected load between the baseline and the efficient equipment  
(before the coincidence factor is applied)

HOURS = Annual operating hours  
= 5475<sup>556</sup>

### Summer Coincident Peak Demand Savings

$$kW_{\text{save}} = (W_{\text{foot base}} - W_{\text{foot eff}}) \times \text{VOLUME} \times 1000$$
$$\Delta kW = kW \times CF$$

Where:

$kW_{\text{save}}$  = the difference in connected load between the baseline and the efficient equipment  
(before the coincidence factor is applied)

$W_{\text{foot base}}$  = the electrical demand per cubic foot of the baseline equipment

$W_{\text{foot eff}}$  = the electrical demand per cubic foot of the efficient equipment

VOLUME = the internal volume of the holding cabinet (ft<sup>3</sup>)

1,000 = conversion of W to kW

Parameter	Full Size	Three-Quarter Size	Half Size
VOLUME <sup>557</sup>	20	12	8
$W_{\text{foot base}}$	70	70	70
$W_{\text{foot eff}}$	22	27	29
kWsave	0.96	0.52	0.34

CF = Summer Peak Coincidence Factor  
= 0.84

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

n/a

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>556</sup> Food Service Technology Center (FSTC), based on assumption that restaurant is open 15 hours a day, 365 days a year.

<sup>557</sup> Sizes are from ENERGY STAR calculator

## Steam Cookers (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Energy efficient steam cookers that have earned the ENERGY STAR offer shorter cook times, higher production rates, and reduced heat loss due to better insulation and more efficient steam delivery system. Energy usage calculations are based on 12 hours a day, 365 days per year, with one preheat and cooking 100 pounds per day of food.

### Definition of Efficient Equipment

The efficient condition assumes the installation of an ENERGY STAR qualified steam cooker.

### Definition of Baseline Equipment

The baseline condition assumes a conventional boiler-style steam cooker meeting minimum federal standards for electricity and water consumption.

### Deemed Calculations for this Measure

$$\text{Annual kWh Savings} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{Annual kWh Savings} / \text{HOURS}) \times \text{CF}$$

### Deemed Lifetime of Efficient Equipment

12 years<sup>558</sup>

### Deemed Measure Cost

The incremental cost of an ENERGY STAR steam cooker is \$2,000<sup>559</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.84<sup>560</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\text{kWh} = [\text{LB} \times \text{E}_{\text{FOOD}}/\text{EFF} + \text{IDLE} \times (\text{HOURS}_{\text{DAY}} - \text{LB}/\text{PC} - \text{PRE}_{\text{TIME}}/60) + \text{PRE}_{\text{ENERGY}}] \times \text{DAYS}$$

$$\Delta \text{kWh} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

Where:

$\text{kWh}_{\text{base}}$	= the annual energy usage of the baseline equipment calculated using baseline values
$\text{kWh}_{\text{eff}}$	= the annual energy usage of the efficient equipment calculated using efficient values
$\text{HOURS}_{\text{DAY}}$	= Daily operating hours

---

<sup>558</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/esteamercalc.php>

<sup>559</sup> NYSERDA Deemed Savings Database

<sup>560</sup> RLW Analytics. Coincidence Factor Study – Residential and Commercial Industrial Lighting Measures. Spring 2007.

	<sup>561</sup>
PRE <sub>TIME</sub>	= Preheat time (min/day), the amount of time it takes a steamer to reach operating temperature when turned on
	= 15 min/day <sup>562</sup>
PRE <sub>ENERGY</sub>	= Preheat energy (kWh/day)
	= 1.5 kWh/day <sup>563</sup>
E <sub>FOOD</sub>	= ASTM Energy to Food (kWh/lb); the amount of energy absorbed by the food during cooking, per pound of food
	= 0.038 <sup>564</sup>
DAYS	= Operating days per year
	= 365

*The following variables are dependent on the pan capacity of efficient equipment which is a site specific variable. See the 'Reference Tables' section for the associated values*

EFF	= Heavy load cooking energy efficiency (%)
IDLE	= Idle energy rate
PC	= Production capacity (lbs/hr)
LB	= Pounds of food cooked per day (lb/day)

### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta kWh / HOURS) \times CF$$

Where:

$\Delta kWh$	= Annual energy savings (kWh)
HOURS	= Equivalent full load hours
	= 4380
CF	= Summer Peak Coincidence Factor for measure
	= 0.84

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

$$\Delta Water = (Rate_{base} - Rate_{eff}) \times EFLH$$

$$= 30 \times EFLH$$

Where

$\Delta Water$	= Annual water savings (gal)
Rate <sub>base</sub>	= Water consumption rate (gal/h) of baseline equipment
	= 40 <sup>565</sup>
Rate <sub>eff</sub>	= Water consumption rate (gal/h) of baseline equipment
	= 10 <sup>566</sup>
EFLH	= Equivalent full load hours
	= 4380

<sup>561</sup> Food Service Technology Center (FSTC), based on assumption that restaurant is open 12 hours a day, 365 days a year.

<sup>562</sup> FSTC (2002). *Commercial Cooking Appliance Technology Assessment*. Chapter 8: Steamers.

<sup>563</sup> Ibid.

<sup>564</sup> American Society for Testing and Materials. Industry Standard.

<sup>565</sup> FSTC (2002). *Commercial Cooking Appliance Technology Assessment*. Chapter 8: Steamers.

<sup>566</sup> Ibid.

## Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

Values for ASTM parameters for baseline and efficient conditions (unless otherwise noted) were determined by FSTC according to ASTM F1484, the Standard Test Method for Performance of Steam Cookers. These parameters include the three of the four listed below: Idle Energy Rate, Production Capacity, and Heavy Load Cooking Efficiency. Pounds of Food Cooked per Day based on the default value for a 3 pan steam cooker (100 lbs from FSTC) and scaled up based on the assumption that steam cookers with a greater number of pans cook larger quantities of food per day. It is not known which specific models were tested but the values presented are thought to be the averages of tested models.

Parameters that vary with number of pans:

# of Pans	Parameter	Baseline Model	Efficient Model
3	Idle Energy Rate (kW) <sup>567</sup>	1	0.24
	Production Capacity (lb/h)	70	50
	Pounds of Food Cooked per Day	100	100
	Heavy Load Cooking Energy Efficiency <sup>568</sup>	20%	59%
4	Idle Energy Rate (kW)	1.325	0.27
	Production Capacity (lb/h)	87	67
	Pounds of Food Cooked per Day	128	128
	Heavy Load Cooking Energy Efficiency	20%	52%
5	Idle Energy Rate (kW)	1.675	0.24
	Production Capacity (lb/h)	103	83
	Pounds of Food Cooked per Day	160	160
	Heavy Load Cooking Energy Efficiency	20%	62%
6	Idle Energy Rate (kW)	2	0.31
	Production Capacity (lb/h)	120	100
	Pounds of Food Cooked per Day	192	192
	Heavy Load Cooking Energy Efficiency	20%	62%

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>567</sup> Efficient values calculated from a list of ENERGY STAR qualified products. See “ES Steam Cooker Analysis.xls” for details.

<sup>568</sup> Ibid.

## ENERGY STAR Fryers (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Commercial fryers that have earned the ENERGY STAR offer shorter cook times and higher production rates through advanced burner and heat exchanger designs. Frypot insulation reduces standby losses resulting in a lower idle energy rate. Fryers that have earned the ENERGY STAR are up to 30% more efficient than standard models. Energy savings estimates are based on a 15" fryer.

### Definition of Efficient Equipment

The efficient equipment is assumed to be an ENERGY STAR qualified electric fryer

### Definition of Baseline Equipment

The baseline equipment is assumed to be a standard electric fryer with a heavy load efficiency of 75%.

### Deemed Savings for this Measure

Annual kWh Savings = 982.71 kWh/yr

Summer Coincident Peak kW Savings = 0.22 kW

### Deemed Lifetime of Efficient Equipment

12 years<sup>569</sup>

### Deemed Measure Cost

The incremental cost for commercial combination ovens is assumed to be \$500<sup>570</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.84<sup>571</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\text{kWh} = [\text{LB} \times \text{E}_{\text{FOOD}}/\text{EFF} + \text{IDLE} \times (\text{HOURS}_{\text{DAY}} - \text{LB}/\text{PC} - \text{PRE}_{\text{TIME}}/60) + \text{PRE}_{\text{ENERGY}}] \times \text{DAYS}$$

$$\Delta\text{kWh} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

Where:

$\text{kWh}_{\text{base}}$  = the annual energy usage of the baseline equipment calculated using baseline values  
 $\text{kWh}_{\text{eff}}$  = the annual energy usage of the efficient equipment calculated using efficient values  
 $\text{HOURS}_{\text{DAY}}$  = Daily operating hours  
= 16<sup>572</sup>

---

<sup>569</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>570</sup> NYSERDA Deemed Savings Database

<sup>571</sup> RLW Analytics. Coincidence Factor Study – Residential and Commercial Industrial Lighting Measures. Spring 2007.

PRE <sub>TIME</sub>	= Preheat time (min/day), the amount of time it takes a fryer to reach operating temperature when turned on = 15 min/day <sup>573</sup>
E <sub>FOOD</sub>	= ASTM Energy to Food (kWh/lb); the amount of energy absorbed by the food during cooking, per pound of food = 0.167 <sup>574</sup>
LB	= Pounds of food cooked per day (lb/day) = 150 <sup>575</sup>
DAYS	= 365
EFF	= Heavy load cooking energy efficiency (%)
IDLE	= Idle energy rate
PC	= Production capacity (lbs/hr)
PRE <sub>ENERGY</sub>	= Preheat energy (kWh/day)

Performance Metrics: Baseline and Efficient Values<sup>576</sup>

Metric	Baseline Model	Energy Efficient Model
PRE <sub>ENERGY</sub>	2.3	1.7
IDLE	1.05	0.84
EFF	75%	84%
PC	65	70

### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta kWh / \text{HOURS}) \times CF$$

Where:

ΔkWh	= Annual energy savings (kWh)
HOURS = Equivalent full load hours	= 4380
CF	= Summer Peak Coincidence Factor for measure = 0.84

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>572</sup> Food Service Technology Center (FSTC), based on assumption that restaurant is open 16 hours a day, 365 days a year.

<sup>573</sup> FSTC (2002). *Commercial Cooking Appliance Technology Assessment*. Chapter 7: Fryers.

<sup>574</sup> American Society for Testing and Materials. Industry Standard for Commercial Ovens.

<sup>575</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>576</sup> Baseline values based on assumptions from FSTC life cycle cost calculator. Efficient values reflect averages from a list of qualifying models found on the ENERGY STAR website (accessed June 2010)



## Combination Oven (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

A combination oven is a convection oven that includes the added capability to inject steam into the oven cavity and typically offers at least three distinct cooking modes.

### Definition of Efficient Equipment

The efficient equipment is assumed to be an electric combination oven with a heavy load cooking energy efficiency of at least 60%.

### Definition of Baseline Equipment

The baseline equipment is assumed to be a typical low-efficiency oven with a heavy load efficiency of 44%.

### Deemed Savings for this Measure

Annual kWh Savings = 18,432 kWh

Summer Coincident Peak kW Savings = 3.53 kW

### Deemed Lifetime of Efficient Equipment

12 years<sup>577</sup>

### Deemed Measure Cost

The incremental cost for commercial combination ovens is assumed to be \$2,125<sup>578</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.84<sup>579</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\text{kWh} = [\text{LB} \times \text{E}_{\text{FOOD}}/\text{EFF} + \text{IDLE} \times (\text{HOURS}_{\text{DAY}} - \text{LB}/\text{PC} - \text{PRE}_{\text{TIME}}/60) + \text{PRE}_{\text{ENERGY}}] \times \text{DAYS}$$

$$\Delta \text{kWh} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

Where:

$\text{kWh}_{\text{base}}$  = the annual energy usage of the baseline equipment calculated using baseline values

$\text{kWh}_{\text{eff}}$  = the annual energy usage of the efficient equipment calculated using efficient values

$\text{HOURS}_{\text{DAY}}$  = Daily operating hours

= 12<sup>580</sup>

---

<sup>577</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>578</sup> NYSERDA Deemed Savings Database

<sup>579</sup> RLW Analytics. Coincidence Factor Study – Residential and Commercial Industrial Lighting Measures. Spring 2007.

<sup>580</sup> Food Service Technology Center (FSTC), based on assumption that restaurant is open 12 hours a day, 365 days a year.

DAYS	= Days per year of operation = 365
PRE <sub>TIME</sub>	= Preheat time (min/day), the amount of time it takes a steamer to reach operating temperature when turned on = 15 min/day <sup>581</sup>
E <sub>FOOD</sub>	= ASTM Energy to Food (kWh/lb); the amount of energy absorbed by the food during cooking, per pound of food = 0.0732 <sup>582</sup>
LB	= Pounds of food cooked per day (lb/day) = 200 <sup>583</sup>
EFF	= Heavy load cooking energy efficiency (%)
IDLE	= Idle energy rate
PC	= Production capacity (lbs/hr)
PRE <sub>ENERGY</sub>	= Preheat energy (kWh/day)

Performance Metrics: Baseline and Efficient Values<sup>584</sup>

Metric	Baseline Model	Energy Efficient Model
PRE <sub>ENERGY</sub> (kWh)	3	1.5
IDLE (kW)	7.5	3
EFF	44%	60%
PC (lb/hr)	80	100

### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta kWh / \text{HOURS}) \times CF$$

Where:

$\Delta kWh$	= Annual energy savings (kWh)
HOURS	= Equivalent full load hours = 4380
CF	= Summer Peak Coincidence Factor for measure = 0.84

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

The water savings for commercial combination ovens are assumed to be 87,600 gallons per year<sup>585</sup>

### Deemed O&M Cost Adjustment Calculation

n/a

<sup>581</sup> Food Service Technology Center (2002). *Commercial Cooking Appliance Technology Assessment*. Prepared by Don Fisher.. Chapter 7: Ovens.

<sup>582</sup> American Society for Testing and Materials. Industry Standard for Commercial Ovens.

<sup>583</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>584</sup> Ibid.

<sup>585</sup> Food Service Technology Center (FSTC). Based on assumption that baseline ovens use water at an average rate of 40 gal/h while efficient models use water at an average rate of 20 gal/h

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Convection Oven (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Commercial convection ovens that are ENERGY STAR certified have higher heavy load cooking efficiencies, and lower idle energy rates making them on average about 20 percent more efficient than standard models. Energy savings estimates are for ovens using full size (18" x 36") sheet pans.

### Definition of Efficient Equipment

The efficient equipment is assumed to be an ENERGY STAR qualified electric convection oven.

### Definition of Baseline Equipment

The baseline equipment is assumed to be a standard convection oven with a heavy load efficiency of 65%.

### Deemed Savings for this Measure

Annual kWh Savings = 3,235 kWh

Summer Coincident Peak kW Savings = 0.62 kW

### Deemed Lifetime of Efficient Equipment

12 years<sup>586</sup>

### Deemed Measure Cost

The incremental cost for commercial convection ovens is assumed to be \$1,113<sup>587</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.84<sup>588</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\text{kWh} = [\text{LB} \times \text{E}_{\text{FOOD}}/\text{EFF} + \text{IDLE} \times (\text{HOURS}_{\text{DAY}} - \text{LB}/\text{PC} - \text{PRE}_{\text{TIME}}/60) + \text{PRE}_{\text{ENERGY}}] \times \text{DAYS}$$

$$\Delta \text{kWh} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

Where:

$\text{kWh}_{\text{base}}$  = the annual energy usage of the baseline equipment calculated using baseline values

$\text{kWh}_{\text{eff}}$  = the annual energy usage of the efficient equipment calculated using efficient values

$\text{HOURS}_{\text{DAY}}$  = Daily operating hours

= 12<sup>589</sup>

---

<sup>586</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>587</sup> NYSERDA Deemed Savings Database

<sup>588</sup> RLW Analytics. Coincidence Factor Study – Residential and Commercial Industrial Lighting Measures. Spring 2007.

<sup>589</sup> Food Service Technology Center (FSTC), based on assumption that restaurant is open 12 hours a day, 365 days a year.

DAYS	= Days per year of operation = 365
PRE <sub>TIME</sub>	= Preheat time (min/day), the amount of time it takes a steamer to reach operating temperature when turned on = 15 min/day <sup>590</sup>
E <sub>FOOD</sub>	= ASTM Energy to Food (kWh/lb); the amount of energy absorbed by the food during cooking, per pound of food = 0.0732 <sup>591</sup>
LB	= Pounds of food cooked per day (lb/day) = 100 <sup>592</sup>
EFF	= Heavy load cooking energy efficiency (%). See table below.
IDLE	= Idle energy rate. See table below.
PC	= Production capacity (lbs/hr). See table below.
PRE <sub>ENERGY</sub>	= Preheat energy (kWh/day). See table below.

Performance Metrics: Baseline and Efficient Values<sup>593</sup>

Metric	Baseline Model	Energy Efficient Model
PRE <sub>ENERGY</sub> (kWh)	1.5	1
IDLE (kW)	2	1.3 <sup>594</sup>
EFF	65%	74% <sup>595</sup>
PC (lb/hr)	70	80

### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta kWh / \text{HOURS}) \times CF$$

Where:

ΔkWh	= Annual energy savings (kWh)
HOURS	= Equivalent full load hours = 4380
CF	= Summer Peak Coincidence Factor for measure = 0.84

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

<sup>590</sup> Food Service Technology Center (2002). *Commercial Cooking Appliance Technology Assessment*. Prepared by Don Fisher.. Chapter 7: Ovens.

<sup>591</sup> American Society for Testing and Materials. Industry Standard for Commercial Ovens.

<sup>592</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/ecombicalc.php>

<sup>593</sup> Ibid.

<sup>594</sup> Calculated from list of Energy Star qualified models,

[http://www.energystar.gov/ia/products/prod\\_lists/comm\\_ovens\\_prod\\_list.xls](http://www.energystar.gov/ia/products/prod_lists/comm_ovens_prod_list.xls)

<sup>595</sup> Ibid.

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## ENERGY STAR Griddle (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

ENERGY STAR qualified commercial griddles have higher cooking energy efficiency and lower idle energy rates than standard equipment. The result is more energy being absorbed by the food compared with the total energy use, and less wasted energy when the griddle is in standby mode.

### Definition of Efficient Equipment

The efficient equipment is assumed to be an ENERGY STAR qualified griddle that has a cooking energy efficiency greater than 70%

### Definition of Baseline Equipment

The baseline equipment is assumed to be a conventional electric griddle with a cooking energy efficiency of 60%

### Deemed Calculations for this Measure

$$\text{Annual kWh Savings} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

$$\text{Summer Coincident Peak kW Savings} = (\text{Annual kWh Savings} / \text{HOURS}) \times \text{CF}$$

### Deemed Lifetime of Efficient Equipment

12 years<sup>596</sup>

### Deemed Measure Cost

The incremental cost of an ENERGY STAR griddle is assumed to be \$2,090<sup>597</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.84<sup>598</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\text{kWh}_i = [\text{LB} \times \text{E}_{\text{FOOD}} / \text{EFF}_i + \text{IDLE}_i \times (\text{HOURS}_{\text{DAY}} - \text{LB} / \text{PC}_i - \text{PRE}_{\text{TIME}} / 60) + \text{PRE}_{\text{ENERGY},i}] \times \text{DAYS}$$

$$\Delta \text{kWh} = \text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}$$

Where:

$\text{kWh}_{\text{base}}$  = the annual energy usage of the baseline equipment calculated using baseline values (where i = base for all instances of the subscript in the equation above).

---

<sup>596</sup> Food Service Technology Center (FSTC). Default value from life cycle cost calculator.

<http://www.fishnick.com/saveenergy/tools/calculators/egridcalc.php>

<sup>597</sup> New York State Energy Research and Development Agency (NYSERDA) Deemed Savings Database, Rev. 12, 2008.

<sup>598</sup> Verification of summer peak coincidence factor is pending further information from the utilities.

kWh <sub>eff</sub>	= the annual energy usage of the efficient equipment calculated using efficient values (where i = eff for all instances of the subscript in the equation above).
LB	= Pounds of food cooked per day = 100
E <sub>FOOD</sub>	= ASTM Energy to Food (kWh/lb); the amount of energy absorbed by the food during cooking, per pound of food = 0.139 <sup>599</sup>
EFF <sub>i</sub>	= Heavy Load Cooking Energy Efficiency; see table below for baseline and efficient values.
IDLE <sub>i</sub>	= Idle Energy Rate; see table below for baseline and efficient values.
HOURS <sub>DAY</sub>	= Daily operating hours = 12 <sup>600</sup>
PC <sub>i</sub>	= Production Capacity; see table below for baseline and efficient values.
PRE <sub>TIME</sub>	= Preheat time (min/day), the amount of time it takes a steamer to reach operating temperature when turned on = 15 min/day <sup>601</sup>
60	= minutes per hour
PRE <sub>ENERGY,i</sub>	= Preheat energy (kWh/day); see table below for baseline and efficient values.
DAYS	= Operating Days per year = 365

**Efficient Griddle Performance Metrics: Baseline and Efficient Values<sup>602</sup>**

Parameter	Baseline Model	Efficient Model
Idle Energy Rate (kW)	2.4	0.92
Production Capacity (lb/h)	35	46
PRE <sub>ENERGY</sub>	4	2
Heavy Load Cooking Energy Efficiency	60%	75%

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (\Delta kWh / HOURS) \times CF$$

Where:

ΔkWh	= Annual energy savings (kWh)
HOURS	= annual operating hours = HOURS <sub>DAY</sub> * DAYS = 12 * 365 = 4380
CF	= Summer Peak Coincidence Factor for measure = 0.84

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

<sup>599</sup> American Society for Testing and Materials. Industry Standard.

<sup>600</sup> Food Service Technology Center (FSTC), based on assumption that restaurant is open 12 hours a day, 365 days a year.

<sup>601</sup> FSTC (2002). *Commercial Cooking Appliance Technology Assessment*. Chapter 3: Griddles.

<sup>602</sup> An average pan width of 3 ft has been assumed based on a survey of available equipment. Baseline values based on assumptions from FSTC life cycle cost calculator. Efficient values reflect averages from a list of qualifying models found on the ENERGY STAR website (accessed June 2010)



**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Spray Nozzles for Food Service (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

All pre-rinse valves use a spray of water to remove food waste from dishes prior to cleaning in a dishwasher. They reduce water consumption, water heating cost, and waste water (sewer) charges. Pre-rinse spray valves include a nozzle, squeeze lever, and dish guard bumper. The spray valves usually have a clip to lock the handle in the “on” position. Pre-rinse valves are inexpensive and easily interchangeable with different manufacturers’ assemblies. The primary impacts of this measure will be water savings. Energy savings depend on the facility’s water heating fuel - if the facility does not have electric water heating, there are no electric savings for this measure; if the facility does not have fossil fuel water heating, there are no MMBtu savings for this measure.

### Definition of Efficient Equipment

The efficient equipment is assumed to be a pre-rinse spray valve with a flow rate of 1.6 gallons per minute, and with a cleanability performance of 26 seconds per plate or less

### Definition of Baseline Equipment

The baseline equipment is assumed to be a spray valve with a flow rate of 3 gallons per minute.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings}^{603} = \Delta \text{Water} \times \text{HOT}_{\%} \times 8.33 \times (\Delta T) \times (1/\text{EFF}) \times 10^{-6}$$

$$\text{Summer Coincident Peak kW Savings} = 0$$

$$\text{Annual MMBtu Savings}^{604} = \Delta \text{Water} \times \text{HOT}_{\%} \times 8.33 \times (\Delta T) \times (1/\text{EFF}) \times 10^{-6}$$

### Deemed Lifetime of Efficient Equipment

5 years<sup>605</sup>

### Deemed Measure Cost

The actual measure installation cost should be used (including material and labor).

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a<sup>606</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

---

<sup>603</sup> If the facility does not have electric water heating, there are no electric savings for this measure.

<sup>604</sup> If the facility does not have fossil fuel water heating, there are no MMBtu savings for this measure.

<sup>605</sup> Federal Energy Management Program (2004), *How to Buy a Low-Flow Pre-Rinse Spray Valve*. Common assumption across efficiency programs.

<sup>606</sup> No demand savings are claimed for this measure since there is insufficient peak coincident data.

## Energy Savings

If water heating is electric-based:

$$\Delta kWh = \Delta Water \times HOT\% \times 8.33 \times (\Delta T) \times (1/EFF) \times 10^{-6}$$

$\Delta Water$	= Water savings (gallons); see calculation in “Water Impact” section below.
$HOT\%$	= The percentage of water used by the pre-rinse spray valve that is heated = 69% <sup>607</sup>
8.33	= The energy content of heated water (Btu/gallon/°F)
$\Delta T$	= Temperature rise through water heater (°F) = 70 <sup>608</sup>
EFF	= Water heater thermal efficiency = 0.97 <sup>609</sup>
$10^{-6}$	= Factor to convert Btu to MMBtu

## Summer Coincident Peak Demand Savings

$$\Delta kW = 0$$

## Fossil Fuel Impact Descriptions and Calculation

If water heating is fossil fuel-based:

$$\Delta MMBtu = \Delta Water \times HOT\% \times 8.33 \times (\Delta T) \times (1/EFF) \times 10^{-6}$$

$\Delta Water$	= Water savings (gallons); see calculation in “Water Impact” section below.
$HOT\%$	= The percentage of water used by the pre-rinse spray valve that is heated = 69%
8.33	= The energy content of heated water (Btu/gallon/°F)
$\Delta T$	= Temperature rise through water heater (°F) = 70 <sup>610</sup>
EFF	= Water heater thermal efficiency = 0.58 <sup>611</sup>
$10^{-6}$	= Factor to convert Btu to MMBtu

## Water Impact Descriptions and Calculation

$$\Delta Water = (FLO_{base} - FLO_{eff}) \times 60 \times HOURS_{day} \times 365$$

$FLO_{base}$	= The flow rate of the baseline spray nozzle = 3 gallons per minute
$FLO_{eff}$	= The flow rate of the efficient equipment = 1.6 gallons per minute
60	= minutes per hour
365	= days per year
HOURS	= Hours used per day – depends on facility type as below: <sup>612</sup>

<sup>607</sup> Measures and Assumptions for DSM Planning (2009). Navigant Consulting. Prepared for the Ontario Energy Board. This factor is a candidate for future improvement through evaluation.

<sup>608</sup> Engineering judgment; assumes typical supply water temperature of 70°F and a hot water storage tank temperature of 140°F.

<sup>609</sup> IECC 2006. Performance requirement for electric resistance water heaters.

<sup>610</sup> Engineering judgment; assumes typical supply water temperature of 70°F and a hot water storage tank temperature of 140°F.

<sup>611</sup> Baseline gas water heater thermal efficiency. As submitted in the gas utilities’ *Proposed predetermined values and protocols* – submitted to the OH PUC 2009. Case no. 09-512-GE-UNC.

<sup>612</sup> Hours estimates based on *PG&E savings estimates, algorithms, sources* (2005). Food Service Pre-Rinse Spray Valves

Facility Type	Hours of Pre-Rinse Spray Valve Use per Day (HOURS)
Full Service Restaurant	4
Other	2
Limited Service (Fast Food ) Restaurant	1

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

## Refrigerated Case Covers (Time of Sale, New Construction, Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X (Program name, End Use)**)

### Description

By covering refrigerated cases the heat gain due to the spilling of refrigerated air and convective mixing with room air is reduced at the case opening. Continuous curtains can be pulled down overnight while the store is closed, yielding significant energy savings.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a refrigerated case with a continuous cover deployed during overnight periods. Characterization assumes covers are deployed for six hours daily.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a refrigerated case without a cover.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = 346.5 * \text{FEET} * \text{COP}$$

$$\text{Summer Coincident Peak kW Savings} = 0$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 5 years<sup>613</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is \$42 per linear foot of cover installed including material and labor<sup>614</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0<sup>615</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{LOAD} / 12,000) * \text{FEET} * (3.516) * \text{COP} * \text{ESF} * 8,760$$

Where:

---

<sup>613</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008.

<sup>614</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Cost Values and Summary Documentation”, California Public Utilities Commission, December 16, 2008

<[http://deerresources.com/deer0911planning/downloads/DEER2008\\_Costs\\_ValuesAndDocumentation\\_080530Rev1.zip](http://deerresources.com/deer0911planning/downloads/DEER2008_Costs_ValuesAndDocumentation_080530Rev1.zip)>

<sup>615</sup> Assumed that the continuous covers are deployed at night; therefore no demand savings occur during the peak period.

LOAD	= average refrigeration load per linear foot of refrigerated case without night covers deployed = 1,500 Btu/h <sup>616</sup> per linear foot
FEET	= linear (horizontal) feet of covered refrigerated case
12,000	= conversion factor - Btu per ton cooling.
3.516	= conversion factor – Coefficient of Performance (COP) to kW per ton.
COP	= Coefficient of Performance of the refrigerated case. = assume 2.2 <sup>617</sup> , if actual value is unknown.
ESF	= Energy Savings Factor; reflects the percent reduction in refrigeration load due to the deployment of night covers. = 9% <sup>618</sup>
8,760	= assumed annual operating hours of the refrigerated case

### Summer Coincident Peak Demand Savings

$$\Delta kW = 0^{619}$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>616</sup> Davis Energy Group, Analysis of Standard Options for Open Case Refrigerators and Freezers, May 11, 2004. Accessed on 7/7/10 < [http://www.energy.ca.gov/appliances/2003rulemaking/documents/case\\_studies/CASE\\_Open\\_Case\\_Refrig.pdf](http://www.energy.ca.gov/appliances/2003rulemaking/documents/case_studies/CASE_Open_Case_Refrig.pdf) >

<sup>617</sup> Kuiken et al, Focus on Energy Evaluation, Business Programs: Deemed Savings Manual V1.0, KEMA, March 22, 2010.

<sup>618</sup> Effects of the Low Emissivity Shields on Performance and Power Use of a Refrigerated Display Case, Southern California Edison, August 8, 1997. Accessed on 7/7/10. <[http://www.sce.com/NR/rdonlyres/2AAEFF0B-4CE5-49A5-8E2C-3CE23B81F266/0/AluminumShield\\_Report.pdf](http://www.sce.com/NR/rdonlyres/2AAEFF0B-4CE5-49A5-8E2C-3CE23B81F266/0/AluminumShield_Report.pdf)>; Characterization assumes covers are deployed for six hours daily.

<sup>619</sup> Assumed that the continuous covers are deployed at night; therefore no demand savings occur during the peak period.

## Door Heater Controls for Cooler or Freezer (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

By installing a control device to turn off door heaters when there is little or no risk of condensation, one can realize significant energy savings. There are two commercially available control strategies that achieve “on-off” control of door heaters based on either (1) the relative humidity of the air in the store or (2) the “conductivity” of the door (which drops when condensation appears). In the first strategy, the system activates your door heaters when the relative humidity in your store rises above a specific setpoint, and turns them off when the relative humidity falls below that setpoint. In the second strategy, the sensor activates the door heaters when the door conductivity falls below a certain setpoint, and turns them off when the conductivity rises above that setpoint.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a door heater control on a commercial glass door cooler or refrigerator utilizing humidity or conductivity control.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline condition is assumed to be a commercial glass door cooler or refrigerator with a standard heated door with no controls installed.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{kWbase} * \text{NUMdoors} * \text{ESF} * \text{BF}$$

$$\text{Summer Coincident Peak kW Savings} = 0$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 12 years<sup>620</sup>.

### Deemed Measure Cost

The incremental capital cost for a humidity-based control is \$300 per circuit regardless of the number of doors controlled. The incremental cost for conductivity-based controls is \$200<sup>621</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0%<sup>622</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

---

<sup>620</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Effective/Remaining Useful Life Values”, California Public Utilities Commission, December 16, 2008.

<sup>621</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>622</sup> Based on the assumption that humidity levels will most likely be relatively high during the peak period, reducing the likelihood of demand savings from door heater controls.

$$\Delta kWH = kW_{base} * NUM_{doors} * ESF * BF$$

Where:

$kW_{base}^{623}$	= connected load kW for typical reach-in refrigerator or freezer door and frame with a heater. = If actual $kW_{base}$ is unknown, assume 0.195 kW for freezers and 0.092 kW for coolers.
$NUM_{doors}$	= number of reach-in refrigerator or freezer doors controlled by sensor = Actual installed
$ESF^{624}$	= Energy Savings Factor; represents the percentage of hours annually that the door heater is powered off due to the controls. = assume 55% for humidity-based controls, 70% for conductivity-based controls
$BF^{625}$	= Bonus Factor; represents the increased savings due to reduction in cooling load inside the cases, and the increase in cooling load in the building space to cool the additional heat generated by the door heaters. = assume 1.36 for low-temp, 1.22 for medium-temp, and 1.15 for high-temp applications

### Summer Coincident Peak Demand Savings

$$\Delta kW^{626} = 0$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>623</sup> A review of TRM methodologies from Vermont, New York, Wisconsin, and Connecticut reveals several different sources for this factor. Connecticut requires site-specific information, whereas New York's characterization does not explicitly identify the  $kW_{base}$ . Connecticut and Vermont provide values that are very consistent, and the simple average of these two values has been used for the purposes of this characterization.

<sup>624</sup> A review of TRM methodologies from Vermont, New York, Wisconsin, and Connecticut reveals several different estimates of ESF. Vermont is the only TRM that provides savings estimates dependent on the control type. Additionally, these estimates are the most conservative of all TRMs reviewed. These values have been adopted for the purposes of this characterization.

<sup>625</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>626</sup> Based on the assumption that humidity levels will most likely be relatively high during the peak period, reducing the likelihood of demand savings from door heater controls.



## ENERGY STAR Ice Machine (Time of Sale, New Construction)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a new ENERGY STAR qualified commercial ice machine. The ENERGY STAR label applied to air-cooled, cube-type machines including ice-making head, self-contained, and remote-condensing units. This measure could relate to the replacing of an existing unit at the end of its useful life, or the installation of a new system in a new or existing building.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a commercial ice machine meeting the minimum ENERGY STAR efficiency level standards.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a commercial ice machine meeting federal equipment standards established January 1, 2010.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = [(\text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}) / 100] \times (0.40 \times H) \times 365$$

$$\text{Summer Coincident Peak kW Savings} = \text{Annual kWh Savings} / (8760 \times 0.40) \times 0.772$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 9 years<sup>627</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is provided below.<sup>628</sup>

Harvest Rate (H)	Incremental Cost
100-200 lb ice machine	\$296
201-300 lb ice machine	\$312
301-400 lb ice machine	\$559
401-500 lb ice machine	\$981
501-1000 lb ice machine	\$1,485
1001-1500 lb ice machine	\$1,821
>1500 lb ice machine	\$2,194

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 77.2%<sup>629</sup>.

<sup>627</sup> The following report estimates life of a commercial ice-maker at 7-10 years: *Energy Savings Potential for Commercial Refrigeration Equipment*, Arthur D. Little, Inc., 1996.

<sup>628</sup> These values are from electronic work papers prepared in support of San Diego Gas & Electric's "Application for Approval of Electric and Gas Energy Efficiency Programs and Budgets for Years 2009-2011", SDGE, March 2, 2009. Accessed on 7/7/10 <<http://www.sdge.com/regulatory/documents/ee2009-2011Workpapers/SW-ComB/Food%20Service/Food%20Service%20Electric%20Measure%20Workpapers%2011-08-05.DOC>>.

<sup>629</sup> Assumes that the summer peak coincidence factor for commercial ice machines is consistent with that of general commercial refrigeration equipment. Characterization assumes a value of 77.2% adopted from the Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010, until a region specific study is conducted.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = [(\text{kWh}_{\text{base}} - \text{kWh}_{\text{ee}}) / 100] * (\text{DC} * \text{H}) * 365$$

Where:

$\text{kWh}_{\text{base}}$  = maximum kWh consumption per 100 pounds of ice for the baseline equipment  
= calculated as shown in the table below using the actual Harvest Rate (H) of the efficient equipment.

$\text{kWh}_{\text{ee}}$  = maximum kWh consumption per 100 pounds of ice for the efficient equipment  
= calculated as shown in the table below using the actual Harvest Rate (H) of the efficient equipment.

Ice Machine Type	$\text{kWh}_{\text{base}}^{630}$	$\text{kWh}_{\text{ee}}^{631}$
Ice Making Head ( $H < 450$ )	$10.26 - 0.0086 * H$	$9.23 - 0.0077 * H$
Ice Making Head ( $H \geq 450$ )	$6.89 - 0.0011 * H$	$6.20 - 0.0010 * H$
Remote Condensing Unit, without remote compressor ( $H < 1000$ )	$8.85 - 0.0038 * H$	$8.05 - 0.0035 * H$
Remote Condensing Unit, without remote compressor ( $H \geq 1000$ )	5.1	4.64
Remote Condensing Unit, with remote compressor ( $H < 934$ )	$8.85 - 0.0038 * H$	$8.05 - 0.0035 * H$
Remote Condensing Unit, with remote compressor ( $H \geq 934$ )	5.3	4.82
Self Contained Unit ( $H < 175$ )	$18 - 0.0469 * H$	$16.7 - 0.0436 * H$
Self Contained Unit ( $H \geq 175$ )	9.8	9.11

100 = conversion factor to convert  $\text{kWh}_{\text{base}}$  and  $\text{kWh}_{\text{ee}}$  into maximum kWh consumption per pound of ice.

DC = Duty Cycle of the ice machine  
=  $0.40^{632}$

H = Harvest Rate (pounds of ice made per day)  
= Actual installed

365 = days per year

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / (\text{HOURS} * \text{DC}) * \text{CF}$$

---

<sup>630</sup> Baseline reflects federal standards which apply to units manufactured on or after January 1, 2010

<<http://ecfr.gpoaccess.gov/cgi/t/text/text-idx?c=ecfr&rgn=div6&view=text&node=10:3.0.1.4.17.8&idno=10>>.

<sup>631</sup> ENERGY STAR Program Requirements for Commercial Ice Machines, Partner Commitments, U.S. Environmental Protection Agency, Accessed on 7/7/10 <[http://www.energystar.gov/ia/partners/product\\_specs/program\\_reqs/ice\\_machine\\_prog\\_req.pdf](http://www.energystar.gov/ia/partners/product_specs/program_reqs/ice_machine_prog_req.pdf)>

<sup>632</sup> Duty cycle varies considerably from one installation to the next. TRM assumptions from Vermont, Wisconsin, and New York vary from 40 to 57%, whereas the ENERGY STAR Commercial Ice Machine Savings Calculator <[http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_Ice\\_Machines.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_Ice_Machines.xls)> assumes a value of 75%. A field study of eight ice machines in California indicated an average duty cycle of 57% ("A Field Study to Characterize Water and Energy Use of Commercial Ice-Cube Machines and Quantify Saving Potential", Food Service Technology Center, December 2007). Furthermore, a report prepared by ACEEE assumed a value of 40% (Nadel, S., Packaged Commercial Refrigeration Equipment: A Briefing Report for Program Planners and Implementers, ACEEE, December 2002). For conservatism, this characterization assumed a value of 40%.

Where:

HOURS	= annual operating hours = 8760 <sup>633</sup>
CF	= Summer Peak Coincidence Factor for measure = 0.772 <sup>634</sup>

#### **Fossil Fuel Impact Descriptions and Calculation**

n/a

#### **Water Impact Descriptions and Calculation**

While the ENERGY STAR labeling criteria require that certified commercial ice machines meet certain “maximum potable water use per 100 pounds of ice made” requirements, such requirements are intended to prevent equipment manufacturers from gaining energy efficiency at the cost of water consumptions. A review of the AHRI Certification Directory<sup>635</sup> indicates that approximately 81% of air-cooled, cube-type machines meet the ENERGY STAR potable water use requirement. Therefore, there are no assumed water impacts for this measure.

#### **Deemed O&M Cost Adjustment Calculation**

n/a

#### **Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>633</sup> Unit is assumed to be connected to power 24 hours per day, 365 days per year.

<sup>634</sup> Assumes that the summer peak coincidence factor for commercial ice machines is consistent with that of general commercial refrigeration equipment. Characterization assumes a value of 77.2% adopted from the Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010, until a region specific study is conducted.

<sup>635</sup> AHRI Certification Directory, Accessed on 7/7/10. <<http://www.ahridirectory.org/ahridirectory/pages/home.aspx>>

## Commercial Solid Door Refrigerators & Freezers (Time of Sale, New Construction)

**Official Measure Code** (Measure Number: **X-X-X-X** (Program name, End Use))

### Description

This measure relates to the installation of a new reach-in commercial refrigerator or freezer meeting ENERGY STAR efficiency standards. ENERGY STAR labeled commercial refrigerators and freezers are more energy efficient because they are designed with components such as ECM evaporator and condenser fan motors, hot gas anti-sweat heaters, or high-efficiency compressors, which will significantly reduce energy consumption. This measure could relate to the replacing of an existing unit at the end of its useful life, or the installation of a new system in a new or existing building.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a solid or glass door refrigerator or freezer meeting the minimum ENERGY STAR efficiency level standards.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a solid or glass door refrigerator or freezer meeting the minimum federal manufacturing standards as specified by the Energy Policy Act of 2005.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}) * 365$$

$$\text{Summer Coincident Peak kW Savings} = \text{Annual kWh Savings} / \text{HOURS} * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 12 years<sup>636</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is provided below<sup>637</sup>.

Type	Refrigerator Incremental Cost	Freezer Incremental Cost
<b>Solid or Glass Door</b>		
$0 < V < 15$	\$143	\$142
$15 \leq V < 30$	\$164	\$166
$30 \leq V < 50$	\$164	\$166
$V \geq 50$	\$249	\$407

<sup>636</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Effective/Remaining Useful Life Values", California Public Utilities Commission, December 16, 2008.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>637</sup> Estimates of the incremental cost of commercial refrigerators and freezers varies widely by source. Nadel, S., Packaged Commercial Refrigeration Equipment: A Briefing Report for Program Planners and Implementers, ACEEE, December 2002, indicates that incremental cost is approximately zero. Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010, assumed incremental cost ranging from \$75 to \$125 depending on equipment volume. ACEEE notes that incremental cost ranges from 0 to 10% of the baseline unit cost <[http://www.aceee.org/ogeece/ch5\\_reach.htm](http://www.aceee.org/ogeece/ch5_reach.htm)>. For the purposes of this characterization, assume and incremental cost adder of 5% on the full unit costs presented in Goldberg et al, State of Wisconsin Public Service Commission of Wisconsin, Focus on Energy Evaluation, Business Programs: Incremental Cost Study, KEMA, October 28, 2009.

## Deemed O&M Cost Adjustments

n/a

## Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 100%<sup>638</sup>.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{kWh}_{\text{base}} - \text{kWh}_{\text{eff}}) * 365$$

Where:

$\text{kWh}_{\text{base}}$  = baseline maximum daily energy consumption in kWh  
= calculated using actual chilled or frozen compartment volume (V) of the efficient unit as shown in the table below.

Type	$\text{kWh}_{\text{base}}$ <sup>639</sup>
Solid Door Refrigerator	$0.10 * V + 2.04$
Glass Door Refrigerator	$0.12 * V + 3.34$
Solid Door Freezer	$0.40 * V + 1.38$
Glass Door Freezer	$0.75 * V + 4.10$

$\text{kWh}_{\text{eff}}$ <sup>640</sup> = efficient maximum daily energy consumption in kWh  
= calculated using actual chilled or frozen compartment volume (V) of the efficient unit as shown in the table below.

Type	Refrigerator kWh <sub>eff</sub>	Freezer kWh <sub>eff</sub>
<b>Solid Door</b>		
$0 < V < 15$	$\leq 0.089V + 1.411$	$\leq 0.250V + 1.250$
$15 \leq V < 30$	$\leq 0.037V + 2.200$	$\leq 0.400V - 1.000$
$30 \leq V < 50$	$\leq 0.056V + 1.635$	$\leq 0.163V + 6.125$
$V \geq 50$	$\leq 0.060V + 1.416$	$\leq 0.158V + 6.333$
<b>Glass Door</b>		
$0 < V < 15$	$\leq 0.118V + 1.382$	$\leq 0.607V + 0.893$
$15 \leq V < 30$	$\leq 0.140V + 1.050$	$\leq 0.733V - 1.000$
$30 \leq V < 50$	$\leq 0.088V + 2.625$	$\leq 0.250V + 13.500$
$V \geq 50$	$\leq 0.110V + 1.500$	$\leq 0.450V + 3.500$

V = the chilled or frozen compartment volume (ft<sup>3</sup>) (as defined in the Association of Home Appliance Manufacturers Standard HRF1-1979)

= Actual installed

365 = days per year

<sup>638</sup> The Summer Peak Coincidence Factor is assumed to equal 1.0, since the annual kWh savings is divided by the total annual hours (8760), effectively resulting in the average kW reduction during the peak period.

<sup>639</sup> Energy Policy Act of 2005. Accessed on 7/7/10. <[http://www.epa.gov/oust/fedlaws/publ\\_109-058.pdf](http://www.epa.gov/oust/fedlaws/publ_109-058.pdf)>

<sup>640</sup> ENERGY STAR Program Requirements for Commercial Refrigerators and Freezers Partner Commitments Version 2.0, U.S. Environmental Protection Agency, Accessed on 7/7/10. <[http://www.energystar.gov/ia/partners/product\\_specs/program\\_reqs/commer\\_refrig\\_glass\\_prog\\_req.pdf](http://www.energystar.gov/ia/partners/product_specs/program_reqs/commer_refrig_glass_prog_req.pdf)>

### Summer Coincident Peak Demand Savings

$$\Delta kW = \Delta kWh / \text{HOURS} * CF$$

Where:

HOURS = equipment is assumed to operate continuously, 24 hours per day, 365 days per year.  
= 8760  
CF = Summer Peak Coincidence Factor for measure  
= 1.0<sup>641</sup>

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

<sup>641</sup> The Summer Peak Coincidence Factor is assumed to equal 1.0, since the annual kWh savings is divided by the total annual hours (8760), effectively resulting in the average kW reduction during the peak period.

## Strip Curtain for Walk-in Coolers and Freezers (New Construction, Retrofit – New Equipment, Retrofit – Early Replacement)

**Official Measure Code** (Measure Number: **X-X-X-X** (Program name, End Use))

### Description

This commercial measure pertains to the installation of infiltration barriers (strip curtains) on walk-in coolers or freezers. Strip curtains impede heat transfer from adjacent warm and humid spaces into walk-ins when the main door is opened, thereby reducing the cooling load. As a result, compressor run time and energy consumption are reduced. The engineering assumption is that walk-in door is open 2.5 hours per day every day, and the strip curtain covers the entire door frame. Eligible applications include new construction and retrofit.

### Definition of Efficient Equipment

The efficient equipment is a polyethylene strip curtain added to a walk-in cooler or freezer.

### Definition of Baseline Equipment

The baseline assumption is a walk-in cooler or freezer that previously had either no strip curtain installed or an old, ineffective strip curtain installed.

### Deemed Savings for this Measure

Annual kWh Savings <sup>642</sup>	= 2,974 for freezers = 422 for coolers
Summer Coincident Peak kW Savings	= 0.34 for freezers = 0.05 for coolers

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 6 years<sup>643</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure is \$10.22 per square foot of door opening (includes material and labor)<sup>644</sup>.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is 100%<sup>645</sup>.

---

<sup>642</sup> Values based on analysis prepared by ADM for FirstEnergy utilities in Pennsylvania, provided via personal communication with Diane Rapp of FirstEnergy on June 4, 2010. Based on a review of deemed savings assumptions and methodologies from Oregon and California, the values from Pennsylvania appear reasonable and are the most applicable to the Ohio climate.

<sup>643</sup> M. Goldberg, J. Ryan Barry, B. Dunn, M. Ackley, J. Robinson, and D. Deangelo-Woolsey, KEMA. "Focus on Energy: Business Programs – Measure Life Study", August 2009.

<sup>644</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Cost Values and Summary Documentation", California Public Utilities Commission, December 16, 2008

<sup>645</sup> The summer coincident peak demand reduction is assumed as the total annual savings divided by the total number of hours per year, effectively assuming the average demand reduction is realized during the peak period. This is a reasonable assumption for refrigeration savings.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = 2,974 \text{ for freezers}$$
$$= 422 \text{ for coolers}$$

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / 8760 * \text{CF}$$
$$= 0.35 \text{ for freezers}$$
$$= 0.05 \text{ for coolers}$$

Where:

$$8760 = \text{hours per year}$$
$$\text{CF} = \text{Summer Peak Coincidence Factor for the measure}$$
$$= 1.0$$

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)



## Motors (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Three phase Open Drip Proof (ODP) and Totally Enclosed Fan-Cooled (TEFC) motors of at least 1 horsepower (HP) and less than or equal to 200 HP.

### Definition of Efficient Equipment

The efficient equipment is motors meeting the minimum efficiency levels of NEMA premium efficiency motors.

### Definition of Baseline Equipment

For 2010, the baseline equipment assumes motors that meet the minimum efficiency allowed under the Federal Energy Policy Act of 1992 (EPACT). While EPACT generally reflects the floor of efficiencies available, most manufacturers produce models just meeting EPACT, and these are the most commonly purchased among customers not choosing high efficiency. Refer to the table of Baseline Motor Efficiencies in the reference table section.

For 2011, NEMA premium efficiency motors are becoming the new baseline. The Energy Independence and Security Act of 2007 (EISA) requires that general purpose motors (subtype I) manufactured after Dec. 19, 2010, from 1 to 200 HP, inclusive, shall have a nominal full-load efficiency that is not less than as defined in NEMA MG 1-2006 Table 12-12 ("NEMA Premium" efficiency levels)<sup>646</sup>. Therefore, it is not anticipated that time-of-sale NEMA premium efficient motors will provide savings in 2011.

### Deemed Savings for this Measure

$$\text{Annual kWh Savings} = 0.746 \times [(\text{hp}_{\text{base}} \times \text{RLF}_{\text{base}})/\eta_{\text{base}} - (\text{hp}_{\text{ee}} \times \text{RLF}_{\text{ee}})/\eta_{\text{ee}}]$$

$$\text{Summer Coincident Peak kW Savings} = \Delta \text{kW} \times \text{CF}$$

### Deemed Lifetime of Efficient Equipment

16 years<sup>647</sup>

### Deemed Measure Cost

See 'Incremental Costs for Efficient Motors' in the Reference Table section below

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0.38

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \Delta \text{kW} \times \text{EFLH}$$

---

<sup>646</sup> NEMA Premium Efficiency Levels Adopted as Federal Motor Efficiency Performance Standards, NEMA press release, March 27, 2008, <http://www.nema.org/media/pr/20080327a.cfm>, accessed on August 5, 2010.

<sup>647</sup> PA Consulting Group, Inc. (2009). *Business Programs: Measure Life Study*. Prepared for State of Wisconsin Public Service Commission

Where:

EFLH = Equivalent Full Load Hours  
= site specific variable, either collected on a per unit basis, or calculated using building type and location

### Summer Coincident Peak Demand Savings

$$\Delta kW = 0.746 \times [(hp_{base} \times RLF_{base})/\eta_{base} - (hp_{ee} \times RLF_{ee})/\eta_{ee}]$$

$$kW = \Delta kW \times CF$$

Where:

hp<sub>ee</sub> = Rated horsepower of the efficient motor  
= Nameplate  
hp<sub>base</sub> = Rated horsepower of baseline motor  
= same as the efficient motor  
RLF<sub>base</sub> = Rated load factor of baseline motor  
= 0.75<sup>648</sup>  
RLF<sub>ee</sub> = Rated load factor of efficient motor  
= Nameplate  
η<sub>base</sub> = Efficiency of baseline motor  
= see 'Baseline Motor Efficiencies (EPACT)' below  
η<sub>eff</sub> = Efficiency of efficient motor  
= nameplate, must meet or exceed efficiency levels in table 'Efficient Motor Efficiencies (NEMA Premium)' found below  
0.746 = the conversion factor kW/hp  
CF = Peak coincidence factor  
= 0.38<sup>649</sup>

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

Baseline Motor Efficiencies (EPACT)

Size HP	Open Drip Proof (ODP) # of Poles			Totally Enclosed Fan-Cooled (TEFC)		
	6	4	2	6	4	2
	Speed (RPM)			Speed (RPM)		
	1200	1800	3600	1200	1800	3600
1	80.0%	82.5%	75.5%	80.0%	82.5%	75.5%
1.5	84.0%	84.0%	82.5%	85.5%	84.0%	82.5%
2	85.5%	84.0%	84.0%	86.5%	84.0%	84.0%
3	86.5%	86.5%	84.0%	87.5%	87.5%	85.5%
5	87.5%	87.5%	85.5%	87.5%	87.5%	87.5%
7.5	88.5%	88.5%	87.5%	89.5%	89.5%	88.5%
10	90.2%	89.5%	88.5%	89.5%	89.5%	89.5%

<sup>648</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February, 19, 2010

<sup>649</sup> JCP&L metered data

Size HP	Open Drip Proof (ODP)			Totally Enclosed Fan-Cooled (TEFC)		
	# of Poles			# of Poles		
	6	4	2	6	4	2
	Speed (RPM)			Speed (RPM)		
	1200	1800	3600	1200	1800	3600
15	90.2%	91.0%	89.5%	90.2%	91.0%	90.2%
20	91.0%	91.0%	90.2%	90.2%	91.0%	90.2%
25	91.7%	91.7%	91.0%	91.7%	92.4%	91.0%
30	92.4%	92.4%	91.0%	91.7%	92.4%	91.0%
40	93.0%	93.0%	91.7%	93.0%	93.0%	91.7%
50	93.0%	93.0%	92.4%	93.0%	93.0%	92.4%
60	93.6%	93.6%	93.0%	93.6%	93.6%	93.0%
75	93.6%	94.1%	93.0%	93.6%	94.1%	93.0%
100	94.1%	94.1%	93.0%	94.1%	94.5%	93.6%
125	94.1%	94.5%	93.6%	94.1%	94.5%	94.5%
150	94.5%	95.0%	93.6%	95.0%	95.0%	94.5%
200	94.5%	95.0%	94.5%	95.0%	95.0%	95.0%

Efficient Motor Efficiencies (NEMA Premium)

Size HP	Open Drip Proof (ODP)			Totally Enclosed Fan-Cooled (TEFC)		
	# of Poles			# of Poles		
	2	4	6	2	4	6
	Speed (RPM)			Speed (RPM)		
	1200	1800	3600	1200	1800	3600
1	82.50%	85.50%	77.00%	82.50%	85.50%	77.00%
1.5	86.50%	86.50%	84.00%	87.50%	86.50%	84.00%
2	87.50%	86.50%	85.50%	88.50%	86.50%	85.50%
3	88.50%	89.50%	85.50%	89.50%	89.50%	86.50%
5	89.50%	89.50%	86.50%	89.50%	89.50%	88.50%
7.5	90.20%	91.00%	88.50%	91.00%	91.70%	89.50%
10	91.70%	91.70%	89.50%	91.00%	91.70%	90.20%
15	91.70%	93.00%	90.20%	91.70%	92.40%	91.00%
20	92.40%	93.00%	91.00%	91.70%	93.00%	91.00%
25	93.00%	93.60%	91.70%	93.00%	93.60%	91.70%
30	93.60%	94.10%	91.70%	93.00%	93.60%	91.70%
40	94.10%	94.10%	92.40%	94.10%	94.10%	92.40%
50	94.10%	94.50%	93.00%	94.10%	94.50%	93.00%
60	94.50%	95.00%	93.60%	94.50%	95.00%	93.60%
75	94.50%	95.00%	93.60%	94.50%	95.40%	93.60%
100	95.00%	95.40%	93.60%	95.00%	95.40%	94.10%
125	95.00%	95.40%	94.10%	95.00%	95.40%	95.00%
150	95.40%	95.80%	94.10%	95.80%	95.80%	95.00%
200	95.40%	95.80%	95.00%	95.80%	96.20%	95.40%

Incremental Costs for Efficient Motors<sup>650</sup>

Size HP	Open Drip- Proof (ODP)	Totally Enclosed Fan-Cooled (TEFC)
	Incremental Cost	Incremental Cost
1	\$52	\$52
1.5	\$60	\$60
2	\$61	\$61
3	\$54	\$54
5	\$63	\$63
7.5	\$123	\$123
10	\$116	\$116
15	\$115	\$115
20	\$115	\$115
25	\$201	\$201
30	\$231	\$231
40	\$249	\$249
50	\$273	\$273
60	\$431	\$431
75	\$554	\$554
100	\$658	\$658
125	\$841	\$841
150	\$908	\$908
200	\$964	\$964

**Version Date & Revision History**

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>650</sup> Xenergy (2001). *Motor Up! Program Evaluation and Market Assessment*

## High Efficiency Pumps and Pumping Efficiency Improvements (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Pump improvements can be done to optimize the design and control of water pumping systems. The measurement of energy and demand savings for commercial and industrial applications will vary with the type of pumping technology, operating hours, efficiency and current and proposed controls. Depending on the specific application, slowing the pump, trimming or replacing the impeller, or replacing the pump may suitable options for improving pumping efficiency.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be an optimized pumping system meeting applicable program efficiency requirements.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a non-optimized existing pumping system.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings}^{651} = (\text{HP}_{\text{motor}} * \text{LF} * 0.746 / \eta_{\text{motor}}) * \text{HOURS} * (\text{ESF} / \eta_{\text{pump}})$$

$$\text{Summer Coincident Peak kW Savings} = (\text{HP}_{\text{motor}} * \text{LF} * 0.746 / \eta_{\text{motor}}) * (\text{ESF} / \eta_{\text{pump}}) * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 10 years<sup>652</sup>.

### Deemed Measure Cost

The incremental capital cost for this measure can vary considerably depending upon the strategy employed to achieve the required efficiency levels and should be determined on a site-specific basis.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 38%<sup>653</sup>.

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{HP}_{\text{motor}} * \text{LF} * 0.746 / \eta_{\text{motor}}) * \text{HOURS} * (\text{ESF} / \eta_{\text{pump}})$$

Where:

---

<sup>651</sup> Improving Pumping System Performance: A Sourcebook for Industry, Second Edition, U.S. Department of Energy, May 2006

<sup>652</sup> Martin, N. et al., Emerging Energy-Efficient Industrial Technologies: New York State Edition, American Council for an Energy Efficient Economy (ACEEE), March 2001

<sup>653</sup> Summer Peak Coincidence Factor has been preserved from the “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009. This is likely a conservative estimate, but is recommended for further study.

$HP_{motor}$  = nameplate motor horsepower  
 = Actual installed  
 $LF$  = Load Factor; Ratio of the peak running load to the nameplate rating of the motor. If unknown, assume a value of 80%<sup>654</sup>.  
 $0.746$  = conversion factor from horse-power to kW (kW/hp)  
 $\eta_{motor}$  = Motor efficiency; if actual motor efficiency at typical pump operating conditions is unknown, assume the federal minimum efficiency requirements as below:

Size HP	Open Drip Proof (ODP)			Totally Enclosed Fan-Cooled (TEFC)		
	# of Poles					
	6	4	2	6	4	2
	Speed (RPM)			Speed (RPM)		
	1200	1800	3600	1200	1800	3600
1	80.0%	82.5%	75.5%	80.0%	82.5%	75.5%
1.5	84.0%	84.0%	82.5%	85.5%	84.0%	82.5%
2	85.5%	84.0%	84.0%	86.5%	84.0%	84.0%
3	86.5%	86.5%	84.0%	87.5%	87.5%	85.5%
5	87.5%	87.5%	85.5%	87.5%	87.5%	87.5%
7.5	88.5%	88.5%	87.5%	89.5%	89.5%	88.5%
10	90.2%	89.5%	88.5%	89.5%	89.5%	89.5%
15	90.2%	91.0%	89.5%	90.2%	91.0%	90.2%
20	91.0%	91.0%	90.2%	90.2%	91.0%	90.2%

HOURS = annual operating hours of the pump  
 = Actual installed  
 $ESF$  = Energy Savings Factor; assume a value of 15%<sup>655</sup>.  
 $\eta_{pump}$  = Pump efficiency at design point; if actual pump efficiency is unknown, assume program compliance efficiency as below:

HP	Minimum Pump Efficiency at Design Point ( $\eta_{pump}$ )
1.5	65%
2	65%
3	67%
5	70%
7.5	73%
10	75%
15	77%
20	77%

#### Summer Coincident Peak Demand Savings

$$\Delta kW = (HP_{motor} * LF * 0.746 / \eta_{motor}) * (ESF / \eta_{pump}) * CF$$

Where:

$CF$  = Summer Peak Coincidence Factor for measure  
 = 0.38<sup>656</sup>

<sup>654</sup> In many applications, the pump/motor assembly is oversized. For analysis purposes, a typical 80% load factor is assumed; however, this assumption should be verified through evaluation if significant savings are realized through prescriptive pumping efficiency improvements.

<sup>655</sup> Published estimates of typical pumping efficiency improvements range from 10 to 20%. For analysis purposes, assume 15%. Martin, N. et al., Emerging Energy-Efficient Industrial Technologies: New York State Edition, American Council for an Energy Efficient Economy (ACEEE), March 2001.

<sup>656</sup> Summer Peak Coincidence Factor has been preserved from the "Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC", October 15, 2009. This is likely a conservative estimate, but is recommended for further study.

**Fossil Fuel Impact Descriptions and Calculation**

n/a

**Water Impact Descriptions and Calculation**

n/a

**Deemed O&M Cost Adjustment Calculation**

n/a

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Efficient Air Compressors (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of an air compressor with a variable frequency drive, load/no load controls, or variable displacement controls. Baseline compressors choke off the inlet air to modulate the compressor output, which is not efficient. Efficient compressors use less energy at part load conditions. Demand curves are as per DOE data for a Variable Speed compressor versus a Modulating compressor. This measure could relate to the replacing of an existing unit at the end of its useful life, or the installation of a new system in a new building (i.e. time of sale).

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be an air compressor with a variable frequency drive, load/no load controls<sup>657</sup>, or variable displacement controls.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a modulating air compressor with blow down.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = \text{BHP} * 0.746 / \eta_{\text{motor}} * \text{HOURS} * \text{ESF}$$

$$\text{Summer Coincident Peak kW Savings} = \text{Annual kWh Savings} / \text{HOURS} * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 15 years<sup>658</sup>.

### Deemed Measure Cost

The incremental capital costs for this measure should be determined on a case-by-case basis. For analysis purposes, assume the incremental costs specified below:

Compressor Type	Incremental Cost <sup>659</sup>
Load/No Load	\$200/hp
Variable Displacement	\$250/hp
Variable Frequency Drive	\$300/hp

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 38%<sup>660</sup>.

<sup>657</sup> For analysis purposes, it is assumed that the compressed air system with load / no load controls utilizes an air receiver with a storage capacity of 5 gallons per cubic foot per minute of compressor capacity.

<sup>658</sup> Based on a review of TRM assumptions from Vermont, New Hampshire, Massachusetts, and Wisconsin. Estimates range from 10 to 15 years.

<sup>659</sup> Incremental cost estimates have been maintained from the “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009, and appear reasonable. However, future study of these estimates is recommended as published estimates of incremental costs for efficient air compressors are scarce.

<sup>660</sup> Summer Peak Coincidence Factor has been preserved from the “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009. This is likely a conservative estimate, but is recommended for further study.



---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{BHP} * 0.746 / \eta_{\text{motor}} \times \text{HOURS} \times \text{ESF}$$

Where:

BHP	= compressor motor full load brake horse-power = Actual installed
0.746	= conversion factor from horse-power to kW (kW/hp)
$\eta_{\text{motor}}$	= compressor motor nameplate efficiency = Actual installed (if actual efficiency is unknown, assume 90% <sup>661</sup> )
HOURS	= compressor total hours of operation = Actual installed
ESF	= Energy Savings Factor; dependent on compressor control type as below:

Control Type	Energy Savings Factor (ESF) <sup>662</sup>
Load/No Load	10%
Variable Displacement	17%
Variable Frequency Drive	26%

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = \Delta \text{kWh} / \text{HOURS} * \text{CF}$$

Where:

CF	= Summer Peak Coincidence Factor for measure = 0.38 <sup>663</sup>
----	---

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

**Referenced Documents:** “BHP Weighted Compressed Air Load Profiles – OH TRM.xls”

---

<sup>661</sup> Improving Compressed Air System Performance: A Sourcebook for Industry, U.S. Department of Energy, November 2003.

<sup>662</sup> Energy Savings Factors were developed using U.S. Department of Energy part load data for different compressor control types as well as load profiles from 50 facilities employing air compressors. See “BHP Weighted Compressed Air Load Profiles – OH TRM.xls” for source data and calculations.

<sup>663</sup> Summer Peak Coincidence Factor has been preserved from the “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009. This is likely a conservative estimate, but is recommended for further study.

## Vending Machine Occupancy Sensors (Time of Sale, New Construction, Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X** (Program name, End Use))

### Description

This measure relates to the installation of new controls on refrigerated beverage vending machines, non-refrigerated snack vending machines, and glass front refrigerated coolers. Controls can significantly reduce the energy consumption of vending machine and refrigeration systems. Qualifying controls must power down these systems during periods of inactivity but, in the case of refrigerated machines, must always maintain a cool product that meets customer expectations. This measure relates to the installation of a new control on a new or existing unit. This measure should **not** be applied to ENERGY STAR qualified vending machines, as they already have built-in controls.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a standard efficiency refrigerated beverage vending machine, non-refrigerated snack vending machine, or glass front refrigerated cooler with a control system capable of powering down lighting and refrigeration systems during periods of inactivity.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a standard efficiency refrigerated beverage vending machine, non-refrigerated snack vending machine, or glass front refrigerated cooler without a control system capable of powering down lighting and refrigeration systems during periods of inactivity.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = 8760 \times \text{WATTS}_{\text{base}} / 1000 \times \text{ESF}$$

$$\text{Summer Coincident Peak kW Savings} = 0$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 5 years<sup>664</sup>.

### Deemed Measure Cost

The actual measure installation cost should be used (including material and labor), but the following can be assumed for analysis purposes<sup>665</sup>:

Refrigerated Vending Machine: \$215.50

Non-Refrigerated Vending Machine: \$108.00

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 0<sup>666</sup>.

---

<sup>664</sup> Measure Life Study, prepared for the Massachusetts Joint Utilities, Energy & Resource Solutions, November 2005.

<sup>665</sup> 2005 Database for Energy-Efficiency Resources (DEER), Version 2005.21. "Cost Data for Supporting Documents."

<sup>666</sup> Assumed that the peak period is coincident with periods of high traffic diminishing the demand reduction potential of occupancy based controls.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \text{WATTSbase} / 1000 * \text{HOURS} * \text{ESF}$$

Where:

WATTSbase = connected kW of the controlled equipment; see table below for default values by connected equipment type:

Equipment Type	WATTSbase <sup>667</sup>
Refrigerated Beverage Vending Machines	400
Non-Refrigerated Snack Vending Machines	85
Glass Front Refrigerated Coolers	460

1000 = conversion factor (W/kW)

HOURS = operating hours of the connected equipment; assumed that the equipment operates 24 hours per day, 365 days per year  
= 8760

ESF = Energy Savings Factor; represents the percent reduction in annual kWh consumption of the equipment controlled; see table below for default values:

Equipment Type	Energy Savings Factor (ESF) <sup>668</sup>
Refrigerated Beverage Vending Machines	46%
Non-Refrigerated Snack Vending Machines	46%
Glass Front Refrigerated Coolers	30%

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW}^{669} = 0$$

#### Fossil Fuel Impact Descriptions and Calculation

n/a

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

---

<sup>667</sup> USA Technologies Energy Management Product Sheets, July 2006; cited September 2009. <[http://www.usatech.com/energy\\_management/energy\\_productsheets.php](http://www.usatech.com/energy_management/energy_productsheets.php)>

<sup>668</sup> Ibid.

<sup>669</sup> Assumed that the peak period is coincident with periods of high traffic diminishing the demand reduction potential of occupancy based controls.

## Heat Pump Water Heaters (New Construction, Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure relates to the installation of a heat pump water heater (HPWH) in place of a standard electric water heater. HPWHs can be added to existing domestic hot water (DHW) systems to improve the overall efficiency. HPWHs utilize refrigerants (like an air source heat pump) and have much higher coefficients of performance (COP) than standard electric water heaters. HPWHs remove waste heat from surrounding air sources and preheat the DHW supply system. HPWHs come in a variety of sizes and the size of HPWH will depend on the desired temperature output and amount of hot water needed by application. The savings from water heater heat pumps will depend on the design, size (capacity), water heating requirements, building application and climate. This measure could relate to either a retrofit or a new installation.

### Definition of Efficient Equipment

In order for this characterization to apply, the efficient equipment is assumed to be a heat pump water heater with or without an auxiliary water heating system.

### Definition of Baseline Equipment

In order for this characterization to apply, the baseline equipment is assumed to be a standard electric storage tank-type water heater with a thermal efficiency of 98%. This measure does **not** apply to natural gas-fired water heaters.

### Deemed Calculation for this Measure

$$\text{Annual kWh Savings} = (\text{GPD} * 365 * 8.33 * \Delta T_s) / (3413) * [(1/E_{t,\text{base}}) - (1/\text{COP})]$$

$$\text{Summer Peak Coincident kW Savings} = (\text{GPH} * 8.33 * \Delta T_s) / (3413) * [(1/E_{t,\text{base}}) - (1/\text{COP})] * \text{CF}$$

### Deemed Lifetime of Efficient Equipment

The expected measure life is assumed to be 10 years<sup>670</sup>.

### Deemed Measure Cost

Due to the complexity of heat pump water heater systems, incremental capital costs should be determined on a case-by-case basis. High capacity heat pump water heaters will typically have a supplemental heating source such as an electric resistance heater. For new construction applications, the incremental capital cost for this measure should be calculated as the difference in installed cost of the entire heat pump water heater system including any auxiliary heating systems and a standard electric storage tank water heater of comparable capacity. For retrofit applications, the total installed cost of heat pump water heater should be used.

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

The summer peak coincidence factor for this measure is assumed to be 6%<sup>671</sup>.

---

<sup>670</sup> Estimates of measure life from utilities in the Northeast and the U.S. Department of Energy vary from 10 to 15 years. Assume 10 years as a conservative estimate.

<http://www.ctsavesenergy.org/files/Measure%20Life%20Report%202007.pdf>

<sup>671</sup> "Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC", October 15, 2009. Based on Ohio utility supply profiles.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWH} = (\text{GPD} * 365 * 8.33 * \Delta T_s) / (3413) * [(1/E_{t,\text{base}}) - (1/\text{COP})]$$

Where:

GPD	= average daily water consumption (gallons/day); determined from site-specific data.
365	= conversion factor (days/year)
8.33	= conversion factor (Btu/gallon-°F)
$\Delta T_s$	= average temperature difference between the supply cold water temperature and the hot water delivery temperature (°F); determined from site-specific data.
3413	= conversion factor (Btu/kWh)
$E_{t,\text{base}}$	= baseline water heater thermal efficiency; characterization assumes a value of 98%.
COP	= Coefficient of Performance of the heat pump water heater system, including any auxiliary water heating systems. = Actual installed

#### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = (\text{GPH} * 8.33 * \Delta T_s) / (3413) * [(1/E_{t,\text{base}}) - (1/\text{COP})] * \text{CF}$$

Where:

GPH	= hourly water consumption (gallons/day); determined from site-specific data.
CF	= Summer Peak Coincidence Factor for measure = 0.06 <sup>672</sup>

#### Fossil Fuel Impact Descriptions and Calculation

n/a<sup>673</sup>

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

---

<sup>672</sup> “Technical Reference Manual (TRM) for Ohio Senate Bill 221 Energy Efficiency and Conservation Program and 09-512-GE-UNC”, October 15, 2009. Based on Ohio utility supply profiles.

<sup>673</sup> The interactive effects between space heating and cooling requirements and heat pump water heaters have been neglected for this characterization but are candidates for future study. Heat pumps remove waste heat from surrounding air sources which can reduce cooling loads and increase heating loads if the heat pump water heater is located within a conditioned space.

## Commercial Clothes Washer (Time of Sale)

**Official Measure Code** (Measure Number: **X-X-X-X** (Program name, End Use))

### Description

High-efficiency commercial washers are intended for purchase and installation in laundromats, multi-family buildings and institutions. These high-efficiency washers are nearly identical to residential models available in retail outlets, with minor engineering changes, such as the addition of a coin box. High-efficiency commercial washers typically save up to 50 percent of energy costs and use about 30 percent less water.

### Definition of Efficient Equipment

The efficient equipment is defined as a commercial-grade clothes washer meeting the minimum efficiency standards for ENERGY STAR (MEF  $\geq 1.8$ )<sup>674</sup>. Also, for this characterization to apply the facility where the equipment is installed must have an electric water heater.

### Definition of Baseline Equipment

The baseline equipment for this measure is a commercial grade clothes washer that meets federal manufacturing standards (MEF  $\geq 1.26$ ).

### Deemed Calculations for this Measure

$$\text{Annual kWh Savings} = \Delta \text{kWh}_{\text{Load}} \times 950$$

$$\text{Summer Coincident Peak kW Savings} = \text{n/a}$$

### Deemed Lifetime of Efficient Equipment

The effective measure life for commercial-grade clothes washers is 10 years<sup>675</sup>

### Deemed Measure Cost

\$347 per unit ENERGY STAR/CEE Tier1, \$475 per unit CEE Tier 2, \$604 per unit CEE Tier 3<sup>676</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = \Delta \text{kWh}_{\text{Load}} \times \text{Loads}_{\text{Year}}$$

Where:

$\Delta \text{kWh}_{\text{Load}}$  = The difference in electricity consumption per load of laundry between baseline equipment and efficient equipment  
= Dependent on energy source for washer<sup>677</sup>:

---

<sup>674</sup> Beginning in 2011 the criteria will be raised to MEF > 2.0

<sup>675</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Effective/Remaining Useful Life Values",

<sup>676</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, "Cost Values and Summary Documentation",

Fuel Source	ΔkWh per Load	Therms per Load
Electric Hot Water, Electric Dryer	0.57	0
Gas Hot Water, Electric Dryer	0.25	0.02

$$\text{Load}_{\text{Year}} = \text{Number of loads per year} \\ = 950^{678}$$

For example, a commercial clothes washer is installed in a facility with electric water heating and electric drying:

$$\Delta\text{kWh} = 0.57 \times 950 \\ = 541.5 \text{ kWh}$$

#### Summer Coincident Peak Demand Savings

No demand savings are claimed for this measure since there is insufficient peak coincident data.

#### Fossil Fuel Impact Descriptions and Calculation

Commercial clothes washers will only have fossil fuel impacts when either the washer, dryer, or both are powered by gas instead of electricity.

$$\Delta\text{MMBtu} = \Delta\text{MMBtu}_{\text{Load}} \times \text{Loads}_{\text{Year}}$$

Where:

$$\begin{aligned} \Delta\text{MMBtu}_{\text{Load}} &= \text{The difference in gas consumption per load of laundry between baseline equipment and efficient equipment} \\ &= \text{Dependent on energy source for washer and dryer – see Table ‘Assumptions for Electricity and Gas Consumption for Commercial Clothes Washers’ in the Reference Table Section} \\ \text{Loads}_{\text{Year}} &= \text{Number of loads per year} \\ &= 950 \end{aligned}$$

#### Water Impact Descriptions and Calculation

The annual water savings for a commercial clothes washer is assumed to be 15,854 gallons per year.<sup>679</sup>

#### Deemed O&M Cost Adjustment Calculation

n/a

#### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>677</sup> ENERGY STAR calculator for Commercial Clothes Washers, values based on the difference between the average of all qualified models and the average of all unqualified models (July 2009).

<sup>678</sup> ENERGY STAR calculator for Commercial Clothes Washers, Multi-Family Laundry Association (2002)

<sup>679</sup> ENERGY STAR calculator for Commercial Clothes Washers, average water consumption based on all qualified models (July 2009)

## Commercial Plug Load – Smart Strip Plug Outlets (Time of Use, Retrofit – New Equipment)

**Official Measure Code** (Measure Number: **X-X-X-X** (Program name, End Use))

### Description

A smart strip plug outlet is a multi-plug power strip with the ability to automatically disconnect specific loads that are plugged into it depending upon the power draw of a control load, also plugged into the strip. The energy savings are measured by estimating the number of hours that electronic devices at typical workstations are either in the “sleep” mode or shut off and the standby loads consumed by the devices at those times. The smart strip will eliminate these standby loads and result in measureable energy savings. A smart strip plug outlet is purchased through a retail outlet and installed in an office environment where standby loads are uncontrolled.

### Definition of Efficient Equipment

The efficient condition assumes peripherals electronic office equipment is plugged into the controlled Smart Strip outlets resulting in a reduction in standby load. No savings are associated with the control load, or loads plugged into the uncontrolled outlets.

### Definition of Baseline Equipment

The baseline assumes a mix of typical office equipment (computer and peripherals) each with uncontrolled standby load.

### Deemed Savings for this Measure

Annual kWh Savings = 23.6 kWh

Summer Coincident Peak kW Savings = 0

### Deemed Lifetime of Efficient Equipment

The estimated useful life for a smart strip plug outlet is 8 years<sup>680</sup>

### Deemed Measure Cost

The estimated incremental cost for smart strip plug outlets is assumed to be \$15.<sup>681</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0<sup>682</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{WORKDAYS} \times \Delta \text{Wh}_{\text{Workday}} + (365 - \text{WORKDAYS}) * \Delta \text{Wh}_{\text{Non-Workday}}) / 1000$$

---

<sup>680</sup> BC Hydro report: Smart Strip electrical savings and usability, October 2008 (unit can only take one surge, then needs to be replaced)

<sup>681</sup> Research Into Action, Inc. (2010) *Electronics and Energy Efficiency: A Plug Load Characterization Study*. Prepared for Southern California Edison.. Incremental cost over standard power strip with surge protection with average market price of \$35 for controlled power strip and \$20 for baseline plug strip with surge protection

<sup>682</sup> Based on the assumption that most office equipment will be operating during the peak coincident hour



Where:

WORKDAYS = Average number of workdays, or business days, in a year  
= 240<sup>683</sup>

$\Delta Wh_{\text{workday}}$  = The energy savings of devices plugged into the strip on work days (Wh)  
= 63.23<sup>684</sup>

$\Delta Wh_{\text{Non-workday}}$  = The energy savings of devices plugged into the strip on non-work days (Wh)  
= 67.63

### Summer Coincident Peak Demand Savings

$$\Delta kW = 0$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

Standby Power Consumption for Devices Using Smart Strip Plug Outlets<sup>685</sup>

Plug Load	Watts in Standby	Hours in Standby	Watts when off	Hours Off, Workday	Hours Off, Non-Workday	% of strips <sup>686</sup>
LCD Monitor	1.38	4	1.13	12	24	69%
CRT Monitor	12.14	4	0.8	12	24	25%
Printer (avg. laser and ink)	NA	0	1.42	20	24	43%
Multifunction Printer (avg. laser and ink)	NA	0	4.19	20	24	12%
Speakers	1.79	4	1.79	12	24	1%
Scanner	NA	0	2.48	20	24	7%
Copier	NA	0	1.49	20	24	5%
Modem	3.85	16	3.84	0	24	8%
Charger	2.24	0	0.26	20	24	50%

$\Delta Wh_{\text{Workday}}$	63.23064
$\Delta Wh_{\text{Non-Workday}}$	67.6344

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>683</sup> Assumes 2 weeks of vacation and 2 weeks of holidays for a total of 48 work weeks annually

<sup>684</sup> See Table 'Standby Power Consumption of Devices Using Smart Strip Plug Outlets'

<sup>685</sup> Standby and off loads sourced from Lawrence Berkeley National Laboratory <http://standby.lbl.gov/summary-table.html>.

Hours of operation based on engineering estimates.

<sup>686</sup> Research Into Action, Inc. (2010) *Electronics and Energy Efficiency: A Plug Load Characterization Study*. Prepared for Southern California Edison.. Page k-2.

## Plug Load Occupancy Sensor (Retrofit)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Plug load occupancy sensors are devices that control low wattage office equipment using an occupancy sensor. They typically use an infrared sensor to monitor movement, and use a smart strip to turn off connected devices, or put them in standby mode, when no one is present.

### Definition of Efficient Equipment

In order for this characterization to apply, the installed equipment must be a 'smart' power strip with both control and peripheral outlets, and an occupancy sensor.

### Definition of Baseline Equipment

The baseline assumes a mix of typical document station office equipment (printers, scanners, fax machines, etc.) each with uncontrolled standby load.

### Deemed Savings for this Measure

Annual kWh Savings = 169 kWh/yr

Summer Coincident Peak kW Savings = 0

### Deemed Lifetime of Efficient Equipment

The estimated useful life for a smart strip plug outlet is 8 years<sup>687</sup>

### Deemed Measure Cost

The incremental cost for this measure is assumed to be \$70<sup>688</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

0<sup>689</sup>

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

$$\Delta \text{kWh} = (\text{WORKDAYS} \times \Delta W_{\text{sleep}}) / 1000$$

Where:

WORKDAYS = Average number of workdays, or business days, in a year  
= 240<sup>690</sup>

$\Delta W_{\text{sleep}}$  = The energy savings of devices plugged into the strip when in 'sleep' mode (Wh)  
= 704<sup>691</sup>

---

<sup>687</sup> BC Hydro report: Smart Strip electrical savings and usability, October 2008 (unit can only take one surge, then needs to be replaced)

<sup>688</sup> *Plug Load Characterization Study for Southern California Edison*. Prepared by Research Into Action (2010)

<sup>689</sup> Based on assumption that office equipment will be running during the peak period

<sup>690</sup> Assumes 2 weeks of vacation and 2 weeks of holidays for a total of 48 work weeks annually

<sup>691</sup> See Table 'Standby Power Consumption of Devices Using Smart Strip Plug Outlets'

### Summer Coincident Peak Demand Savings

$$\Delta kW = 0$$

### Fossil Fuel Impact Descriptions and Calculation

n/a

### Water Impact Descriptions and Calculation

n/a

### Deemed O&M Cost Adjustment Calculation

n/a

### Reference Tables

Standby Power Consumption for Devices Using Smart Strip Plug Outlets<sup>692</sup> (All values in Watts)

Computer Peripherals	Connected Load when 'On'	Connected Load in 'Sleep'	Hours in Sleep Mode	Daily Savings
Laser Printer	131	2	4	516
Multi-function device, laser (scanner, fax)	50	3	4	188
Total				704

### Version Date & Revision History

Draft: Portfolio #  
Effective date: Date TRM will become effective  
End date: Date TRM will cease to be effective (or TBD)

<sup>692</sup> Standby loads sourced from Lawrence Berkeley National Laboratory <http://standby.lbl.gov/summary-table.html>. Hours of operation based on engineering estimations.

## Energy Efficient Furnace (Time of Sale, Retrofit – Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Efficient Products, HVAC End Use))

### Description

This measure covers the installation of a high efficiency gas furnace in lieu of a standard efficiency gas furnace. High efficiency gas furnaces achieve savings through the utilization of a sealed, super insulated combustion chamber, more efficient burners, and multiple heat exchangers that remove a significant portion of the waste heat from the flue gasses. Because multiple heat exchangers are used to remove waste heat from the escaping flue gasses, most of the flue gasses condense and must be drained. Furnaces equipped with ECM fan motors can save additional electric energy.

### Definition of Efficient Equipment

The efficient equipment is a natural gas-fired furnace with a minimum Annual Fuel Utilization Efficiency (AFUE) rating of 93%.

### Definition of Baseline Equipment

The equivalent baseline equipment is a natural gas-fired furnace with an AFUE of 80%.

### Deemed Calculation for this Measure

Annual kWh Savings	$= 5 \times \text{CAP} \times \text{EFLH}_h \times (\eta_{\text{base}}/\eta_{\text{ee}})$
Summer Coincident Peak kW Savings	$= 0^{693}$
Annual MMBtu Savings	$= (\text{CAP}) * (\text{EFLH}_h) * ((1 - (\eta_{\text{base}}/\eta_{\text{ee}})) - \text{MMBtu}_{\text{ECM}})$

### Deemed Lifetime of Efficient Equipment

20<sup>694</sup>

### Deemed Measure Cost

Incremental cost estimated at \$900<sup>695</sup>

### Deemed O&M Cost Adjustments

\$0<sup>696</sup>

### Coincidence Factor

n/a

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

---

<sup>693</sup> For analysis purposes, it is assumed that the furnace fan does not operate during the summer season and therefore contributes no summer peak coincident savings.

<sup>694</sup> Based on engineering modeling by Michael Blasnik (M. Blasnik & Associates) and KEMA in support of “Application of Columbia Gas of Ohio, Inc. to Establish Demand Side Management Programs for Residential and Commercial Consumers,” Filed with the Ohio Public Utilities Commission, Case No. 08-0833-GA-UNC, July 1, 2008

<sup>695</sup> Ibid.

<sup>696</sup> Ibid.

**If furnace equipped with ECM fan motors**, the following algorithm can be used to calculate energy savings; **otherwise, electric energy savings are zero**:

$$\Delta \text{kWh} = (5) \times (\text{CAP}) \times (\text{EFLH}_h) \times (\eta_{\text{base}}/\eta_{\text{ee}})$$

Where:

5	= annual kWh savings per MMBtu of heating fuel consumption <sup>697</sup>
CAP	= equipment heating capacity (MMBtu/hr)
EFLH <sub>h</sub>	= equivalent full load heating hours = 2,408 <sup>698</sup>
η <sub>ee</sub>	= installed equipment efficiency; expressed as AFUE, Combustion Efficiency (E <sub>c</sub> ), or Thermal Efficiency (E <sub>t</sub> ).
η <sub>base</sub>	= Assume 80% <sup>699</sup> .

### Summer Coincident Peak Demand Savings

$$\Delta \text{kW} = 0$$

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = (\text{CAP}) * (\text{EFLH}_h) * ((1 - (\eta_{\text{base}}/\eta_{\text{ee}})) - \text{MMBtu}_{\text{ECM}})$$

Where:

MMBtu <sub>ECM</sub>	= increased heating fuel consumption in MMBtu due to decreased fan motor waste heat (for furnaces with ECM fan ONLY) = (0.019) * (CAP) * (EFLH <sub>h</sub> ) * (η <sub>base</sub> /η <sub>ee</sub> ) <sup>700</sup>
----------------------	---

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>697</sup> Adapted from “Electricity Use by New Furnaces: A Wisconsin Field Study,” Energy Center of Wisconsin, 10/2003. Assumes ECM fan motor savings scale linearly with annual fuel consumption.

<sup>698</sup> From Guelph, Ontario – GuelphHydro Inc. Project LCC Analysis. Based on Climate data, average mean annual temperature and geographic location, Guelph is very similar to Akron, Ohio. While was judged internally to be an acceptable proxy value for Ohio, this factor is a candidate for future review and verification.

<sup>699</sup> International Energy Conservation Code (IECC 2006) 2006, Table 503.2.3(4), Warm Air Furnaces and Combination Warm Air Furnaces/Air-Conditioning Units, Warm Air Duct Furnaces and Unit Heaters, Minimum Efficiency Requirements. Dependent on equipment type and capacity, minimum efficiency levels range from 78% to 81% and are either expressed as AFUE, E<sub>c</sub>, or E<sub>t</sub>. For analysis purposes, assume 80%.

<sup>700</sup> Adapted from “Electricity Use by New Furnaces: A Wisconsin Field Study,” Energy Center of Wisconsin, 10/2003.

## High Efficiency Storage Tank Water Heater (Time of Sale, Retrofit – Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

Stand-alone, or tank-type heaters, run off natural gas. These water heaters consist of a storage tank with an attached heat source, in this case, a high-efficiency gas burner. They achieve energy savings through the use of efficient heating equipment and superior tank insulation.

### Definition of Efficient Equipment

The efficient case is a natural gas-fired tank-type water heater exceeding the efficiency requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 504.2.

### Definition of Baseline Equipment

The baseline condition is a gas-fired tank-type water heater meeting the efficiency requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 504.2.

### Deemed Savings for this Measure

Annual kWh Savings	= 0
Summer Coincident Peak kW Savings	= 0
Annual MMBtu Savings	$= [W \times 8.33 \times (T_{out} - T_{in}) \times ((1/\eta_{base}) - (1/\eta_{ee})) + (STBY_{base} - STBY_{ee}) \times 8760] / 1,000,000$

### Deemed Lifetime of Efficient Equipment

12 years<sup>701</sup>

### Deemed Measure Cost

\$300<sup>702</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

There are no expected energy savings associated with this measure

#### Summer Coincident Peak Demand Savings

There is no expected peak demand reduction associated with this measure.

---

<sup>701</sup> Ibid.

<sup>702</sup> Ibid.

## Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = [W \times 8.33 \times (T_{\text{out}} - T_{\text{in}}) \times ((1/\eta_{\text{base}}) - (1/\eta_{\text{ee}})) + (\text{STBY}_{\text{base}} - \text{STBY}_{\text{ee}}) \times 8760] / 1,000,000$$

Where:

W	= Annual water use for equipment (in gallons) = If actual water usage is unknown, assume 21,900 <sup>703</sup> .
8.33	= weight in lbs of 1 gallon of water, or the Btus required to raise 1 gallon of water 1 °F
T <sub>out</sub>	= water heater set point (°F) = If unknown, assume 130 °F <sup>704</sup>
T <sub>in</sub>	= water inlet temperature (°F) = If unknown, assume 50 °F <sup>705</sup>
η <sub>base</sub>	= rated efficiency of baseline water heater expressed as Energy Factor (EF) or Thermal Efficiency (E <sub>t</sub> ); see table below for values:

Equipment Type	Size Category (Input)	Subcategory	Performance Required <sup>706</sup> (η <sub>base</sub> and STBY <sub>base</sub> )
Storage water heaters, Gas	<= 75,000 Btu/h	>= 20 gal	EF = 0.67 - 0.0019V
	> 75,000 Btu/h and <= 155,000 Btu/h	< 4,000 Btu/h/gal	E <sub>t</sub> = 80%, STBY <sub>base</sub> = (Q / 800 + 110√V)
	> 155,000 Btu/h	< 4,000 Btu/h/gal	E <sub>t</sub> = 80%, STBY <sub>base</sub> = (Q / 800 + 110√V)

V	= rated tank volume in gallons = Actual installed
Q	= nameplate input rate in Btu/hr = Actual installed
η <sub>ee</sub>	= rated efficiency of efficient water heater expressed as Energy Factor (EF) or Thermal Efficiency (E <sub>t</sub> ) = Actual installed
STBY <sub>base</sub>	= standby losses/hr of baseline water heater (Btu/hr); see table above for values.
STBY <sub>ee</sub>	= standby losses/hr of efficient water heater (Btu/hr) = Actual installed (for unit rated with Energy Factor (EF), STBY <sub>base</sub> = 0)
8760	= hours per year
1,000,000	= conversion factor (Btu/MMBtu)

## Water Impact Descriptions and Calculation

n/a

## Deemed O&M Cost Adjustment Calculation

n/a

## Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

<sup>703</sup> 60 gallons a day for 365 days per year

<sup>704</sup> NAHB Research Center, (2002). *Performance Comparison of Residential Hot Water Systems*. Prepared for: National Renewable Energy Laboratory, Golden, Colorado.

<sup>705</sup> NAHB Research Center, (2002). *Performance Comparison of Residential Hot Water Systems*. Prepared for: National Renewable Energy Laboratory, Golden, Colorado.

<sup>706</sup> International Energy Conservation Code (IECC 2006) 2006, Table 504.2, Minimum Performance of Water-Heating Equipment.

## Tankless Water Heaters (Time of Sale, Retrofit – Early Replacement)

**Official Measure Code** (Measure Number: X-X-X-X (Program name, End Use))

### Description

This measure covers the installation of a natural gas-fired tankless or instantaneous water heater. Tankless water heaters essentially function like normal water heaters without the storage tank. When there is demand for hot water, the gas burner fires and heats water as it passes through the heater to the demand source. Because the water heater must heat water at the rate of flow through the device, tankless water heaters are not well suited to serve sources of significant demand. Tankless water heaters achieve savings by eliminating the standby losses that occur in stand-alone or tank-type water heaters.

### Definition of Efficient Equipment

The efficient case is a tankless natural gas-fired water heater exceeding the efficiency requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 504.2.

### Definition of Baseline Equipment

The baseline condition is a gas-fired tank-type water heater meeting the efficiency requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 504.2.

### Deemed Calculation for this Measure

Annual kWh Savings	= 0
Summer Coincident Peak kW Savings	= 0
Annual MMBtu Savings	$= W \times 8.33 \times (T_{\text{out}} - T_{\text{in}}) \times [(1 / \eta_{\text{base}}) - (1 / \eta_{\text{ee}})] \times (\text{STBY}_{\text{base}} \times 8760) / 1,000,000$

### Deemed Lifetime of Efficient Equipment

20 years<sup>707</sup>

### Deemed Measure Cost<sup>708</sup>

Full Installed Cost: \$871.74

Incremental Material Cost: \$433.72

### Deemed O&M Cost Adjustments

\$9.60<sup>709</sup>

### Coincidence Factor

n/a

---

<sup>707</sup> CenterPoint Energy – Triennial CIP/DSM Plan 2010-2012 Report

<sup>708</sup> 2008 Database for Energy-Efficiency Resources (DEER), Version 2008.2.05, “Cost Values and Summary Documentation”, California Public Utilities Commission, December 16, 2008

<sup>709</sup> CenterPoint Energy – Triennial CIP/DSM Plan 2010-2012 Report



## REFERENCE SECTION

### Calculation of Savings

#### Energy Savings

There are no expected energy savings associated with this measure

#### Summer Coincident Peak Demand Savings

There is no expected peak demand reduction associated with this measure.

#### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = W \times 8.33 \times (T_{\text{out}} - T_{\text{in}}) \times [(1 / \eta_{\text{base}}) - (1 / \eta_{\text{ee}})] \times (\text{STBY}_{\text{base}} \times 8760) / 1,000,000$$

Where:

W	= Annual water use for equipment (in gallons) = If actual water usage is unknown, assume 21,900 <sup>710</sup> .
8.33	= weight in lbs of 1 gallon of water, or the Btus required to raise 1 gallon of water 1 °F
T <sub>out</sub>	= water heater set point (°F) (demand temperature) = If unknown, assume 130 °F <sup>711</sup>
T <sub>in</sub>	= water inlet temperature (°F) = If unknown, assume 50°F <sup>712</sup>
η <sub>base</sub>	= rated efficiency of baseline water heater expressed as Energy Factor (EF) or Thermal Efficiency (E <sub>t</sub> ); see table below for values:

Equipment Type	Size Category (Input)	Subcategory	Performance Required <sup>713</sup> (η <sub>base</sub> and STBY <sub>base</sub> )
Storage water heaters, Gas	≤ 75,000 Btu/h	≥ 20 gal	EF = 0.67 - 0.0019V
	> 75,000 Btu/h and ≤ 155,000 Btu/h	< 4,000 Btu/h/gal	E <sub>t</sub> = 80%, STBY <sub>base</sub> = (Q / 800 + 110√V)
	> 155,000 Btu/h	< 4,000 Btu/h/gal	E <sub>t</sub> = 80%, STBY <sub>base</sub> = (Q / 800 + 110√V)

V	= rated tank volume in gallons = Actual installed
Q	= nameplate input rate in Btu/hr = Actual installed
η <sub>ee</sub>	= rated efficiency of efficient water heater expressed as Energy Factor (EF) or Thermal Efficiency (E <sub>t</sub> ) = Actual installed
1,000,000	= conversion factor (Btu/MMBtu)
STBY <sub>base</sub>	= standby losses/hr of baseline water heater (Btu/hr); see table above for values.

#### Water Impact Descriptions and Calculation

n/a

#### Deemed O&M Cost Adjustment Calculation

n/a

<sup>710</sup> 60 gallons a day for 365 days per year

<sup>711</sup> NAHB Research Center, (2002). *Performance Comparison of Residential Hot Water Systems*. Prepared for: National Renewable Energy Laboratory, Golden, Colorado.

<sup>712</sup> NAHB Research Center, (2002). *Performance Comparison of Residential Hot Water Systems*. Prepared for: National Renewable Energy Laboratory, Golden, Colorado.

<sup>713</sup> International Energy Conservation Code (IECC 2006) 2006, Table 504.2, Minimum Performance of Water-Heating Equipment.

**Version Date & Revision History**

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Stack Damper (Retrofit – New Equipment)

**Official Measure Code** (Measure Number: X-X-X-X (Efficient Products, HVAC End Use))

### Description

This measure covers the installation of a servo-controlled, exhaust vent stack damper on a boiler. The vent damper should be installed in the flue pipe, between the heating equipment and the chimney. A stack damper works like a flue damper on a fireplace by reducing draft, improving comfort, and minimizing heat loss. The vent damper can either be controlled by a heat sensor installed directly in the vent stack or by a mechanical switch connected to the thermostat, which is wired to work in unison with the ignition control switch on the boiler.

In combustion appliances that are directly vented to the atmosphere, there is a decrease in operating efficiency during standby, start-up and shut-down. During these times, warm room air is drawn through the stack via the draft hood or dilution air inlet at a rate proportional to the stack height, diameter and outdoor temperature. The most air is drawn through the vent immediately after the appliance shuts off and the flue is still hot.

A vent damper can prevent residual heat from being drawn up the warm vent stack by closing itself. Vent dampers can also reduce the amount of air that passes through the furnace or boiler heat exchanger by regulating start-up exhaust pressure, which can increase operating efficiency by reducing the time needed to achieve steady-state operating conditions. Lastly, by reducing air infiltration in the building, vent dampers can help to retain humidity, which can improve comfort during periods of high heating degree days.

### Definition of Efficient Equipment

The efficient equipment is a vent stack with a damper installed.

### Definition of Baseline Equipment

The baseline condition is a vent stack with no stack damper installed.

### Deemed Calculation for this Measure

Annual kWh Savings	= n/a
Summer Coincident Peak kW Savings	= n/a
Annual MMBtu Savings	= 100 MMBtu <sup>714</sup>

### Deemed Lifetime of Efficient Equipment

12 yrs<sup>715</sup>

### Deemed Measure Cost

\$150<sup>716</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

<sup>714</sup> CenterPoint Energy – Triennial CIP/DSM Plan 2010-2012 Report. Based on information published by Natural Resources Canada and the Minneapolis Energy Office, savings estimates for stack dampers range from 0 to 9.5% of total boiler gas consumption. This implies that the boiler capacity assumed to determine the deemed savings value is quite large and may overstate savings for smaller boilers. If significant participation for this measure is realized, it is suggested that the deemed savings estimate be abandoned in favor of a deemed calculated approach.

<sup>715</sup> CenterPoint Energy – Triennial CIP/DSM Plan 2010-2012 Report

<sup>716</sup> Manufacturer research suggests a range of \$80-\$200 materials cost, depending on size, safety controls and motor quality, as well as 1-2 hours average install time.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

There are no expected energy savings associated with this measure

#### Summer Coincident Peak Demand Savings

There is no expected peak demand reduction associated with this measure.

#### Baseline Adjustment

n/a

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = 100 \text{ MMBtu}$$

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Natural Gas-Fired Infrared Heater (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Efficient Products, HVAC End Use))

### Description

This measure covers the installation of a natural gas-fired infrared heater.

### Definition of Efficient Equipment

An infrared heater heats primarily through radiation and conduction, as opposed to traditional forced-air space heaters which heat through convection. Infrared heaters are able to heat more efficiently because they directly heat the objects in the space, including the floor slab, which then radiate heat into the air space. With a forced hot air system, the heated air rises to the ceiling and stratifies, gradually working its way down to the floor level. The floor slab and equipment act as heat sinks causing the ceiling level to be much warmer than the floor area, which will cause the forced air system to work much harder to heat the same space. What is more, forced-air systems can experience drastic losses of heated air to ventilation air changes. There is also a negligible amount of electricity use (burner ignition and gas valve) compared to a forced-air system which requires large fans to move air around the conditioned space.

### Definition of Baseline Equipment

The baseline equipment is a standard natural gas-fired convection space heater.

### Deemed Calculation for this Measure

Annual kWh Savings	= n/a
Summer Coincident Peak kW Savings	= n/a
Annual MMBtu Savings	= 11.4 MMBtu/year <sup>717</sup>

### Deemed Lifetime of Efficient Equipment

15 yrs<sup>718</sup>

### Deemed Measure Cost

\$920 (incremental cost)<sup>719</sup>

### Deemed O&M Cost Adjustments

n/a

### Coincidence Factor

n/a

---

<sup>717</sup> Based on engineering modeling by GSE in support of “Application of Columbia Gas of Ohio, Inc, to Establish Demand Side Management Programs for Residential and Commercial Consumers,” Filed with the Ohio Public Utilities Commission, Case No. 08-0833-GA-UNC, July 1, 2008. A review of savings assumptions used in Massachusetts indicates that this estimate is very conservative. The proposed value is only 85% of what is assumed for Massachusetts and should be considered for future study if this measure receives significant participation.

<sup>718</sup> Ibid.

<sup>719</sup> Ibid.

---

## REFERENCE SECTION

---

### Calculation of Savings

#### Energy Savings

There are no expected energy savings associated with this measure

#### Summer Coincident Peak Demand Savings

There is no expected peak demand reduction associated with this measure.

#### Baseline Adjustment

n/a

### Fossil Fuel Impact Descriptions and Calculation

$$\Delta\text{MMBtu} = 11.4 \text{ MMBtu/year}$$

### Deemed O&M Cost Adjustment Calculation

n/a

### Version Date & Revision History

Draft:	Portfolio #
Effective date:	Date TRM will become effective
End date:	Date TRM will cease to be effective (or TBD)

## Energy Efficient Boiler (Time of Sale)

**Official Measure Code** (Measure Number: X-X-X-X (Efficient Products, HVAC End Use))

### Description

This measure covers the replacement of an irreparable existing boiler with a high efficiency, gas-fired steam or hot water boiler. High efficiency boilers achieve gas savings through the utilization of a sealed combustion chamber and multiple heat exchangers that remove a significant portion of the waste heat from flue gasses. Because multiple heat exchangers are used to remove waste heat from the escaping flue gasses, some of the flue gasses condense and must be drained.

### Definition of Efficient Equipment

The efficient equipment is a natural gas-fired hot water or steam boiler exceeding the efficiency requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 503.2.3(5).

### Definition of Baseline Equipment

The baseline equipment is a natural gas-fired boiler meeting the efficiency requirements as mandated by the International Energy Conservation Code (IECC) 2006, Table 503.2.3(5).

### Deemed Calculation for this Measure

Annual kWh Savings	= 0
Summer Coincident Peak kW Savings	= 0
Annual MMBtu Savings	= (CAP) x (EFLH <sub>h</sub> ) x (1 - ( $\eta_{\text{base}}/\eta_{\text{ee}}$ ))

### Deemed Lifetime of Efficient Equipment

20 years<sup>720</sup>

### Deemed Measure Cost

Incremental cost is estimated at \$5,000<sup>721</sup>

### Deemed O&M Cost Adjustments

\$0<sup>722</sup>

### Coincidence Factor

n/a

---

---

## REFERENCE SECTION

---

---

### Calculation of Savings

#### Energy Savings

There are no expected energy savings associated with this measure

#### Summer Coincident Peak Demand Savings

There is no expected peak demand reduction associated with this measure.

---

<sup>720</sup> Based on engineering modeling by Michael Blasnik (M. Blasnik & Associates) in support of "Application of Columbia Gas of Ohio, Inc. to Establish Demand Side Management Programs for Residential and Commercial Consumers," Filed with the Ohio Public Utilities Commission, Case No. 08-0833-GA-UNC, July 1, 2008

<sup>721</sup> Ibid.

<sup>722</sup> Ibid.

## Fossil Fuel Impact Descriptions and Calculation

$$\Delta \text{MMBtu} = (\text{CAP}) \times (\text{EFLH}_h) \times (1 - (\eta_{\text{base}}/\eta_{\text{ee}}))$$

Where:

CAP = equipment heating capacity (MMBtu/hr)  
 = Actual installed  
 EFLH<sub>h</sub> = equivalent full load heating hours; determined with site-specific data. If actual value is unknown, assume 2,408<sup>723</sup>.  
 η<sub>ee</sub> = installed equipment efficiency; expressed as AFUE, Combustion Efficiency (E<sub>c</sub>), or Thermal Efficiency (E<sub>t</sub>).  
 = Actual installed  
 η<sub>base</sub> = baseline equipment efficiency; expressed as AFUE, E<sub>c</sub>, or E<sub>t</sub>; see table below for values:

Equipment Type	Size Category (Input)	Subcategory Or Rating Condition	Minimum Efficiency <sup>724</sup>
Boilers, Gas fired	< 300,000 Btu/h	Hot water	80% AFUE
		Steam	75% AFUE
	≥ 300,000 Btu/h and ≤ 2,500,000 Btu/h	Minimum capacity	75% E <sub>t</sub>
		Hot water	80% E <sub>c</sub>
	> 2,500,000 Btu/h	Hot water	80% E <sub>c</sub>
		Steam	80% E <sub>c</sub>

## Deemed O&M Cost Adjustment Calculation

n/a

## Version Date & Revision History

Draft: Portfolio #  
 Effective date: Date TRM will become effective  
 End date: Date TRM will cease to be effective (or TBD)

<sup>723</sup> From Guelph, Ontario – GuelphHydro Inc. Project LCC Analysis. Based on Climate data, average mean annual temperature and geographic location, Guelph is very similar to Akron, Ohio. This was judged internally to be an acceptable proxy value for Ohio, although this surely warrants future review and verification.

<sup>724</sup> International Energy Conservation Code (IECC 2006) 2006, Table 503.2.3(5), Boilers, Gas- and Oil-Fired, Minimum Efficiency Requirements



## IV. Protocols for Custom Commercial & Industrial Projects

### C&I Equipment Replacement – Custom Measure Analysis Protocol

This protocol defines the requirements for analyzing and documenting commercial and industrial energy efficiency measures. It applies to custom measures filed under Utility Programs and those prepared for Mercantile Customers. This protocol addresses equipment replacement measures that are not covered by other analysis methodologies in the TRM. An equipment replacement project is defined as equipment replaced at the end of its rated service life, or when it is replaced due to failure, obsolescence or a need for increased capacity. If the project is replacing equipment prior to the end of its rated service life for the purpose of achieving energy savings, it is classified as Retrofit and the “C&I Retrofit – Custom Measure Analysis Protocol” should be used to guide analysis.

This protocol is intended to address the energy impacts of the incremental energy efficiency improvements over what would have been installed as per applicable federal/state/local codes or standard industry practice. Projects that include duplex, redundant and/or spare equipment shall calculate the energy savings based only on the operating equipment and systems.

This analysis protocol is supplemented by a glossary and an Analysis Template (Appendix B). Words used herein that are defined in the glossary are in italics. The Analysis Template is a tool that can guide applicants in preparing and presenting the documentation to support custom equipment replacement energy efficiency measure savings estimates.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Project Savings

Section 3: Project Variables

Section 4: Documentation and Metering

#### Section 1: Project Information

##### **Project Title**

Provide a unique title for the project so that it is easily distinguishable from other projects prepared by the same customer and from projects with similar scope. Example: Company XYZ Building A - Compressed Air System Replacement.

##### **Customer Name**

Provide the name of the company undertaking the energy efficiency improvements.

##### **Customer Contact**

Provide the contact information including name, title, mailing address, phone, and email for the primary customer contact on this project.

##### **Site (Location)**

Provide the full address of the site at which the project is being implemented. If the customer has an additional business location that is involved with the project, include additional customer site information as needed.

##### **Sector/Industry Description and NAICS Code**

Describe the sector and industry in which the custom measure is being applied. Sectors include: Industrial, Commercial, Institutional, and Multi-family. Industry should specify the end use for commercial and institutional projects (e.g. office, restaurant, dormitory) and the specific industry for manufacturing projects<sup>725</sup>.

---

<sup>725</sup> 2007 NAICS; North American Industry Classification System; <http://www.census.gov/cgi-bin/sssd/naics/naicsrch?chart=2007>

**Utility(ies) Information**

The name of the affected utility(ies) serving the customer. Provide all relevant account and meter information for electric and gas accounts and meters affected by the project.

**Program**

Identify the program under which this project will be submitted and why the project falls under the program. Projects submitted under existing utility programs should identify the program under which the project application will be filed and the utility-specific identifier for the project. Projects being submitted under the Mercantile Program should so indicate.

**Project/Technology Description**

Describe the energy using equipment and systems affected by the project in lay terms. Include specific information regarding industrial process technologies. For example: "Expand existing lab fume hoods by replacing two 10ft constant speed 10,000 CFM hoods with two 15ft modulating hoods controlled by smoke and temperature sensors."

**Project Implementation Schedule**

Define the implementation schedule for the project, including start and completion dates.

**Measures Included in the Project**

All energy efficiency measures included in the project shall be clearly identified and savings calculations and estimates shall be clearly documented for each measure in accordance with this protocol.

**Affected Energy Sources (Electric, Gas, Other)**

Identify all affected *energy sources* (electric, gas, propane, oil, solar, etc.) for the project, provide a brief description of how the source energy use is affected and quantify the impacts in the analysis.

**Analysis Firm(s) and Contact(s)**

Provide information regarding the firm performing the engineering analysis of the custom project. Provide the name(s) of the contacts for the firm(s) and contact information including company name, individual(s) name, address, phone, and email.

**Section 2: Energy Consumption and Demand**

This section defines the requirements for calculating baseline and efficient case energy consumption and demand as well as the method for calculating savings. Calculations shall address all project variables in accordance with the requirements of Section 3 and undertake the analysis in accordance with the documentation and metering requirements in Section 4.

The equations used in this protocol assume that the project has a single measure. If the project has multiple measures, these calculations shall be repeated for each measure in such a way as to capture interactive effects.

**Efficient Case****Efficient Technology Description and Documentation**

Describe the new technology, measure, and/or change in operations, and how it saves energy. Document any relevant efficiency codes or federal/state/local standards that apply to the proposed efficient equipment and the ratings of the measure equipment in comparison with applicable standards. If the efficient measure was the result of a process improvement that provides additional benefits, such as waste reduction, clearly describe all of the ways that the new process saves energy and resources. This can include reductions in areas such as waste heat, O&M costs, labor costs, water consumption, or process waste.

**Efficient Case Annual Energy Use**

Calculate the annual energy use for the proposed equipment using the methodologies outlined in this protocol and all referenced and applicable standards.

The total efficient energy use shall be calculated separately for each *energy source* (e.g. electric and gas) according to the following equations.

For loads calculated from a regression analysis (e.g. kW vs. Temperature as described in Section 4) the following equation shall be used:

$$ENERGY_{eff} = \sum_{j=1}^m (E\text{ LOAD}_{j,eff} \times HOURS_{j,eff})$$

Where

<b>ENERGY<sub>eff</sub></b> ≡	Annual Efficient Energy Use - annual energy use with the efficiency improvement installed, calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>E LOAD<sub>j,eff</sub></b> ≡	Efficient Load (electric kW, gas therms) - efficient load for each system and subsystem with operating condition <i>j</i> (as defined below). For example, efficient load will need to be calculated differently for staged condenser fans that have different operating hours or multiple pumps that operate at varying speeds.
<b>HOURS<sub>j,eff</sub></b> ≡	Total Annual Operating – total annual operating hours for each system and subsystem with operating condition <i>j</i> (as defined below).

For loads calculated based on metering of full load or on equipment specifications:

$$ENERGY_{eff} = \sum_{j=1}^m (FULL\text{ LOAD}_{j,eff} \times LF_{j,eff} \times HOURS_{j,eff})$$

where

<b>ENERGY<sub>eff</sub></b> ≡	Annual Efficient Energy Use - annual energy use with the efficiency improvement installed, calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>FULL LOAD<sub>j,eff</sub></b> ≡	Efficient Full Load - the maximum operating load of each efficient system and subsystem with operating condition <i>j</i> (as defined below).
<b>LF<sub>j,eff</sub></b> ≡	Load Factor - fraction of Full Load for each efficient system and subsystem with operating condition <i>j</i> (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.  If needed, LF could be calculated from a regression curve kW and FULL LOAD for distinct operating conditions. This may arise when comparing efficient data with non-metered baseline LF ranges which are not based on a regression curve.
<b>HOURS<sub>j,eff</sub></b> ≡	Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition <i>j</i> (as defined below).
<b>j</b> ≡	System Condition - refers to each distinct combination of system mode, number of hours, full load demand, and load factor for each system or subsystem. Refer to example below.
<b>m</b> ≡	Number of Terms – total Number of Terms needed to cover all conditions of affected systems and subsystems.

### Efficient Case Coincident Electric Demand (kW)

Document the efficient case coincident electric demand for each measure according to one of the following equations:

For variable loads:

$$C\text{ LOAD}_{eff} = AVG\ PH\ LOAD_{eff}$$

Where

**AVG PH LOAD<sub>eff</sub>** ≡ Average Efficient Load of all affected equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours* and is equal to total energy use during the *Performance Hours* divided by the total *Performance Hours*.

For constant loads or loads without metered data:

$$C\text{ LOAD}_{eff} = \sum_{k=1}^n (FULL\ LOAD_{k,eff} \times LF_{k,eff} \times CF_{k,eff})$$

where

**C LOAD<sub>eff</sub>** ≡ Average Coincident Efficient Load – Average Coincident Load of all affected efficient equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours*.

**FULL LOAD<sub>k,eff</sub>** ≡ Efficient Full Load - the maximum operating load of each efficient system and subsystem during the *Performance Hours* with operating condition *k* (as defined below), exclusive of non operating time.

**LF<sub>k,eff</sub>** ≡ Load Factor - fraction of Full Load for each efficient system and subsystem with operating condition *k* (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.

**CF<sub>k,eff</sub>** ≡ *Coincidence Factor* - the Coincidence Factor is the fraction of time that each efficient system and subsystem is operating during the *Performance Hours* for operating condition *k* (as defined below). The three typical conditions for CF are as follows: CF is unity if the equipment is continuously on during the *Performance Hours*; CF is zero for each system or subsystem that is not operating during the *Performance Hours*; otherwise, CF is the ratio of the 'on' time to the total number of performance hours.

**k** ≡ System Condition - refers to each distinct combination of the system mode, Full Load demand, and Load Factor for each system or subsystem operating during the *Performance Hours*. Refer to example below.

**n** ≡ Number of Terms – total Number of Terms needed to cover all operating modes of affected systems and subsystems during *Performance Hours*.

The analysis shall include documentation of how the load varies during the *Performance Hours*. For constant load equipment, the analysis shall be based on the equipment load and operating schedule during the performance hours. For variable load equipment, the analysis shall address variations in equipment load and operating schedule during the performance hours.

Additional analysis will typically be prepared to address the impact of the energy efficiency measure on customer peak demand. Such analysis is critical to calculating customer cost savings but should not be confused with the required calculation of the coincident demand during the performance hours.

## Baseline Case

### Baseline Technology Methodology and Description

Baseline for Equipment Replacement projects is the equipment meeting the level of efficiency required by State Code<sup>726</sup>, applicable Federal product efficiency standard<sup>727</sup> or standard practices, whichever is most stringent, in place at the time of installation. If there is no applicable State code or Federal Standard then the methodology for establishing standard practice shall be documented in the M&V plan as described in PJM Manual 18B<sup>728</sup> Section 8. The baseline description shall detail information regarding the baseline technology(ies) including make, model number, nameplate data and rated capacity of the equipment, operating schedule, and controls and how the baseline was determined.

### Baseline Case Annual Energy Use

Calculate the annual energy use for the baseline equipment and systems using the methodologies outlined in this protocol and all referenced and applicable standards.

The total baseline energy use shall be calculated separately for each *energy source* (e.g. electric and gas) according to the following equations.

For loads calculated from a regression analysis (e.g. kW vs. Temperature as described in Section 4) the following equation shall be used:

$$ENERGY_{base} = \sum_{j=1}^n (E\,LOAD_{j,base} \times HOURS_{j,base})$$

Where

**$ENERGY_{base}$**  ≡ Annual Baseline Energy Use - Annual Energy Use for baseline equipment calculated separately for each measure and each energy source (electric, gas).

**$E\,LOAD_{j,base}$**  ≡ Baseline Load (electric kW, gas therms) - Baseline Load for each system and subsystem with operating condition *j* (as defined below). For example, Baseline Load will need to be calculated differently for staged condenser fans that have different operating hours or multiple pumps that operate at varying speeds.

**$HOURS_{j,base}$**  ≡ Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition *j* (as defined below).

For loads calculated based on equipment specifications and metering of baseline operating conditions including load factor and operating hours:

<sup>726</sup> International Code Council, 2007 Ohio Building Code;  
<http://publiccodes.citation.com/st/oh/st/b2v07/index.htm?bu2=undefined>

<sup>727</sup> ANSI/ASHRAE/IESNA Standard 90.1-2004, ISSN 1041-2336; [www.ashrae.org](http://www.ashrae.org)

<sup>728</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

$$ENERGY_{base} = \sum_{j=1}^m (FULL\ LOAD_{j,base} \times LF_{j,base} \times HOURS_{j,base})$$

where

<b>ENERGY<sub>base</sub></b> ≡	Annual Baseline Energy Use - Annual Energy Use for baseline equipment calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>FULL LOAD<sub>j,base</sub></b> ≡	Baseline Full Load - the maximum operating load of each baseline system and subsystem with operating condition <i>j</i> (as defined below).
<b>LF<sub>j,base</sub></b> ≡	Load Factor - fraction of Full Load for each baseline system and subsystem with operating condition <i>j</i> (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.
<b>HOURS<sub>j,base</sub></b> ≡	Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition <i>j</i> (as defined below).
<b>j</b> ≡	System Condition - refers to each distinct combination of system mode, number of hours, Full Load demand, and Load Factor for each system or subsystem. Refer to example below.
<b>m</b> ≡	Number of Terms – total Number of Terms needed to cover all conditions of affected systems and subsystems.

#### Baseline Case Full Load Demand

Document the baseline case coincident electric demand for each measure according to one of the following equations:

For variable loads:

$$C\ LOAD_{base} = AVG\ PH\ LOAD_{base}$$

Where

<b>AVG PH LOAD<sub>base</sub></b> ≡	Average Baseline Load of all affected equipment during the <i>Performance Hours</i> of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the <i>Performance Hours</i> and is equal to total energy use during the <i>Performance Hours</i> divided by the total <i>Performance Hours</i> .
-------------------------------------	---

For constant loads:

$$C\ LOAD_{base} = \sum_{k=1}^n (FULL\ LOAD_{k,base} \times LF_{k,base} \times CF_{k,base})$$

where

<b>C LOAD<sub>base</sub></b> ≡	Average Coincident Baseline Load – average coincident load of all affected baseline equipment during the <i>Performance Hours</i> of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the <i>Performance Hours</i> .
--------------------------------	--

<b><math>FULL\ LOAD_{k,base}</math></b> $\equiv$	Baseline Full Load - the maximum operating load of each baseline system and subsystem during the <i>Performance Hours</i> with operating condition <i>k</i> (as defined below), exclusive of non operating time.
<b><math>LF_{k,base}</math></b> $\equiv$	Load Factor - fraction of Full Load for each baseline system and subsystem with operating condition <i>k</i> (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.
<b><math>CF_{k,base}</math></b> $\equiv$	<i>Coincidence Factor</i> - the Coincidence Factor is the fraction of time that each baseline system and subsystem is operating during the <i>Performance Hours</i> for operating condition <i>k</i> (as defined below). The three typical conditions for CF are as follows: CF is unity if the equipment is continuously on during the <i>Performance Hours</i> ; CF is zero for each system or subsystem that is not operating during the <i>Performance Hours</i> ; otherwise, CF is the ratio of the 'on' time to the total number of performance hours.
<b><math>k</math></b> $\equiv$	System Condition - refers to each distinct combination of the system mode, Full Load demand, and Load Factor for each system or subsystem operating during <i>Performance Hours</i> . Refer to example below.
<b><math>n</math></b> $\equiv$	Number of Terms – total Number of Terms needed to cover all operating modes of affected systems and subsystems during <i>Performance Hours</i> .

The analysis shall include documentation of how the load varies during the *Performance Hours*. For constant load equipment, the analysis shall be based on the equipment load and operating schedule during the *Performance Hours*. For variable load equipment, the analysis shall address variations in equipment load and operating schedule during the *Performance Hours*.

Additional analysis will typically be prepared to address the impact of the baseline equipment on customer peak demand. Such analysis is critical to calculating customer cost savings but should not be confused with the required calculation of the coincident demand during the *Performance Hours*.

#### Savings

Savings shall be calculated from the efficient case and baseline case energy and demand calculations from above. Address project variables as described in Section 3 and aggregate so that interactive effects are accurately accounted for in the analysis.

**Annual Energy Savings (kWh for electrical, therms for gas)**

$$ENERGY_{saved} = ENERGY_{base} - ENERGY_{eff}$$

where

**$ENERGY_{base}$**  and  **$ENERGY_{eff}$**  are defined above.

**Coincident Electrical Demand Reduction (kW) =**

$$C\ LOAD_{saved} = C\ LOAD_{base} - C\ LOAD_{eff}$$

where

**$CLOAD_{base}$**  and  **$CLOAD_{eff}$**  are defined above.

### Section 3: Project Variables

Accurately capturing and documenting the variables that affect annual energy use and savings as well as those affecting peak period demand coincidence are critical elements in developing meaningful and reliable energy savings estimates. The savings analysis shall consider and address the variables over the life of the measure for both the baseline and efficient case. Uncertainty in variables shall be quantified and the savings analysis shall clearly demonstrate transparency and reasonableness in definition and application of variables affecting energy savings<sup>729</sup>.

The variables below are common to many custom energy analyses. Document the variables that affect the energy use of the project for both the baseline and efficient scenarios and delineate the methods used for data collection (i.e. meter data, trend logs, manufacturer data, customer interviews, production logs, etc.) and any uncertainty associated with the values used in the analysis. **ALL** savings calculations must be *normalized* to reflect consistent application of the assumed variables for the project under both baseline and post installation conditions over the full range of operating conditions for the affected systems.

#### Load Characterization

Accurate characterization of the baseline and efficient energy use involves a comprehensive analysis of all variables that affect the loads over the analysis period. Concepts that are commonly used in performing energy analysis are discussed below. In all cases it is the intent of this document to require that the variations in load due to all factors (weather, production, schedule, etc) are accounted for in the analysis.

##### Load Shape

The load shape reflects variations in load over the course of a year, with specific attention paid to the peak periods defined by the affected utility and/or regional transmission organization. The load shape should capture the expected period at which the load will operate at full load (full load hours) as well as all part load and non-operating or standby-modes. For highly variable loads, development of an 8760 load shape will increase the accuracy of the analysis and the reliability of claimed demand reductions during peak periods<sup>730</sup>.

##### Load Factor

Load factor is the ratio of maximum energy demand to the average electric demand for the affected end use. Analysis of loads across a representative sample of operating conditions can generate a single load factor for constant load applications. For variable load applications, a series of load factors must be developed to accurately represent the variations in energy use under the variety of loading conditions that occur over the range of operating cycles in a typical calendar year. Variable load analysis shall address the variations in load factor over a one year period for all dependent variables.

##### Peak Load Factor

Peak Load Factor describes the variation between the maximum connected load of the equipment and the highest actual load of the equipment. In some cases the peak load factor is unity. For oversized equipment it is frequently less than one. In some rare instances where equipment is operated above its rated load, the peak load factor may be greater than one.

---

<sup>729</sup> Anne Arquitt Niederberger, PhD, A+B International (2005), Baseline Methodologies for Industrial End-Use Efficiency Presentation. Presented at World Bank; Anne\_Arquitt\_Niederberger\_Industry\_EE\_CDM\_Dec\_05.xls

<sup>730</sup> Patil, Yogesh, et. al. (Aug, 2009) "Taking Engineering Savings to the Next Level, presented at IEPEC 2009 <http://www.ers-inc.com/images/articles/Papers/takingsavingstonextlevel.pdf>



### **Coincidence Factor**

Coincidence Factor is the coincidence of the demand savings during the *Peak Performance Hours*. For custom Equipment Replacement measures, the average coincident demand, including non-operational hours, is typically determined by metering the post-installation condition and deriving the Coincidence Factor for the pre-installation condition from the metered data. However, in some cases, the use of a known or predetermined published Coincidence Factor, such as measure specific coincidence factors identified in other sections of the TRM is acceptable.

An example of Coincidence Factor derivation from metered data would be a stepped demand device such as a high efficiency compressor. Based on post-installation metering, a Coincidence Factor can be calculated and applied to the baseline equipment when the baseline operating schedule is the same as the efficient operating schedule. In this case, the Coincidence Factor is defined as the ratio of average metered demand for the *Peak Performance Hours* and max 'equipment on' demand when operating. If the equipment is operating continuously for the full peak performance hours, then the coincidence factor is 1.00.

### **Operating Conditions**

Characterize all variable operating conditions that affect the load over the analysis period. Typical operating variables are outlined below. Additional factors may be required to accurately characterize variability in equipment operations and the energy savings resulting from energy efficiency measures over the full range of operating conditions.

### **Operating Hours**

Establish the baseline and post-installation operating hours for all affected equipment using logging, metering, and/or DDC trending for a representative period of not less than one week. Where pre- and post-installation operating schedules are the same, use of pre- or post-logging of operating hours to prepare the analysis is adequate. Address all variations in operating schedule over an annual operating cycle including, but not limited to weekends, holidays, and shift or occupancy changes that are a result in cyclical changes in operations over the course of a year. (For example retail applications may have longer operating hours in November and December). Project analysis shall clearly identify all operating, non-operating, and standby hours, the related loads, the periods for which those conditions apply and the basis for the assumptions in the analysis. Special attention should be paid that the hours of *Coincident Peak* (3:00 – 6:00 weekdays from June 1 through August 31) are detailed.

### **Weather**

For weather-dependent projects, the analysis shall address the impact of annual weather, including temperature, humidity, and solar incidence (where applicable) on energy consumption. All savings (energy and demand) should be normalized to the TMY3 (Typical Meteorological Year) that corresponds to the nearest TMY3 weather site using modeling and/or regression analysis. TMY3 data should be obtained from National Renewable Energy Laboratory (NREL<sup>731</sup>) and used as the 8760 weather file to model and/or normalize annual energy use for weather dependent measures. Modeling tools, such as eQuest<sup>732</sup>, currently use TMY2 data. TMY3 data is based on more-recent and more accurate data and is available for many more locations; TMY3 data is available for over 1,000 locations, where TMY2 data is available for fewer than 300 locations.

Projects with hourly correlation of metered or utility billed usage to local weather conditions should be done using National Oceanic and Atmospheric Administration (NOAA<sup>733</sup>) or NREL data. NOAA weather data is available for a small fee downloadable from the Internet and is typically the most accurate and complete historical local weather data set. NREL data is free but typically has some gaps in the data and is emailed in response to specific requests. Caution should be exercised when using non-government generated weather data as it may not meet accepted standards for quality and accuracy.

<sup>731</sup> Typical Meteorological Data (TMY3) - [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/)

<sup>732</sup> DOE2 eQuest simulation software - <http://www.doe2.com/equest/>

<sup>733</sup> NOAA local weather data - <http://cdo.ncdc.noaa.gov/qcled/QCLCD?prior=N>

## **Production**

Project analysis shall reflect variations in production over the cycles within the analysis period. Variations can include such things as the number of shifts or changes in quantity or type of product manufactured.

For industrial process measures, production documentation shall normalize energy use based on the energy intensity of the process (i.e. energy use per unit of output) over the lifetime of the measure for both the baseline and efficient cases. Measurement of output should be based on physical measures of output (i.e. ton of steel or paper) and capture variations in both production levels and manufactured product types over the analysis period for both the calculated baseline and the metered efficient case<sup>734</sup>. Post-installation metering shall include documentation of production output during metering periods; work with plant personnel to ensure logged production data accurately reflects changes in production over the metering period.

Assumptions regarding economic climate, changes in production levels, and shifts all affect calculated energy savings over the life of the measures. Develop reasonable assumptions regarding these variables and ensure the application of these variables is clearly identified in both the analysis and project documentation. Identify the uncertainty introduced into the energy savings estimates as a result of these assumptions.

## **Controls**

Control settings and level of control shall be accounted for in the analysis. Clearly document the control points that affect energy use, the control setpoints, sequence of operation and accuracy of controls that would have been used in the baseline case. Clearly document the changes in these conditions for the efficient case. Include relevant information such as commissioning of control points, potential manual overrides of control sequences and anticipated control point calibration over the life of the measure.

## **Occupancy**

Where occupancy affects energy use and varies over time, capture the variations in occupancy and their effects over the analysis period. At a minimum there is typically an 'occupied' and an 'unoccupied' mode for most facilities.

Assumptions regarding economic climate and shifts in hours of occupancy affect calculated energy savings over the life of the measures. Develop reasonable assumptions regarding these variables and ensure the application of these variables is clearly identified in both the analysis and project documentation. Identify the uncertainty introduced into the energy savings estimates as a result of these assumptions

## **Interactive Effects**

Analysis shall explicitly account for interactive effects between measures. For projects that include both prescriptive and custom measures, account for the energy use reduction from the prescriptive measure in the custom measure analysis. As prescriptive measures include interactive effects themselves, document the methodology that is used to ensure that savings from the interactive effects are only accounted for once in the claimed savings.

One common set of interactive effects is the impact of electrical energy efficiency measures within a facility on that facility's heating and/or cooling load. These shall be addressed as follows:

## **Waste Heat**

For efficiency upgrades that reduce the rejection of waste heat into air conditioned spaces (i.e. evaporator fans in a refrigerated enclosure), quantify the reduction in heat rejection<sup>735</sup> and the associated cooling reduction.

---

<sup>734</sup> Ruth, Michael, Lawrence Berkeley National Laboratory, et. al. (2001) A Process-Step Benchmarking Approach to Energy Use at Industrial Facilities: Examples from the Iron and Steel and Cement Industries; Process\_Step\_Benchmarking\_ACEEE\_LBNL-50444.doc

<sup>735</sup> 2009 ASHRAE Handbook, Fundamentals, Chapter 18, page 18.3.

**Heating Increase**

For efficiency upgrades that reduce the rejection of waste heat into heated spaces, quantify the additional heating fuel required to offset the change and maintain temperature within the space<sup>14</sup>. The analysis shall address heating system efficiency and include basis for assumptions regarding fossil fuel increases.

For projects with multiple measures, the procedure for interactive effects is to calculate savings for the longest lived measure first, then consider that measure's impact on the next longest-lived measure, and so on. This is because a short-lived measure can affect savings from a long-lived measure, but only for part of its life. Since tracking system limitations require that annual measure savings remain constant for all years, this is the only way to ensure proper lifetime savings and total resource benefits are captured.

**Measure Life**

Document both the life of the baseline and efficient case equipment. The efficient case analysis is typically performed over the lifetime of the efficiency measures. Where the analysis period and the efficiency measure life are not the same, describe the rationale for the analysis period and assumptions regarding replacement equipment for measures with lives that are shorter than the analysis period.

**Persistence**

Persistence factors may be used to reduce lifetime measure savings in recognition that initial engineering estimates of annual savings may not persist long term<sup>736</sup>. The persistence factor accounts for uncertainties and for normal operations over the life of the measure. For instance if energy efficient motors are installed as part of a process and the customer's standard procedure is to have motors rewound upon failure, the energy efficiency associated with the efficient motor would only persist until the expected time when the motor is rewound. Persistence is also affected by measures being removed or failing prior to the end of its normal engineering lifetime, improper maintained over the life of the measure, control overrides or loss of calibration (controls only), etc.

**Related Variables:**

Related variables are those which are not included in the energy and demand calculations, but may be required for project cost-effectiveness screening by the utility(ies). Document the following variables for the project:

**Operation & Maintenance (O&M) Impacts**

Where O&M practices would have resulted in changes to the baseline during the analysis period, account for such practices in the establishment of baseline and efficiency case energy use.

**Water Consumption Impacts**

Quantify any changes in water consumption attributable to the project.

**Cost**

Document the cost of each measure. Include invoices, bids and other documentation to substantiate project cost data. Identify portions of the cost which are for equipment being purchased for redundancy or backup and will not generate savings in the project. Related costs such as the costs for audits, design, engineering, permits, fees or M&V should be reported separately from the costs associated with the design and installation of energy efficiency improvements.

**Other Variables**

As needed - clearly document all variables affecting the energy use of the project that have not been covered in this document.

**Section 4: Documentation and Metering**

---

<sup>736</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February 19, 2010

Documentation and metering of custom projects are essential to developing reliable energy savings and Coincident Electrical Demand reduction claims.<sup>737</sup> The following guidelines support the accurate estimation of energy and demand savings.

### **Data and Metering**

Document how the data will be collected and utilized in the savings analysis in a Measurement and Verification (M&V) Plan. The Custom Analysis Template (Appendix B) can be used as a tool to document the M&V plan and analysis<sup>738</sup>. Metering for Equipment Replacement projects is typically conducted post-installation to establish the Coincidence Factor, operating hours and Load Factor. Where measures include a control component, metering of these factors in the baseline condition is necessary to accurately establish the baseline.

### **Interval and Utility Data**

Utility interval data is typically not useful in analyzing equipment replacement projects because the baseline condition is not represented in the utility billing data.

For completed mercantile projects in existing facilities, project documentation shall include two - three years of utility billing information from years PRIOR to measure installation and up to three years of utility data post installation in accordance with PUCO requirements.

### **Meter Data**

Accuracy of all metering and measurement equipment shall be documented in the M&V Plan.

Document the metering methods including equipment type, location of metering equipment, and equipment set up process, as well as metering duration and timeframe for which data was collected. Capture all variables that affect energy use of the measures during the metering period as outlined in Section 3.

Describe how the metered data, including timeframe and operational factors at the time of metering, relate to the operational conditions that occur over the course of a year. Provide photographs of meter installation and clear documentation of meter numbers and the associated equipment names of the equipment being metered in the project documentation. Meter data files should clearly identify the equipment to which the meter data applies.

For variable loads, three-phase power data loggers shall be used to collect electrical power data for systems and subsystems of the custom measure<sup>739</sup>. For constant loads, accurate spot reading of the load coupled with runtime logging is an acceptable metering methodology. Temperature and time of use loggers can be used to meter proxy variables, equipment status, and runtimes. Ensure that proxy variable metering yields calculated kW values in compliance with PJM<sup>740</sup> Section 11 requirements.

Three-phase power data loggers shall record: amperage, voltage, power factor, and kW on all phases as well as the totals for each variable. All electrical power metering shall adequately account for harmonics<sup>741</sup>. Logging shall capture equipment load under representative operating conditions. The time period of logging shall be adequate to represent variations in load that will occur over the analysis period. Where feasible, use metering or data logging to capture variables affecting load during the metering period. Where variables cannot be captured using meters or data loggers, institute and clearly document a method for accurately capturing variables, validating non-metered data, and aligning it with metered data. Metering periods shall be a minimum of one week, including a weekend, for constant load equipment and

---

<sup>737</sup> Parlin, Kathryn, et. al. (August, 2009 IEPEC) "Demand Reduction in the Forward Capacity Market, Verifying the Efficiency Power Plant"

<sup>738</sup> IPMVP, Volume III, Part I, January 2006, Chapter 3, page 7 through 10, and PJM Manual 18B, April 2009, section 2, page 10 through 14

<sup>739</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Section 11, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

<sup>740</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Section 11, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

<sup>741</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Section 11, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

at least two weeks, including weekends, for variable load equipment, but as noted above, must be long enough to capture representative variations in load expected over the entire analysis period.

Integrating/averaging three-phase power meters are desirable. Power metering accuracy requirements are outlined in PJM Manual 18B<sup>742</sup> and RLW Analytics Review of ISO New England Measurement and Verification Equipment Requirements<sup>743</sup>. Metering intervals shall be the smallest time interval that will permit acquisition of data over the minimum required metering period. For short-cycling or modulating systems, 30-second or 1-minute data intervals are preferred, with a maximum recommended interval of 5 minutes. For constant load systems, the metering interval can be longer. No metering interval should exceed 15 minutes. Clearly document how meter intervals and meter periods capture the expected load variations for the project.

Meters and data loggers shall be synchronized to the NIST time clock, and differences between the time at the facility and the NIST time setting should be noted when the meters are installed.

#### **DDC/PLC Monitor Data**

Use of DDC and PLC monitoring software trends in the analysis is acceptable provided that the sensors are calibrated on site using calibrated test instruments and the results documented by the energy analyst before the metering period commences. Review and submission of annual equipment calibration records for DDC sensors and metering equipment is a less desirable, but acceptable alternative to calibration of DDC equipment as part of the project. Timestamps for trends should be set up to coincide with those of any concurrently deployed data loggers to enable accurate data analysis.

#### **Load Profiles**

For measures with well established and reliable load profiles, the load profile can be a useful tool for determining savings. Load profiles are most reliable when used for common measures in typical applications, such as office lighting projects. Typically, load profiles should not be relied on where project peak demand savings exceed 20 kW.

### **General Procedures for Data Analysis**

#### **Data Cleaning**

It is usually necessary to ‘clean’ the raw data before proceeding with the analysis. The following data cleaning tasks are typically required.

Ensure that the timestamps match between datasets (e.g. for concurrent kW and temperature datasets), and that any gaps in the data which are not representative of typical operation have been addressed by interpolation or other means. Interpolated or derived data shall be flagged, and the method used to fill in data gaps shall be described.

Note that in preparing the data for use in the 8760 analysis, there will likely be blocks of time during the metering period that will be analyzed differently. For example, during regular business hours a load may be temperature dependent and the data will be analyzed using a regression analysis of kW vs. outdoor air temperature; whereas the same piece of equipment on the weekend may have a constant standby load and is thus schedule driven and non-temperature dependent on the weekends. Different blocks of the 8760 hours in a year will be populated from the separate analyses of the distinct blocks of meter data.

---

<sup>742</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

<sup>743</sup> RLW Analytics, Review of ISO New England Measurement and Verification Equipment Requirements, Final Report, April 24, 2008 Prepared for: Northeast Energy Efficiency Partnerships’ Evaluation and State Program Working Group; RLW Metering Report.pdf

## Annualization and Analysis Approach

The recommended approach to annualization of meter data and savings calculations is an 8760 analysis<sup>744</sup>. This approach inherently captures seasonality and peak period variability on an hourly basis and is therefore more accurate than other traditional methods such as binned analysis.

Typical approaches to analyzing custom measures include:

- Demand vs. temperature analysis for temperature dependent measures.
- Daily operating profiles for schedule-driven measures
- Cyclical production profiles for production-related measures

These methods should address part load performance, and may employ different metrics such as:

- Demand vs. percent capacity
- Demand/Ton vs. percent capacity
- Demand vs. hours
- Demand per ton, pound, cubic foot or quantity

## Calculations

Clearly document all calculations. Indicate how the meter data is used in the analysis and why this is appropriate for the measure. Meter data used in the analysis shall be clearly distinguished from data not used in the analysis.

Computer simulation of energy efficiency measures based on meter data using 8760 hourly simulation models such as eQuest, or customized spreadsheet analysis or other energy analysis tools can be employed to calculate energy savings. The algorithms of the modeling software must be designed to address the custom measure. Minimum documentation requirements include model output reports stating unmet load hours for the baseline and efficient case, hourly energy use and demand, and electronic copies of the model or spreadsheet analysis files.

Annual kWh and therms for baseline and efficient cases shall be the annualized and normalized per the equations in Section 2 using the methods described above. Coincident Electric Demand for baseline and efficient cases shall be calculated from post-installation meter data as the average demand over the *Performance Hours* as indicated in Section 2. Calculation documentation shall include definitions and reference sources for all variables and assumed factors in Section 3.

## Documentation

Analysis shall be documented with comprehensive, well labeled supporting information including, but not limited to:

Manufacturer literature documenting connected load for both the baseline and the installed equipment or manufacturer data documenting the information necessary to calculate peak demand (such as horsepower, voltage, efficiency, etc.) shall be included in the project documentation. Manufacturer data shall be clearly marked to indicate the specific equipment model number and data that is applicable to the project and used in the calculations.

Where citing nameplate ratings in the analysis, provide documentation of the ratings.

---

<sup>744</sup> Patil, Yogesh, et. al. (Aug, 2009) "Taking Engineering Savings to the Next Level, presented at IEPEC 2009; <http://www.ers-inc.com/images/articles/Papers/takingsavingstonextlevel.pdf>

Manufacturer data shall be adjusted to reflect actual site operating conditions. Document calculation of the adjusted connected load reflecting metered on site conditions.

## **Reporting**

The following metrics and details shall be reported:

- All information required in this protocol
- M&V Plan/Analysis Template
- Regression  $R^2$  values for fits of demand vs. proxy variables.
- Cleaned meter data (raw data shall be included as an appendix) clearly indicating which data was used in the savings analysis
- Discussion of approach to anomalies, outliers, interpolations and extrapolations in the analysis
- Assessment of the level of uncertainty associated with the energy and demand calculated savings.
- Project commissioning can reduce energy use and is recommended. If the project was commissioned, submit a copy of the commissioning report.

## C&I Retrofit – Custom Measure Analysis Protocol

This protocol defines the requirements for analyzing and documenting commercial and industrial energy efficiency measures. It applies to custom measures filed under Utility Programs and those prepared for Mercantile Customers. This protocol addresses retrofit measures that are not covered by other analysis methodologies in the TRM. A retrofit project is defined as equipment replacement prior to the end of its rated service life in order to achieve energy savings. Where equipment is replaced due to failure or for other reasons (such as obsolescence or a need for increased capacity), the project is classified as Equipment Replacement and the “C&I Equipment Replacement – Custom Measure Analysis Protocol” should be used to guide analysis.

This protocol is intended to address the energy impacts of the operating energy efficiency improvements. Projects that include duplex, redundant and/or spare equipment shall calculate the energy savings based only on the operating equipment and systems.

This analysis protocol is supplemented by a glossary and an Analysis Template (Appendix B). Words used herein that are defined in the glossary are in *italics*. The Analysis Template is a tool that can guide applicants in preparing and presenting the documentation to support custom retrofit energy efficiency measure savings estimates.

The Analysis Protocol and Analysis Template are divided into four sections:

Section 1: Project Information

Section 2: Project Savings

Section 3: Project Variables

Section 4: Documentation and Metering

### Section 1: Project Information

#### Project Title

Provide a unique title for the project so that it is easily distinguishable from other projects prepared by the same customer and from projects with similar scope. Example: Company XYZ Building A - Compressed Air System Improvements.

#### Customer Name

Provide the name of the company undertaking the energy efficiency improvements.

#### Customer Contact

Provide the contact information including name, title, mailing address, phone, and email for the primary customer contact on this project.

#### Site (Location)

Provide the full address of the site at which the project is being implemented. If the customer has an additional business location that is involved with the project, include additional customer site information as needed.

#### Sector/Industry Description and NAICS Code

Describe the sector and industry in which the custom measure is being applied. Sectors include: Industrial, Commercial, Institutional, and Multi-family. Industry should specify the end use for commercial and institutional projects (e.g. office, restaurant, dormitory) and the specific industry for manufacturing projects<sup>745</sup>.

#### Utility(ies) Information

The name of the affected utility(ies) serving the customer. Provide all relevant account and meter information for electric and gas accounts and meters affected by the project.

#### Program

---

<sup>745</sup> 2007 NAICS; North American Industry Classification System; <http://www.census.gov/cgi-bin/sssd/naics/naicsrch?chart=2007>



Identify the program under which this project will be submitted and why the project falls under the program. Projects submitted under existing utility programs should identify the program under which the project application will be filed and the utility-specific identifier for the project. Projects being submitted under the Mercantile Program should so indicate.

#### **Project/Technology Description**

Describe the energy using equipment and systems affected by the project in lay terms. Include specific information regarding industrial process technologies. For example: “Replace two 10ft constant speed 10,000 CFM fume hoods with modulating fume hoods controlled by smoke and temperature sensors.”

#### **Project Implementation Schedule**

Define the implementation schedule for the project, including start and completion dates.

#### **Measures Included in the Project**

All energy efficiency measures included in the project shall be clearly identified and savings calculations and estimates shall be clearly documented for each measure in accordance with this protocol.

#### **Affected Energy Sources (Electric, Gas, Other)**

Identify all affected *energy sources* (electric, gas, propane, oil, solar, etc.) for the project, provide a brief description of how the source energy use is affected and quantify the impacts in the analysis.

#### **Analysis Firm(s) and Contact(s)**

Provide information regarding the firm performing the engineering analysis of the custom project. Provide the name(s) of the contacts for the firm(s) and contact information including company name, individual(s) name, address, phone, and email.

## **Section 2: Energy Consumption and Demand**

This section defines the requirements for calculating baseline and efficient case energy consumption and demand as well as the method for calculating savings. Calculations shall address all project variables in accordance with the requirements of Section 3 and undertake the analysis in accordance with the documentation and metering requirements in Section 4.

The equations used in this protocol assume that the project has a single measure. If the project has multiple measures, these calculations shall be repeated for each measure in such a way as to capture interactive effects.

### **Efficient Case**

#### **Efficient Technology Description and Documentation**

Describe the new technology, measure, and/or change in operations, and how it saves energy. Document any relevant efficiency codes or federal/state/local standards that apply to the proposed efficient equipment and the ratings of the measure equipment in comparison with applicable standards. If the efficient measure was the result of a process improvement that provides additional benefits, such as waste reduction, clearly describe all of the ways that the new process saves energy and resources. This can include reductions in areas such as waste heat, O&M costs, labor costs, water consumption, or process waste.

#### **Efficient Case Annual Energy Use**

Calculate the annual energy use for the proposed equipment using the methodologies outlined in this protocol and all referenced and applicable standards.

The total efficient energy use shall be calculated separately for each *energy source* (e.g. electric and gas) according to the following equations.

For loads calculated from a regression analysis (e.g. kW vs. Temperature as described in Section 4) the following equation shall be used:

$$ENERGY_{eff} = \sum_{j=1}^m (E\text{ LOAD}_{j,eff} \times HOURS_{j,eff})$$

where

<b>ENERGY<sub>eff</sub></b> ≡	Annual Efficient Energy Use - annual energy use with the efficiency improvement installed, calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>E LOAD<sub>j,eff</sub></b> ≡	Efficient Load (electric kW, gas therms) - efficient load for each system and subsystem with operating condition <i>j</i> (as defined below). For example, efficient load will need to be calculated differently for staged condenser fans that have different operating hours or multiple pumps that operate at varying speeds.
<b>HOURS<sub>j,eff</sub></b> ≡	Total Annual Operating – total annual operating hours for each system and subsystem with operating condition <i>j</i> (as defined below).

For loads calculated based on metering of full load or on equipment specifications:

$$ENERGY_{eff} = \sum_{j=1}^m (FULL\text{ LOAD}_{j,eff} \times LF_{j,eff} \times HOURS_{j,eff})$$

where

<b>ENERGY<sub>eff</sub></b> ≡	Annual Efficient Energy Use - annual energy use with the efficiency improvement installed, calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>FULL LOAD<sub>j,eff</sub></b> ≡	Efficient Full Load - the maximum operating load of each efficient system and subsystem with operating condition <i>j</i> (as defined below).
<b>LF<sub>j,eff</sub></b> ≡	Load Factor - fraction of full load for each efficient system and subsystem with operating condition <i>j</i> (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% or rated capacity.  If needed, LF could be calculated from a regression curve kW and FULL LOAD for distinct operating conditions. This may arise when comparing efficient data with non-metered baseline LF ranges which are not based on a regression curve.
<b>HOURS<sub>j,eff</sub></b> ≡	Total Annual Operating Hours – total annual operating hours for each system and subsystem with operating condition <i>j</i> (as defined below).
<b>j</b> ≡	System Condition - refers to each distinct combination of system mode, number of hours, full load demand, and load factor for each system or subsystem. Refer to example below.
<b>m</b> ≡	Number of Terms – total number of terms needed to cover all conditions of affected systems and subsystems.

### Efficient Case Coincident Electric Demand (kW)

Document the efficient case coincident electric demand for each measure according to one of the following equations:

For variable loads:

$$C\text{ LOAD}_{eff} = AVG\ PH\ LOAD_{eff}$$

Where

**AVG PH LOAD<sub>eff</sub>** ≡ Average Efficient Load of all affected equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours* and is equal to total energy use during the *Performance Hours* divided by the total *Performance Hours*.

For constant loads or loads without metered data:

$$C\text{ LOAD}_{eff} = \sum_{k=1}^n (FULL\ LOAD_{k,eff} \times LF_{k,eff} \times CF_{k,eff})$$

where

**C LOAD<sub>eff</sub>** ≡ Average Coincident Efficient Load – Average Coincident Load of all affected efficient equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours*.

**FULL LOAD<sub>k,eff</sub>** ≡ Efficient Full Load - the maximum operating load of each efficient system and subsystem during the *Performance Hours* with operating condition *k* (as defined below), exclusive of non operating time.

**LF<sub>k,eff</sub>** ≡ Load Factor - fraction of Full Load for each efficient system and subsystem with operating condition *k* (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.

**CF<sub>k,eff</sub>** ≡ *Coincidence Factor* - the Coincidence Factor is the fraction of time that each efficient system and subsystem is operating during the *Performance Hours* for operating condition *k* (as defined below). The three typical conditions for CF are as follows: CF is unity if the equipment is continuously on during the *Performance Hours*; CF is zero for each system or subsystem that is not operating during the *Performance Hours*; otherwise, CF is the ratio of the 'on' time to the total number of performance hours.

**k** ≡ System Condition - refers to each distinct combination of the system mode, Full Load demand, and Load Factor for each system or subsystem operating during the *Performance Hours*. Refer to example below.

**n** ≡ Number of Terms – total Number of Terms needed to cover all operating modes of affected systems and subsystems during *Performance Hours*.

The analysis shall include documentation of how the load varies during the *Performance Hours*. For constant load equipment, the analysis shall be based on the equipment load and operating schedule during the performance hours. For variable load equipment, the analysis shall address variations in equipment load and operating schedule during the performance hours.

Additional analysis will typically be prepared to address the impact of the energy efficiency measure on customer peak demand. Such analysis is critical to calculating customer cost savings but should not be confused with the required calculation of the coincident demand during the performance hours.

## **Baseline Case**

### **Baseline Technology Methodology and Description**

Energy efficiency retrofit projects involve the replacement of existing equipment prior to the end of its useful life in order to achieve energy savings. Therefore, the existing equipment may be used to establish the project baseline. The analysis must account for the remaining life of the existing equipment, and if the analysis period extends beyond the remaining life of the existing equipment, the analysis shall account for increases in efficiency that would have occurred through autonomous efficiency improvements or equipment replacement that would have occurred at the end of the existing equipment life in the absence of early retirement. The baseline description shall detail the baseline technology(ies) affected by the measure; including make, model number, nameplate information, and equipment rated capacity, condition, age, lifetime, usage, operating schedule, and controls. The baseline shall also account for upgrades to the equipment that would have occurred during the analysis period absent the early retirement of the equipment.

Retrofit of industrial processes typically yield multiple benefits including energy efficiency, increased *throughput*, reduced waste, improved product quality, new product features, etc. Because of the multiple benefits derived from industrial process improvements, the characterization of these measures does not cleanly fall into either the retrofit or equipment replacement category. In order to establish a rigorous industrial process retrofit baseline, the following should be considered:

Derived Baseline – based on documented Industry and Applicant Practice (as described below), the engineer performing the analysis shall develop a reasonable project baseline. Clearly describe why the baseline and characterization of the project as retrofit is appropriate and demonstrate how the derived baseline accounts for autonomous upgrades in practice over the analysis period.

Current Industry Practice – document current industry practice using articles from industry journals, EIA industry specific energy intensity figures,<sup>746</sup> and independent industry specific studies. Where information regarding industry practice is provided by manufacturers who sell production equipment within the industry, it shall be supported by independent research.

Applicant Practice – document the corporate practices of the applicant through annual reports, published papers, internal memos, and other documents that indicate the business practices of the applicant relative to current practice in the industry. Document the practices and equipment within the facility receiving the upgrade. For instance, if an injection molding manufacturer is replacing hydraulic machines with electric machines on an annual basis, using the hydraulic equipment as baseline may not be representative of the actual baseline. For production equipment replacements, a Process Integration Study<sup>747</sup> is a strong tool in documenting the project's focus on energy efficiency and the optimization of energy use.<sup>748</sup>

---

<sup>746</sup> Department of Energy, Energy Information Administration, Manufacturing Energy Consumption Survey, <http://www.eia.doe.gov/emeu/mecs/contents.html>

<sup>747</sup> Natural Resources Canada, Process Integration, A Systematic Approach for Optimisation of Industrial Processes, [http://canmetenergy-canmetenergie.nrcan-rncan.gc.ca/fichier.php/codectec/En/2009-046/2009-046\\_en.pdf](http://canmetenergy-canmetenergie.nrcan-rncan.gc.ca/fichier.php/codectec/En/2009-046/2009-046_en.pdf)

<sup>748</sup> Department of Energy, Industrial Efficiency Report, 1993, <http://www.fas.org/ota/reports/9330.pdf>

Baseline Energy Intensity – for industrial process, the baseline should be defined in terms of *energy intensity* and normalized to reflect the expected variations in production over various production cycles<sup>749</sup>.

Describe in detail the method used to establish the energy use under baseline conditions. If metering was used; explain the methodology, how this is representative of typical annual operation and how the collected data was normalized to annual operation as described in Section 4.

#### Baseline Case Annual Energy Use

Calculate the annual energy use for the baseline equipment and systems using the methodologies outlined in this protocol and all referenced and applicable standards.

The total baseline energy use shall be calculated separately for each *energy source* (e.g. electric and gas) according to the following equations.

For loads calculated from a regression analysis (e.g. kW vs. Temperature as described in Section 4) the following equation shall be used:

$$ENERGY_{base} = \sum_{j=1}^m (E\ LOAD_{j,base} \times HOURS_{j,base})$$

where

**ENERGY<sub>base</sub>** ≡ Annual Baseline Energy Use - Annual Energy Use for baseline equipment calculated separately for each measure and each *energy source* (electric, gas).

**E LOAD<sub>j,base</sub>** ≡ Baseline Load (electric kW, gas therms) - Baseline Load for each system and subsystem with operating condition *j* (as defined below). For example, Baseline Load will need to be calculated differently for staged condenser fans that have different operating hours or multiple pumps that operate at varying speeds.

**HOURS<sub>j,base</sub>** ≡ Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition *j* (as defined below).

For loads calculated based on metering of full load or on equipment specifications:

$$ENERGY_{base} = \sum_{j=1}^m (FULL\ LOAD_{j,base} \times LF_{j,base} \times HOURS_{j,base})$$

where

**ENERGY<sub>base</sub>** ≡ Annual Baseline Energy Use - Annual Energy Use for baseline equipment calculated separately for each measure and each *energy source* (electric, gas).

**FULL LOAD<sub>j,base</sub>** ≡ Baseline Full Load - the maximum operating load of each baseline system and subsystem with operating condition *j* (as defined below).

<sup>749</sup> Ruth, Michael, Lawrence Berkeley National Laboratory, et. al. (2001) A Process-Step Benchmarking Approach to Energy Use at Industrial Facilities: Examples from the Iron and Steel and Cement Industries; Process\_Step\_Benchmarking\_ACEEE\_LBNL-50444.doc

<b><math>LF_{j,base}</math></b> $\equiv$	Load Factor - fraction of Full Load for each baseline system and subsystem with operating condition $j$ (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.
<b><math>HOURS_{j,base}</math></b> $\equiv$	Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition $j$ (as defined below).
<b><math>j</math></b> $\equiv$	System Condition - refers to each distinct combination of system mode, number of hours, Full Load demand, and Load Factor for each system or subsystem. Refer to example below.
<b><math>m</math></b> $\equiv$	Number of Terms – total Number of Terms needed to cover all conditions of affected systems and subsystems.

### Baseline Case Full Load Demand

Document the baseline case coincident electric demand for each measure according to one of the following equations:

For variable loads:

$$C\,LOAD_{base} = AVG\,PH\,LOAD_{base}$$

Where

**$AVG\,PH\,LOAD_{base}$**   $\equiv$  Average Baseline Load of all affected equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours* and is equal to total energy use during the *Performance Hours* divided by the total *Performance Hours*.

For constant loads or loads without metered data:

$$C\,LOAD_{base} = \sum_{k=1}^m (FULL\,LOAD_{k,base} \times LF_{k,base} \times CF_{k,base})$$

where

**$C\,LOAD_{base}$**   $\equiv$  Average Coincident Baseline Load – average coincident load of all affected baseline equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours*.

**$FULL\,LOAD_{k,base}$**   $\equiv$  Baseline Full Load - the maximum operating load of each baseline system and subsystem during the *Performance Hours* with operating condition  $k$  (as defined below), exclusive of non operating time.

**$LF_{k,base}$**   $\equiv$  Load Factor - fraction of Full Load for each baseline system and subsystem with operating condition  $k$  (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.

<b><math>CF_{k,base}</math></b> $\equiv$	<i>Coincidence Factor</i> - the Coincidence Factor is the fraction of time that each baseline system and subsystem is operating during the <i>Performance Hours</i> for operating condition <i>k</i> (as defined below). The three typical conditions for CF are as follows: CF is unity if the equipment is continuously on during the <i>Performance Hours</i> ; CF is zero for each system or subsystem that is not operating during the <i>Performance Hours</i> ; otherwise, CF is the ratio of the 'on' time to the total number of performance hours.
<b><math>k</math></b> $\equiv$	System Condition - refers to each distinct combination of the system mode, Full Load demand, and Load Factor for each system or subsystem operating during <i>Performance Hours</i> . Refer to example below.
<b><math>n</math></b> $\equiv$	Number of Terms – total Number of Terms needed to cover all operating modes of affected systems and subsystems during <i>Performance Hours</i> .

The analysis shall include documentation of how the load varies during the *Performance Hours*. For constant load equipment, the analysis shall be based on the equipment load and operating schedule during the *Performance Hours*. For variable load equipment, the analysis shall address variations in equipment load and operating schedule during the *Performance Hours*.

Additional analysis will typically be prepared to address the impact of the baseline equipment on customer peak demand. Such analysis is critical to calculating customer cost savings but should not be confused with the required calculation of the coincident demand during the *Performance Hours*.

### Savings

Savings shall be calculated from the efficient case and baseline case energy and demand calculations from above. Address project variables as described in Section 3 and aggregate so that interactive effects are accurately accounted for in the analysis.

Annual Energy Savings (kWh for electrical, therms for gas)

$$ENERGY_{saved} = ENERGY_{base} - ENERGY_{eff}$$

where

**$ENERGY_{base}$**  and  **$ENERGY_{eff}$**  are defined above.

Coincident Electrical Demand Reduction (kW) =

$$C\,LOAD_{saved} = C\,LOAD_{base} - C\,LOAD_{eff}$$

where

**$C\,LOAD_{base}$**  and  **$C\,LOAD_{eff}$**  are defined above.

## Section 3: Project Variables

Accurately capturing and documenting the variables that affect annual energy use and savings as well as those affecting peak period demand coincidence are critical elements in developing meaningful and reliable energy savings estimates. The savings analysis shall consider and address the variables over the life of the measure for both

the baseline and efficient case. Uncertainty in variables shall be quantified and the savings analysis shall clearly demonstrate transparency and reasonableness in definition and application of variables affecting energy savings<sup>750</sup>.

The variables below are common to many custom energy analyses. Document the variables that affect the energy use of the project for both the baseline and efficient scenarios and delineate the methods used for data collection (i.e. meter data, trend logs, manufacturer data, customer interviews, production logs, etc.) and any uncertainty associated with the values used in the analysis. **ALL** savings calculations must be *normalized* to reflect consistent application of the assumed variables for the project under both baseline and post installation conditions over the full range of operating conditions for the affected systems.

### **Load Characterization**

Accurate characterization of the baseline and efficient energy use involves a comprehensive analysis of all variables that affect the loads over the analysis period. Concepts that are commonly used in performing energy analysis are discussed below. In all cases it is the intent of this document to require that the variations in load due to all factors (weather, production, schedule, etc) are accounted for in the analysis.

#### **Load Shape**

The load shape reflects variations in load over the course of a year, with specific attention paid to the peak periods defined by the affected utility and/or regional transmission organization. The load shape should capture the expected period at which the load will operate at full load (full load hours) as well as all part load and non-operating or standby-modes. For highly variable loads, development of an 8760 load shape will increase the accuracy of the analysis and the reliability of claimed demand reductions during peak periods<sup>751</sup>.

#### **Load Factor**

Load factor is the ratio of maximum energy demand to the average electric demand for the affected end use. Analysis of loads across a representative sample of operating conditions can generate a single load factor for constant load applications. For variable load applications, a series of load factors must be developed to accurately represent the variations in energy use under the variety of loading conditions that occur over the range of operating cycles in a typical calendar year. Variable load analysis shall address the variations in load factor over a one year period for all dependent variables.

#### **Peak Load Factor**

Peak load factor describes the variation between the maximum connected load of the equipment and the highest actual load of the equipment. In some cases the peak load factor is unity. For oversized equipment it is frequently less than one. In some rare instances where equipment is operated above its rated load, the peak load factor may be greater than one.

#### **Coincidence Factor**

Coincidence Factor is the coincidence of the demand savings during the *peak performance hours*. For custom measures, the average coincident demand, including non-operational hours, is typically directly determined by metering the pre- and post-installation condition and a coincidence factor is not used in the calculations. However, in some cases, the use of a known or predetermined published coincidence factor to calculate the coincident peak reduction for a project may be appropriate.

Another example of the use of an explicit coincidence factor arises in cases where the baseline demand was not metered and the efficient demand was metered. For a stepped demand device such as a high efficiency compressor, for example, a coincidence factor can be calculated and applied to the baseline equipment to address the fact that the baseline operating schedule used in the calculations should be the same as the efficient operating schedule. In this case, the coincidence factor is defined as the ratio of average metered

---

<sup>750</sup> Anne Arquit Niederberger, PhD, A+B International (2005), Baseline Methodologies for Industrial End-Use Efficiency Presentation. Presented at World Bank; Anne\_Arquit\_Niederberger\_Industry\_EE\_CDM\_Dec\_05.xls

<sup>751</sup> Patil, Yogesh, et. al. (Aug, 2009) "Taking Engineering Savings to the Next Level, presented at IEPEC 2009 <http://www.ers-inc.com/images/articles/Papers/takingsavingstonextlevel.pdf>



demand for the peak performance hours and max ‘equipment on’ demand when operating. If the equipment is operating continuously for the full peak performance hours, then the coincidence factor is 1.00.

### **Operating Conditions**

Characterize all variable operating conditions that affect the load over the analysis period. Typical operating variables are outlined below. Additional factors may be required to accurately characterize variability in equipment operations and the energy savings resulting from energy efficiency measures over the full range of operating conditions.

#### **Operating Hours**

Establish the baseline and post-installation operating hours for all affected equipment using logging, metering, and/or DDC trending for a representative period of not less than one week. Address all variations in operating schedule over an annual operating cycle including, but not limited to weekends, holidays, and shift or occupancy changes that are a result in cyclical changes in operations over the course of a year. (For example retail applications may have longer operating hours in November and December). Project analysis shall clearly identify all operating, non-operating, and standby hours, the related loads, the periods for which those conditions apply and the basis for the assumptions in the analysis. Special attention should be paid that the hours of *Coincident Peak* (3:00 – 6:00 weekdays from June 1 through August 31) are detailed.

#### **Weather**

For weather-dependent projects, the analysis shall address the impact of annual weather, including temperature, humidity, and solar incidence (where applicable) on energy consumption. All savings (energy and demand) should be normalized to the TMY3 (Typical Meteorological Year) that corresponds to the nearest TMY3 weather site using modeling and/or regression analysis. TMY3 data should be obtained from National Renewable Energy Laboratory (NREL<sup>752</sup>) and used as the 8760 weather file to model and/or normalize annual energy use for weather dependent measures. Modeling tools, such as eQuest<sup>753</sup>, currently use TMY2 data. TMY3 data is based on more-recent and more accurate data and is available for many more locations; TMY3 data is available for over 1,000 locations, where TMY2 data is available for fewer than 300 locations.

Projects with hourly correlation of metered or utility billed usage to local weather conditions should be done using National Oceanic and Atmospheric Administration (NOAA<sup>754</sup>) or NREL data. NOAA weather data is available for a small fee downloadable from the Internet and is typically the most accurate and complete historical local weather data set. NREL data is free but typically has some gaps in the data and is emailed in response to specific requests. Caution should be exercised when using non-government generated weather data as it may not meet accepted standards for quality and accuracy.

#### **Production**

Project analysis shall reflect variations in production over the cycles within the analysis period. Variations can include such things as the number of shifts or changes in quantity or type of product manufactured.

For industrial process measures, production documentation shall normalize energy use based on the energy intensity of the process (i.e. energy use per unit of output) over the lifetime of the measure for both the baseline and efficient cases. Measurement of output should be based on physical measures of output (i.e. ton of steel or paper) and capture variations in both production levels and manufactured product types over the analysis period for both the baseline and efficient case<sup>755</sup>. For metered projects, document production output during metering periods; work with plant personnel to ensure logged production data accurately reflects changes in production over the metering period.

---

<sup>752</sup> Typical Meteorological Data (TMY3) - [http://redc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/](http://redc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/)

<sup>753</sup> DOE2 eQuest simulation software - <http://www.doe2.com/equest/>

<sup>754</sup> NOAA local weather data - <http://cdo.ncdc.noaa.gov/qcld/QCLCD?prior=N>

<sup>755</sup> Ruth, Michael, Lawrence Berkeley National Laboratory, et. al. (2001) A Process-Step Benchmarking Approach to Energy Use at Industrial Facilities: Examples from the Iron and Steel and Cement Industries; Process\_Step\_Benchmarking\_ACEEE\_LBNL-50444.doc

Assumptions regarding economic climate, changes in production levels, and shifts all affect calculated energy savings over the life of the measures. Develop reasonable assumptions regarding these variables and ensure the application of these variables is clearly identified in both the analysis and project documentation. Identify the uncertainty introduced into the energy savings estimates as a result of these assumptions.

Process flow charting for manufacturing and production is recommended to clarify energy use and demand impacts for each stage in the process<sup>756</sup>.

### **Controls**

Control settings and level of control shall be accounted for in the analysis. Clearly document the baseline control points that affect energy use, the control setpoints, sequence of operation and accuracy of controls. Clearly document the changes in these conditions for the efficient case. Include relevant information such as commissioning of control points, potential manual overrides of control sequences and anticipated control point calibration over the life of the measure.

### **Occupancy**

Where occupancy affects energy use and varies over time, capture the variations in occupancy and their effects over the analysis period. At a minimum there is typically an 'occupied' and an 'unoccupied' mode for any facility.

Assumptions regarding economic climate and shifts in hours of occupancy affect calculated energy savings over the life of the measures. Develop reasonable assumptions regarding these variables and ensure the application of these variables is clearly identified in both the analysis and project documentation. Identify the uncertainty introduced into the energy savings estimates as a result of these assumptions

### **Interactive Effects**

Analysis shall explicitly account for interactive effects between measures. For projects that include both prescriptive and custom measures, account for the energy use reduction from the prescriptive measure in the custom measure analysis. As prescriptive measures include interactive effects themselves, it will be necessary to remove the interactive effects from the prescriptive measure before including the energy use reduction in the custom measure analysis. Document the methodology that is used to ensure that savings from the interactive effects are only accounted for once in the claimed savings.

Interactive effects should be accounted for even if the technologies involved in the interactive effects are not the subject of energy efficiency improvements or claims under other programs, otherwise savings for custom measures may be overclaimed. The energy analyst should be aware of and request information about other changes or maintenance at the facility that may not be directly related to the custom measure project, or any other claimed project, and shall account for these changes in the analysis if appropriate.

One common set of interactive effects is the impact of electrical energy efficiency measures within a facility on that facility's heating and/or cooling load. These shall be addressed as follows:

#### **Waste Heat**

For efficiency upgrades that reduce the rejection of waste heat into air conditioned spaces (i.e. evaporator fans in a refrigerated enclosure), quantify the reduction in heat rejection<sup>757</sup> and the associated cooling reduction.

#### **Heating Increase**

For efficiency upgrades that reduce the rejection of waste heat into heated spaces, quantify the additional heating fuel required to offset the change and maintain temperature within the space<sup>14</sup>. The analysis shall address heating system efficiency and include basis for assumptions regarding fossil fuel increases.

---

<sup>756</sup> Doty, Commercial Energy Auditing Reference Handbook, p. 65

<sup>757</sup> 2009 ASHRAE Handbook, Fundamentals, Chapter 18, page 18.3.

For projects with multiple measures, the procedure for interactive effects is to calculate savings for the longest lived measure first, then consider that measure's impact on the next longest-lived measure, and so on. This is because a short-lived measure can affect savings from a long-lived measure, but only for part of its life. Since tracking system limitations require that annual measure savings remain constant for all years, this is the only way to ensure proper lifetime savings and total resource benefits are captured. As an example; calibrating DDC controls can increase savings at the time of chiller replacement. Since DDC control calibration has a relatively short measure life, the DDC calibration will affect the savings of the new chiller only for the first few years of its lifetime. When the calibration measure expires, the consumption of the new chiller will increase and the savings associated with the chiller measure will decrease for the remainder of the chiller's lifetime. If DDC calibration is calculated first, the chiller savings in the project will be overstated.

### **Measure Life**

Document both the life of the baseline and efficient case equipment. If the baseline equipment measure life does not extend over the entire analysis period, the analysis shall include assumptions regarding replacement of baseline equipment at the end of its life. The efficient case analysis is typically performed over the lifetime of the efficiency measures. Where the analysis period and the efficiency measure life are not the same, describe the rationale for the analysis period and assumptions regarding replacement equipment for measures with lives that are shorter than the analysis period.

### **Persistence**

Persistence factors may be used to reduce lifetime measure savings in recognition that initial engineering estimates of annual savings may not persist long term<sup>758</sup>. The persistence factor accounts for uncertainties and for normal operations over the life of the measure. For instance if energy efficient motors are installed as part of a process and the customer's standard procedure is to have motors rewound upon failure, the energy efficiency associated with the efficient motor would only persist until the expected time when the motor is rewound. Persistence is also affected by measures being removed or failing prior to the end of its normal engineering lifetime, improper maintained over the life of the measure, control overrides or loss of calibration (controls only), etc.

### **Related Variables:**

Related variables are those which are not included in the energy and demand calculations, but may be required for project cost-effectiveness screening by the utility(ies). Document the following variables for the project:

#### **Operation & Maintenance (O&M) Impacts**

Where O&M practices would have resulted in changes to the baseline during the analysis period, account for such practices in the establishment of baseline and efficiency case energy use.

#### **Water Consumption Impacts**

Quantify any changes in water consumption attributable to the project.

#### **Cost**

Document the cost of each measure. Include invoices, bids and other documentation to substantiate project cost data. Identify portions of the cost which are for equipment being purchased for redundancy or backup and will not generate savings in the project. Related costs such as the costs for audits, design, engineering, permits, fees or M&V should be reported separately from the costs associated with the design and installation of energy efficiency improvements.

### **Other Variables**

As needed - clearly document all variables affecting the energy use of the project that have not been covered in this document.

## **Section 4: Documentation and Metering**

---

<sup>758</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February 19, 2010

Documentation and metering of custom projects are essential to developing reliable energy savings and peak demand reductions claims.<sup>759</sup> The following guidelines support the accurate estimation of energy and demand savings.

## **Data and Metering**

Document how the data will be collected and utilized in the savings analysis in a Measurement and Verification (M&V) Plan. The Custom Analysis Template (Appendix B) can be used as a tool to document the M&V plan and analysis<sup>760</sup>.

### **Interval and Utility Data**

Utility interval data may be used in the analysis where available and applicable. Interval data is deemed applicable when the order of magnitude of the custom measure can be distinguished from the other loads on the meter. If the load on the utility meter is highly variable, the custom measure would need to be a larger portion of the overall load in order for the savings to be determined from the utility data. Typically interval data is available in 15 minute increments; the shortest period available for interval data should be used in the analysis. Where interval data is used, the analysis shall follow the requirements of IPMVP Option C – Whole Building Analysis<sup>761</sup>.

For measures which affect gas usage only, utility data is typically the primary means of quantifying savings. However, use of upstream metering equipment such as flow meters is encouraged to improve the accuracy of gas savings calculations.

For completed mercantile projects in existing facilities, analysis shall include two - three years of utility billing information from years PRIOR to measure installation and up to three years of utility data post-installation in accordance with PUCO requirements.

### **Meter Data**

Accuracy of all metering and measurement equipment shall be documented in the M&V Plan.

Document the metering methods including equipment type, location of metering equipment, and equipment set up process, as well as metering duration and timeframe for which data was collected. Capture all variables that affect energy use of the measures during the metering period as outlined in Section 3. Describe how the metered data, including timeframe and operational factors at the time of metering, relate to the operational conditions that occur over the course of a year. Provide photographs of meter installation and clear documentation of meter numbers and the associated equipment names of the equipment being metered in the project documentation. Meter data files should clearly identify the equipment to which the meter data applies.

For variable loads, three-phase power data loggers shall be used to collect electrical power data for systems and subsystems of the custom measure<sup>762</sup>. For constant loads, accurate spot reading of the load coupled with runtime logging is an acceptable metering methodology. Temperature and time of use loggers can be used to meter proxy variables, equipment status, and runtimes. Ensure that proxy variable metering yields calculated kW values in compliance with PJM Section 11 requirements.

Three-phase power data loggers shall record: amperage, voltage, power factor, and kW on all phases as well as the totals for each variable. All electrical power metering shall adequately account for

---

<sup>759</sup> Parlin, Kathryn, et. al. (August, 2009 IEPEC) “Demand Reduction in the Forward Capacity Market, Verifying the Efficiency Power Plant”

<sup>760</sup> IPMVP, Volume III, Part I, January 2006, Chapter 3, page 7 through 10, and PJM Manual 18B, April 2009, section 2, page 10 through 14

<sup>761</sup> International Performance Measure and Verification Protocol Concepts and Practices for Determining Energy Savings in New Construction, Volume III, Part 1, January 2006.

<sup>762</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Section 11, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

harmonics<sup>763</sup>. Logging shall capture equipment load under representative operating conditions. The time period of logging shall be adequate to represent variations in load that will occur over the analysis period. Where feasible, use metering or data logging to capture variables affecting load during the metering period. Where variables cannot be captured using meters or data loggers, institute and clearly document a method for accurately capturing variables, validating non-metered data, and aligning it with metered data. Metering periods shall be a minimum of one week, including a weekend, for constant load equipment and at least two weeks, including weekends, for variable load equipment, but as noted above, must be long enough to capture representative variations in load expected over the entire analysis period.

Integrating/averaging three phase power meters are desirable. Power metering accuracy requirements are outlined in PJM Manual 18B<sup>764</sup> and RLW Analytics Review of ISO New England Measurement and Verification Equipment Requirements<sup>765</sup>. Metering intervals shall be the smallest time interval that will permit acquisition of data over the minimum required metering period. For short-cycling or modulating systems, 30-second or 1-minute data intervals are preferred, with a maximum recommended interval of 5 minutes. For constant load systems, the metering interval can be longer. No metering interval should exceed 15 minutes. Clearly document how meter intervals and meter periods capture the expected load variations for the project.

Meters and data loggers shall be synchronized to the NIST time clock, and differences between the time at the facility and the NIST time setting should be noted when the meters are installed.

#### **DDC/PLC Monitor Data**

Use of DDC and PLC monitoring software trends in the analysis is acceptable provided that the sensors are calibrated on site using calibrated test instruments and the results documented by the energy analyst before the metering period commences. Review and submission of annual equipment calibration records for DDC sensors and metering equipment is a less desirable, but acceptable alternative to calibration of DDC equipment as part of the project. Timestamps for trends should be set up to coincide with those of any concurrently deployed data loggers to enable accurate data analysis.

#### **Load Profiles**

For measures with well established and reliable load profiles, the load profile can be a useful tool for determining savings. Load profiles are most reliable when used for common measures in typical applications, such as office lighting projects. Typically, load profiles should not be relied on where project peak demand savings exceed 20 kW.

### **General Procedures for Data Analysis**

#### **Data Cleaning**

It is usually necessary to ‘clean’ the raw data before proceeding with the analysis. The following data cleaning tasks are typically required.

Ensure that the timestamps match between datasets (e.g. for concurrent kW and temperature datasets), and that any gaps in the data which are not representative of typical operation have been addressed by interpolation or other means. Interpolated or derived data shall be flagged, and the method used to fill in data gaps shall be described.

Note that in preparing the data for use in the 8760 analysis, there will likely be blocks of time during the metering period that will be analyzed differently. For example, during regular business hours, a load may

---

<sup>763</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Section 11, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

<sup>764</sup> PJM Manual 18B: Energy Efficiency Measurement and Verification, Rev. 0, Effective date: April 23, 2009; PJM M&V Manual approved 4\_09.pdf

<sup>765</sup> RLW Analytics, Review of ISO New England Measurement and Verification Equipment Requirements, Final Report, April 24, 2008 Prepared for: Northeast Energy Efficiency Partnerships’ Evaluation and State Program Working Group; RLW Metering Report.pdf

be temperature dependent, and the data will be analyzed using a regression analysis of kW vs. outdoor air temperature, whereas the same piece of equipment on the weekend may have a constant standby load, and is thus schedule driven and non-temperature dependent on the weekends. Different blocks of the 8760 hours in a year will be populated from the separate analyses of the distinct blocks of meter data.

### **Annualization and Analysis Approach**

The recommended approach to annualization of meter data and savings calculations is an 8760 analysis<sup>766</sup>. This approach inherently captures seasonality and peak period variability on an hourly basis and is therefore more accurate than other traditional methods such as binned analysis.

Typical approaches to analyzing custom measures include:

- Demand vs. temperature analysis for temperature dependent measures.
- Daily operating profiles for schedule-driven measures
- Cyclical production profiles for production-related measures

These methods should address part load performance, and may employ different metrics such as:

- Demand vs. percent capacity
- Demand/Ton vs. percent capacity
- Demand vs. hours
- Demand per ton, pound, cubic foot or quantity

### **Calculations**

Clearly document all calculations. Indicate how the meter data is used in the analysis and why this is appropriate for the measure. Meter data used in the analysis shall be clearly distinguished from data not used in the analysis.

Computer simulation of energy efficiency measures based on meter data using 8760 hourly simulation models such as eQuest, or customized spreadsheet analysis or other energy analysis tools can be employed to calculate energy savings. The algorithms of the modeling software must be designed to address the custom measure. Minimum documentation requirements include model output reports stating unmet load hours for the baseline and efficient case, hourly energy use and demand, and electronic copies of the model or spreadsheet analysis files.

Annual kWh and therms for baseline and efficient cases shall be the annualized and normalized per the equations in Section 2 using the methods described above. Coincident Electrical Demand (kW) for baseline and efficient cases shall be calculated from meter data as the average kW over the *Performance Hours* as indicated in Section 2. Calculation documentation shall include definitions and reference sources for all variables and assumed factors in Section 3.

### **Documentation**

Analysis shall be documented with comprehensive, well labeled supporting information including, but not limited to:

Manufacturer literature documenting connected load for both the baseline and the installed equipment or manufacturer data documenting the information necessary to calculate peak demand (such as horsepower, voltage, efficiency, etc.). Manufacturer data shall be clearly marked to indicate the specific equipment model number and data that is applicable to the project and used in the calculations.

---

<sup>766</sup> Patil, Yogesh, et. al. (Aug, 2009) "Taking Engineering Savings to the Next Level, presented at IEPEC 2009; <http://www.ers-inc.com/images/articles/Papers/takingsavingstonextlevel.pdf>

Where citing nameplate ratings in the analysis, provide a single photograph of the nameplate clearly showing the cited information and identifying the specific equipment to which the name plate information is applicable.

Manufacturer data shall be adjusted to reflect actual site operating conditions. Document calculation of the adjusted connected load reflecting metered on site conditions.

## **Reporting**

The following metrics and details shall be reported:

- All information required in this protocol
- M&V Plan/Analysis Template
- Regression  $R^2$  values for fits of demand vs. proxy variables.
- Cleaned meter data (raw data shall be included as an appendix) clearly indicating which data was used in the savings analysis
- Discussion of approach to anomalies, outliers, interpolations and extrapolations in the analysis
- Assessment of the level of uncertainty associated with the energy and demand calculated savings.
- Project commissioning can reduce energy use and is recommended. If the project was commissioned, submit a copy of the commissioning report.

## C&I New Construction – Custom Measure Analysis Protocol

This protocol defines the requirements for analyzing and documenting commercial and industrial energy efficiency measures. It applies to custom measures filed under Utility Programs and those prepared for Mercantile Customers. This protocol addresses new construction projects that are not covered by other analysis methodologies in the TRM. A new construction project is defined as a new building, major renovation and/or an addition as defined in the applicable building codes.

This protocol is intended to address the energy impacts of the incremental energy efficiency improvements over what would have been built as per applicable state and local codes. Projects that include duplex, redundant and/or spare equipment shall calculate the energy savings based only on the operating equipment and systems.

This analysis protocol is supplemented by a glossary and an Analysis Template (Appendix B). Words used herein that are defined in the glossary are in italics. The Analysis Template is a tool that can guide applicants in preparing and presenting the documentation to support custom new construction energy efficiency measure savings estimates.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Project Savings

Section 3: Project Variables

Section 4: Documentation and Modeling

### Section 1: Project Information

#### Project Title

Provide a unique title for the project so that it is easily distinguishable from other projects prepared by the same customer and from projects with similar scope. Example: Company XYZ Building A – New Compressed Air System Installation.

#### Customer Name

Provide the name of the company undertaking the energy efficiency improvements.

#### Customer Contact

Provide the contact information including name, title, mailing address, phone, and email for the primary customer contact on this project.

#### Site (Location)

Provide the full address of the site at which the project is being implemented. If the customer has an additional business location that is involved with the project, include additional customer site information as needed.

#### Sector/Industry Description and NAICS Code

Describe the sector and industry in which the custom measure is being applied. Sectors include: Industrial, Commercial, Institutional, and Multi-family. Industry should specify the end use for commercial and institutional projects (e.g. office, restaurant, dormitory) and the specific industry for manufacturing projects<sup>767</sup>.

#### Utility(ies) Information

The name of the affected utility(ies) serving the customer. Provide all relevant account and meter information for electric and gas accounts and meters affected by the project.

#### Program

Identify the program under which this project will be submitted and why the project falls under the program.

Projects submitted under existing utility programs should identify the program under which the project application

---

<sup>767</sup> 2007 NAICS; North American Industry Classification System; <http://www.census.gov/cgi-bin/sssd/naics/naicsrch?chart=2007>



will be filed and the utility-specific identifier for the project. Projects being submitted under the Mercantile Program should so indicate.

#### **Project/Technology Description**

Describe the energy using equipment and systems affected by the project in lay terms. Include specific information regarding industrial process technologies.

#### **Project Implementation Schedule**

Define the implementation schedule for the project, including start and completion dates.

#### **Measures Included in the Project**

All energy efficiency measures included in the project shall be clearly identified and savings calculations and estimates shall be clearly documented for each measure in accordance with this protocol.

#### **Affected Energy Sources (Electric, Gas, Other)**

Identify all affected energy sources (electric, gas, propane, oil, solar, etc.) for the project, provide a brief description of how the source energy use is affected and quantify the impacts in the analysis.

#### **Analysis Firm(s) and Contact(s)**

Provide information regarding the firm performing the engineering analysis of the custom project. Provide the name(s) of the contacts for the firm(s) and contact information including company name, individual(s) name, address, phone, and email.

## **Section 2: Energy Consumption and Demand**

This section defines the requirements for calculating baseline and efficient case energy consumption and demand, as well as the method for calculating savings. Calculations shall address all project variables in accordance with the requirements of Section 3 and undertake the analysis in accordance with the documentation and modeling requirements in Section 4.

The equations used in this protocol assume that the project has a single measure. If the project has multiple measures, these calculations shall be repeated for each measure in such a way as to capture interactive effects.

This protocol is designed to address the whole building analysis of a new construction project. Modeling shall use an 8760 model which meets the requirements of ASHRAE 90.1 Appendix G as described in Section 4.

### **Efficient Case**

#### **Efficient Technology Description and Documentation**

Describe the measures, technologies and controls and how they are designed to optimize building energy performance. Document the relevant efficiency code that applies to the building and any additional federal/state/local standards that may apply to proposed efficient equipment that is not addressed in the code.

#### **Efficient Case Annual Energy Use**

Calculate the annual energy use for the proposed equipment using the methodologies outlined in this protocol and all referenced and applicable standards.

The total efficient energy use shall be calculated separately for each type of *energy source* (e.g. electric and gas) according to the following equations.

For loads calculated from a regression analysis (e.g. kW vs. Temperature as described in Section 4) the following equation shall be used:

$$ENERGY_{eff} = \sum_{j=1}^m (E\text{ LOAD}_{j,eff} \times HOURS_{j,eff})$$

Where

<b>ENERGY<sub>eff</sub></b> ≡	Annual Efficient Energy Use - Annual Energy Use with the efficiency improvement installed, calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>E LOAD<sub>j,eff</sub></b> ≡	Efficient Load (electric kW, gas therms) - Efficient Load for each system and subsystem with operating condition <i>j</i> (as defined below). For example, Efficient Load will need to be calculated differently for staged condenser fans that have different operating hours or multiple pumps that operate at varying speeds.
<b>HOURS<sub>j,eff</sub></b> ≡	Total Annual Operating – Total Annual Operating Hours for each system and subsystem with operating condition <i>j</i> (as defined below).

For loads calculated based on full load or on equipment specifications:

$$ENERGY_{eff} = \sum_{j=1}^m (FULL\text{ LOAD}_{j,eff} \times LF_{j,eff} \times HOURS_{j,eff})$$

where

<b>ENERGY<sub>eff</sub></b> ≡	Annual Efficient Energy Use - Annual Energy Use with the efficiency improvement installed, calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>FULL LOAD<sub>j,eff</sub></b> ≡	Efficient Full Load - the maximum operating load of each efficient system and subsystem with operating condition <i>j</i> (as defined below).
<b>LF<sub>j,eff</sub></b> ≡	Load Factor - fraction of Full Load for each efficient system and subsystem with operating condition <i>j</i> (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.
<b>HOURS<sub>j,eff</sub></b> ≡	Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition <i>j</i> (as defined below).
<b>j</b> ≡	System Condition - refers to each distinct combination of system mode, number of hours, full load demand, and load factor for each system or subsystem.
<b>m</b> ≡	Number of Terms – total Number of Terms needed to cover all conditions of affected systems and subsystems.

Document the inputs and outputs to the building model as described in the LEED Reference Guide for Green Building Design and Construction, Energy and Atmosphere Credit One, Option 1, Whole Building Simulation and as described in Section 4.

#### Efficient Case Coincident Electric Demand (kW)

Document the efficient case coincident electric demand for each measure according to one of the following equations:

For variable loads:

$$C\text{ LOAD}_{eff} = \text{AVG PH LOAD}_{eff}$$

Where

**AVG PH LOAD<sub>eff</sub>** ≡ Average Efficient Load of all affected equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours* and is equal to total energy use during the *Performance Hours* divided by the total *Performance Hours*.

For constant loads:

$$C\text{ LOAD}_{eff} = \sum_{k=1}^n (\text{FULL LOAD}_{k,eff} \times LF_{k,eff} \times CF_{k,eff})$$

where

**C LOAD<sub>eff</sub>** ≡ Average Coincident Efficient Load – Average Coincident Load of all affected efficient equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours*.

**FULL LOAD<sub>k,eff</sub>** ≡ Efficient Full Load - the maximum operating load of each efficient system and subsystem operating during the *Performance Hours* with operating condition *k* (as defined below), exclusive of non operating time.

**LF<sub>k,eff</sub>** ≡ Load Factor - fraction of Full Load for each efficient system and subsystem with operating condition *k* (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.

**CF<sub>k,eff</sub>** ≡ *Coincidence Factor* - the Coincidence Factor is the fraction of time that each efficient system and subsystem is operating during the *Performance Hours* for operating condition *k* (as defined below). The three typical conditions for CF are as follows: CF is unity if the equipment is continuously on during the *Performance Hours*; CF is zero for each system or subsystem that is not operating during the *Performance Hours*; otherwise, CF is the ratio of the 'on' time to the total number of performance hours.

**k** ≡ System Condition - refers to each distinct combination of the system mode (e.g. high speed, low speed), Full Load demand, and Load Factor for each system or subsystem operating during the *Performance Hours*.

**n** ≡ Number of Terms – total Number of Terms needed to cover all operating modes of affected systems and subsystems during *Performance Hours*.

The analysis shall take into account that not all system components are expected to operate during all of the *Performance Hours*. For example on a cooling tower some of the cooling tower fans could periodically be staged in the “off” position while the compressors could be operating at 100% load. In these cases the system load during *Performance Hours* will not equal the sum of the loads for all system components.

Document the modeled measure inputs and outputs specifically for the *Performance Hours*.

The analysis shall include documentation of how the load varies during the *Performance Hours*. For constant load equipment, the analysis shall be based on the equipment load and operating schedule during the performance hours. For variable load equipment, the analysis shall address variations in equipment load and operating schedule during the *Performance Hours*.

Additional analysis will typically be prepared to address the impact of the energy efficiency measure on customer peak demand. Such analysis is critical to calculating customer cost savings, but should not be confused with the required calculation of the Coincident Demand during the *Performance Hours*.

## Baseline Case

### Baseline Technology Methodology and Description

Baseline for new construction projects is the equipment meeting the level of efficiency required by State Code<sup>768</sup>, in place at the time of installation. Document any additional Federal or industry standards<sup>769</sup> that may apply to proposed efficient equipment that is not addressed in the code. The baseline description shall detail information regarding the mandated minimum efficiencies used in developing the code compliant building model at the component level.

### Baseline Case Annual Energy Use

Calculate the annual energy use for the baseline equipment and systems using the methodologies outlined in this protocol and all referenced and applicable standards.

The total baseline energy use shall be calculated separately for each *energy source* (e.g. electric and gas) according to the following equations.

For loads calculated from a regression analysis (e.g. kW vs. Temperature as described in Section 4) the following equation shall be used:

$$ENERGY_{base} = \sum_{j=1}^n (E\,LOAD_{j,base} \times HOURS_{j,base})$$

where

<b><math>ENERGY_{base}</math></b> ≡	Annual Baseline Energy Use - Annual Energy Use for baseline equipment calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b><math>E\,LOAD_{j,base}</math></b> ≡	Baseline Load (electric kW, gas therms) - Baseline Load for each system and subsystem with operating condition <i>j</i> (as defined below). For example, Baseline Load will need to be calculated differently for staged condenser fans that have different operating hours or multiple pumps that operate at varying speeds.
<b><math>HOURS_{j,base}</math></b> ≡	Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition <i>j</i> (as defined below).

For loads calculations based on equipment specifications:

<sup>768</sup> International Code Council, 2007 Ohio Building Code;  
<http://publicecodes.citation.com/st/oh/st/b2v07/index.htm?bu2=undefined>

$$ENERGY_{base} = \sum_{j=1}^m (FULL\ LOAD_{j,base} \times LF_{j,base} \times HOURS_{j,base})$$

where

<b>ENERGY<sub>base</sub></b> ≡	Annual Baseline Energy Use - Annual Energy Use for baseline equipment calculated separately for each measure and each <i>energy source</i> (electric, gas).
<b>FULL LOAD<sub>j,base</sub></b> ≡	Baseline Full Load - the maximum operating load of each baseline system and subsystem with operating condition <i>j</i> (as defined below).
<b>LF<sub>j,base</sub></b> ≡	Load Factor - fraction of Full Load for each baseline system and subsystem with operating condition <i>j</i> (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.
<b>HOURS<sub>j,base</sub></b> ≡	Total Annual Operating Hours – Total Annual Operating Hours for each system and subsystem with operating condition <i>j</i> (as defined below).
<b><i>j</i></b> ≡	System Condition - refers to each distinct combination of system mode, number of hours, Full Load demand, and Load Factor for each system or subsystem.
<b><i>m</i></b> ≡	Number of Terms – total Number of Terms needed to cover all conditions of affected systems and subsystems.

Document the inputs and outputs to the building model as described in the LEED Reference Guide for Green Building Design and Construction, Energy and Atmosphere Credit One, Option 1, Whole Building Simulation and as described in Section 4.

#### Baseline Case Coincident Electric Demand (kW)

Document the baseline case coincident electric demand for each measure according to one of the following equations:

For variable loads:

$$C\ LOAD_{base} = AVG\ PH\ LOAD_{base}$$

Where

**AVG PH LOAD<sub>base</sub>** ≡ Average Baseline Load of all affected equipment during the *Performance Hours* of 3-6 pm, weekday, non-holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours* and is equal to total energy use during the *Performance Hours* divided by the total *Performance Hours*.

For constant loads:

$$C\ LOAD_{base} = \sum_{k=1}^n (FULL\ LOAD_{k,base} \times LF_{k,base} \times CF_{k,base})$$

where

**C LOAD<sub>base</sub>** ≡ Average Coincident Baseline Load – average coincident load of all affected baseline equipment during the *Performance Hours* of 3-6 pm, weekday, non-

holidays from June 1 – August 31 for a total of 195 hours. Includes non-operating time during the *Performance Hours*.

<b><math>FULL\ LOAD_{k,base}</math></b> $\equiv$	Baseline Full Load - the maximum nameplate load of each baseline system and subsystem in operation during the <i>Performance Hours</i> with operating condition $k$ (as defined below), exclusive of non operating time.
<b><math>LF_{k,base}</math></b> $\equiv$	Load Factor - fraction of Full Load for each baseline system and subsystem with operating condition $k$ (as defined below). Typically less than 1.00 unless the equipment was sized to run at 100% of rated capacity.
<b><math>CF_{k,base}</math></b> $\equiv$	<i>Coincidence Factor</i> - the Coincidence Factor is the fraction of time that each baseline system and subsystem is operating during the <i>Performance Hours</i> for operating condition $k$ (as defined below). The three typical conditions for CF are as follows: CF is unity if the equipment is continuously on during the <i>Performance Hours</i> ; CF is zero for each system or subsystem that is not operating during the <i>Performance Hours</i> ; otherwise, CF is the ratio of the 'on' time to the total number of performance hours.
<b><math>k</math></b> $\equiv$	System Condition - refers to each distinct combination of the system mode (e.g. high speed, low speed), Full Load demand, and Load Factor for each system or subsystem operating during <i>Performance Hours</i> .
<b><math>n</math></b> $\equiv$	Number of Terms – total Number of Terms needed to cover all operating modes of affected systems and subsystems during <i>Performance Hours</i> .

The analysis shall take into account that not all system components are expected to operate during all of the *Performance Hours*. For example on a cooling tower some of the cooling tower fans could periodically be staged in the “off” position while the compressors could be operating at 100% load. In these cases the system load during *Performance Hours* will not equal the sum of the loads for all system components.

Document the modeled measure inputs and outputs specifically for the *Performance Hours*.

The analysis shall include documentation of how the load varies during the *Performance Hours*. For constant load equipment, the analysis shall be based on the equipment load and operating schedule during the *Performance Hours*. For variable load equipment, the analysis shall address variations in equipment load and operating schedule during the *Performance Hours*.

Additional analysis will typically be prepared to address the impact of the baseline equipment on customer peak demand. Such analysis is critical to calculating customer cost savings but should not be confused with the required calculation of the coincident demand during the *Performance Hours*.

### Savings

Savings shall be calculated from the efficient case and baseline case energy and demand calculations from above via whole building modeling. Ensure that the model addresses project variables as described in Section 3. Whole building models are designed to address interactive effects; the analyst shall ensure that the model accurately addresses such effects.

**Annual Energy Savings (kWh for electrical, therms for gas)**

$$ENERGY_{saved} = ENERGY_{base} - ENERGY_{eff}$$

where

**ENERGY<sub>base</sub>** and **ENERGY<sub>eff</sub>** are defined above.

Coincident Electrical Demand Reduction (kW) =

$$C\text{ LOAD}_{\text{saved}} = C\text{ LOAD}_{\text{base}} - C\text{ LOAD}_{\text{eff}}$$

where

**C LOAD<sub>base</sub>** and **C LOAD<sub>eff</sub>** are defined above.

### Section 3: Project Variables

Accurately capturing and documenting the variables that affect annual energy use and savings as well as those affecting peak period demand coincidence are critical elements in developing meaningful and reliable energy savings estimates. The savings analysis shall consider and address the variables over the life of the measure for both the baseline and efficient case. Uncertainty in variables shall be quantified and the savings analysis shall clearly demonstrate transparency and reasonableness in definition and application of variables affecting energy savings<sup>770</sup>.

The variables below are common to many custom energy analyses. Document the variables that affect the energy use of the project for both the baseline and efficient scenarios. Describe the modeling methods used and any uncertainty associated with the values used in the model. **ALL** savings calculations must be *normalized* to reflect consistent application of the assumed variables for the project under both baseline and post-installation conditions over the full range of operating conditions for the affected systems. Modeling for new construction projects is the expected method for accounting for these variables as described in Section 4.

#### Load Characterization

Accurate characterization of the baseline and efficient energy use involves a comprehensive analysis of all variables that affect the loads over the analysis period. Concepts that are commonly used in performing energy analysis are discussed below. In all cases it is the intent of this document to require that the variations in load due to all factors (weather, production, schedule, etc) are accounted for in the analysis.

##### Load Shape

The load shape reflects variations in load over the course of a year, with specific attention paid to the peak periods defined by the affected utility and/or regional transmission organization. The model shall generate an 8760 load shape<sup>771</sup> that captures the expected period at which the load will operate at full load (full load hours) as well as all part load and non-operating or standby-modes..

##### Load Factor

Load Factor is the ratio of maximum energy demand to the average electric demand for the affected end use. Analysis of loads across a representative sample of operating conditions can generate a single load factor for constant load applications. For variable load applications, a series of load factors must be developed to accurately represent the variations in energy use under the variety of loading conditions that occur over the range of operating cycles in a typical calendar year. Variable load analysis shall address the variations in load factor over a one year period for all dependent variables.

##### Peak Load Factor

Peak Load Factor describes the variation between the maximum connected load of the equipment and the highest actual load of the equipment. In some cases the Peak Load Factor is unity. For oversized

---

<sup>770</sup> Anne Arquit Niederberger, PhD, A+B International (2005), Baseline Methodologies for Industrial End-Use Efficiency Presentation. Presented at World Bank; Anne\_Arquit\_Niederberger\_Industry\_EE\_CDM\_Dec\_05.xls

<sup>771</sup> Patil, Yogesh, et. al. (Aug, 2009) "Taking Engineering Savings to the Next Level, presented at IEPEC 2009 <http://www.ers-inc.com/images/articles/Papers/takingsavingstonextlevel.pdf>

equipment it is frequently less than one. In some rare instances where equipment is operated above its rated load, the Peak Load Factor may be greater than one.

### **Coincidence Factor**

Coincidence Factor is the coincidence of the demand savings during the *Peak Performance Hours*. For modeled measures, the average coincident demand, including non-operational hours, is generated through the hourly simulation of building demand for the baseline and efficient conditions during *Peak Performance Hours*.

### **Operating Conditions**

Characterize all variable operating conditions that affect the load over the analysis period. Typical operating variables are outlined below. Additional factors may be required to accurately characterize variability in equipment operations and the energy savings resulting from energy efficiency measures over the full range of operating conditions.

#### **Operating Hours**

Establish the projected operating hours for all affected equipment in the building – scheduled operating hours are the same for base and efficient case models except where necessary to model nonstandard efficiency measures<sup>772</sup>. Address all variations in operating schedule over an annual operating cycle including, but not limited to weekends, holidays, and shift or occupancy changes that are a result in cyclical changes in operations over the course of a year. (For example retail applications may have longer operating hours in November and December). Project analysis shall clearly identify all operating, non-operating, and standby hours, the related loads, the periods for which those conditions apply and the basis for the assumptions in the analysis. Special attention should be paid that the hours of *Coincident Peak* (3:00 – 6:00 weekdays from June 1 through August 31) are detailed.

#### **Weather**

The analysis shall address the impact of annual weather, including temperature, humidity, and solar incidence (where applicable) on energy consumption. All savings (energy and demand) should be normalized to the TMY3 (Typical Meteorological Year) that corresponds to the nearest TMY3 weather site using modeling and/or regression analysis. TMY3 data should be obtained from National Renewable Energy Laboratory (NREL<sup>773</sup>) and used as the 8760 weather file to model and/or normalize annual energy use for weather dependent measures. Modeling tools, such as eQuest<sup>774</sup>, currently use TMY2 data. TMY3 data is based on more-recent and more accurate data and is available for many more locations; TMY3 data is available for over 1,000 locations, where TMY2 data is available for fewer than 300 locations.

#### **Production**

This applies only to industrial new construction projects that include production measures. Project analysis shall reflect variations in production over the cycles within the analysis period. Variations can include such things as the number of shifts or changes in quantity or type of product manufactured.

For industrial process measures, production documentation shall normalize energy use based on the energy intensity of the process (i.e. energy use per unit of output) over the lifetime of the measure for both the baseline and efficient cases. Measurement of output should be based on physical measures of output (i.e. ton of steel or paper) and capture variations in both production levels and manufactured product types over the analysis period for both the baseline and efficient case<sup>775</sup>.

Assumptions regarding economic climate, changes in production levels, and shifts all affect calculated energy savings over the life of the measures. Develop reasonable assumptions regarding these variables

---

<sup>772</sup> ASHRAE Standard 90.1-2007 Energy Standard for Buildings Except Low-Rise Residential Buildings, Appendix G, Table G3.1, Section 4.

<sup>773</sup> Typical Meteorological Data (TMY3) - [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/)

<sup>774</sup> DOE2 eQuest simulation software - <http://www.doe2.com/equest/>

<sup>9</sup> Ruth, Michael, Lawrence Berkeley National Laboratory, et. al. (2001) A Process-Step Benchmarking Approach to Energy Use at Industrial Facilities: Examples from the Iron and Steel and Cement Industries; Process\_Step\_Benchmarking\_ACEEE\_LBNL-50444.doc



and ensure the application of these variables is clearly identified in both the analysis and project documentation. Identify the uncertainty introduced into the energy savings estimates as a result of these assumptions.

### **Controls**

Control settings and level of control shall be accounted for in the analysis in accordance with ASHRAE Standard 90.1 2007, Appendix G. Clearly document the control points that affect energy use, the control setpoints, sequence of operation and accuracy of controls that are required for the baseline case in Appendix G. Clearly document the changes in these conditions for the efficient case and how they are modeled. Include relevant information such as commissioning of control points, potential manual overrides of control sequences and anticipated control point calibration over the life of the measure.

### **Occupancy**

Where occupancy affects energy use and varies over time, capture the variations in occupancy and their effects over the analysis period. At a minimum there is typically an 'occupied' and an 'unoccupied' mode for most facilities.

Assumptions regarding economic climate and shifts in hours of occupancy affect calculated energy savings over the life of the measures. Develop reasonable assumptions regarding these variables and ensure the application of these variables is clearly identified in both the analysis and project documentation. Identify the uncertainty introduced into the energy savings estimates as a result of these assumptions.

### **Interactive Effects**

Analysis shall explicitly account for interactive effects between measures. For projects that include both prescriptive and custom measures, account for the energy use reduction from the prescriptive measure in the custom measure analysis. As prescriptive measures include interactive effects themselves, document the methodology that is used to ensure that savings from the interactive effects are only accounted for once in the claimed savings.

One common set of interactive effects is the impact of electrical energy efficiency measures within a facility on that facility's heating and/or cooling load. These shall be addressed as follows:

#### **Waste Heat**

For efficiency upgrades that reduce the rejection of waste heat into air conditioned spaces (i.e. evaporator fans in a refrigerated enclosure), quantify the reduction in heat rejection<sup>776</sup> and the associated cooling reduction.

#### **Heating Increase**

For efficiency upgrades that reduce the rejection of waste heat into heated spaces, quantify the additional heating fuel required to offset the change and maintain temperature within the space<sup>14</sup>. The analysis shall address heating system efficiency and include basis for assumptions regarding fossil fuel increases.

For projects with multiple measures, the procedure for interactive effects is to calculate savings for the longest lived measure first, then consider that measure's impact on the next longest-lived measure, and so on. This is because a short-lived measure can affect savings from a long-lived measure, but only for part of its life. Since tracking system limitations require that annual measure savings remain constant for all years, this is the only way to ensure proper lifetime savings and total resource benefits are captured.

### **Measure Life**

Document both the life of the baseline and efficient case equipment. The efficient case analysis is typically performed over the lifetime of the efficiency measures. Where the analysis period and the efficiency measure life are not the same, describe the rationale for the analysis period and assumptions regarding replacement equipment for measures with lives that are shorter than the analysis period.

---

<sup>776</sup> 2009 ASHRAE Handbook, Fundamentals, Chapter 18, page 18.3.

**Persistence**

Persistence factors may be used to reduce lifetime measure savings in recognition that initial engineering estimates of annual savings may not persist long term<sup>777</sup>. The persistence factor accounts for uncertainties and for normal operations over the life of the measure. For instance if energy efficient motors are installed as part of a process and the customer's standard procedure is to have motors rewound upon failure, the energy efficiency associated with the efficient motor would only persist until the expected time when the motor is rewound. Persistence is also affected by measures being removed or failing prior to the end of its normal engineering lifetime, improper maintained over the life of the measure, control overrides or loss of calibration (controls only), etc.

**Related Variables:**

Related variables are those which are not included in the energy and demand calculations, but may be required for project cost-effectiveness screening by the utility(ies). Document the following variables for the project:

**Operation & Maintenance (O&M) Impacts**

Where O&M practices would have resulted in changes to the baseline during the analysis period, account for such practices in the establishment of baseline and efficiency case energy use.

**Water Consumption Impacts**

Quantify any changes in water consumption attributable to the project.

**Cost**

Document the cost of each measure. Include invoices, bids and other documentation to substantiate project cost data. Identify portions of the cost which are for equipment being purchased for redundancy or backup and will not generate savings in the project. Related costs such as the costs for audits, design, engineering, permits, fees or M&V should be reported separately from the costs associated with the design and installation of energy efficiency improvements.

**Other Variables**

As needed - clearly document all variables affecting the energy use of the project that have not been covered in this document.

**Section 4: Documentation and Modeling**

Documentation and modeling of custom new construction projects are essential to developing reliable energy savings and peak demand reductions claims.<sup>778</sup> The following guidelines support the accurate estimation of energy and demand savings.

**Modeling**

Computer modeling is an acceptable method of analysis using an 8760 model which meets the requirements of ASHRAE 90.1 Appendix G and the requirements of the LEED Reference Guide for Green Building Design and Construction, Energy and Atmosphere Credit One, Option 1, Whole Building Simulation.

Process measures, such as industrial process or data center efficiency that are additional to the building design modeled under ASHRAE 90.1 Appendix G shall be either included in the simulation using customized algorithms, or modeled separately using measure specific analysis tools. The results of measure specific analysis shall be accounted for in the building model and any custom simulations should be documented in accordance with the TRM and the Custom Analysis Template (Appendix B).

**Calculations**

Computer simulation of energy efficiency measures using 8760 hourly simulation models such as eQuest, or customized spreadsheet analysis or other energy analysis tools shall be employed to calculate energy savings. The

---

<sup>777</sup> Efficiency Vermont Technical Reference User Manual (TRM) Measure Savings Algorithms and Cost Assumptions, February 19, 2010

<sup>778</sup> Parlin, Kathryn, et. al. (August, 2009 IEPEC) "Demand Reduction in the Forward Capacity Market, Verifying the Efficiency Power Plant"

algorithms of the modeling software must be designed to address the modeled measures. Minimum documentation requirements include model output reports stating unmet load hours for the baseline and efficient case, hourly energy use and demand, and electronic copies of the model or spreadsheet analysis files.

Annual kWh and therms for baseline and efficient cases shall be the *annualized* and *normalized* per the equations in Section 2 using the methods described above. Document the assumptions and calculations for baseline and efficient Coincident Electric Demand (kW) as the average kW over the *Performance Hours* as indicated in Section 2. Calculation documentation shall include definitions and reference sources for all variables and assumed factors in Section 3.

### **Documentation**

Analysis shall be documented with comprehensive, well labeled supporting information including, but not limited to:

Manufacturer literature documenting connected load for both the baseline and the installed equipment or manufacturer data documenting the information necessary to calculate peak demand (such as horsepower, voltage, efficiency, etc.) shall be included in the project documentation. Manufacturer data shall be clearly marked to indicate the specific equipment model number and data that is applicable to the project and used in the calculations.

### **Reporting**

The following shall be reported:

- All information required in this protocol
- Custom Analysis Template (Appendix B) Section 1 and Documentation Worksheet (Appendix C) only
- Documentation as required by LEED Reference Guide for Green Building Design and Construction, Energy and Atmosphere Credit One, Option 1, Whole Building Simulation.
- Assessment of the level of uncertainty associated with the energy and demand calculated savings.
- Project commissioning can reduce energy use and is recommended. If the project was commissioned, submit a copy of the commissioning report.

## **V. Protocols for Transmission & Distribution Projects**

### **T&D Loss Reductions – Mass Plant Replacement and Expansion Analysis Protocol**

This protocol defines the requirements for analyzing and documenting loss reductions due to installation of mass utility plant with lower losses than standard equipment, when that equipment is required due to failure, need for increased capacity, or connection of new loads. Where equipment is replaced prior to the end of its rated service life in order to achieve energy savings, the project is classified as Retrofit and the “T&D Loss Reductions – Mass Plant Retrofit Analysis Protocol” should be used to guide analysis.

Examples of mass plant include line transformers, secondary lines, service drops, and meters. For these common and generally small investments, determination of loads and losses for each installation will not generally be feasible or cost-effective. This protocol is intended to address the energy impacts of operating energy efficiency improvements of installed equipment on average over many installations.

This analysis protocol does not apply to equipment installed to serve interval-metered load in excess of 500 kVA. Those projects should be analyzed with the Large Customer Connection Analysis Protocol.

The Analysis Protocol is divided into four sections:

Section 1: Program Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

#### **Section 1: Program Information**

##### **Program Title**

Provide a unique title for the program so that it is easily distinguishable from other programs with similar scope.

Example: “50 kVA 13.8 kV transformers specified for new connections”.

##### **Sites (locations)**

Provide a list of the locations at which equipment was installed under this program. Locations may be identified by the customer addresses, pole numbers, transformer identification numbers, or similar identifiers.

##### **Class/Sector/Industry Description**

For each installation, specify the customer classes (residential, small general service, etc.) served by the equipment, and for non-residential customers, the sector (Industrial, Commercial, Institutional, Multi-family) and type of use (e.g., office, restaurant, dormitory, gas station).

##### **Technology Description**

Describe the type of equipment affected (e.g., line transformer, secondary, etc.), including the range of capacities, wire sizes, span lengths, or other descriptors affecting energy losses.

Describe the base-efficiency equipment that would be installed under current standard utility practice.

Describe the high-efficiency equipment installed in the program. Provide specific details (e.g., wire sizes, transformer loss specifications) relevant to loss computations.

##### **Program Implementation schedule**

Define the implementation schedule for the program, including number of installations by month.

##### **Analysis Contact(s)**

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

## Section 2: Equipment Loading

For each type of equipment included in the program, provide (1) the estimated maximum load on the typical or average installation, (2) the estimated average load on the equipment on weekdays between 3:00 p.m. and 6:00 p.m., June through August (the coincident peak period), and (3) the estimated load-duration curve on the equipment.

Include the sources of the estimates, including utility load-research data.

Include any data on the variability of loads among installations, reflecting the number of customers served by the equipment (e.g., customers on a transformer or a span of secondary), the size of customer, and the customer class(es) (e.g., residential, street lighting, small commercial) served.

The load data should reflect the conditions prevailing in the year for which savings are claimed. Particularly for expansions of the distribution system, the loads in the year of installation may be less than loads in later years.

Where possible, the annual billed sales to the customers served by the equipment should be used as a check on the total energy usage assumed. Where these data are not available, describe the system configuration (e.g., secondary network) or database limitations that prevent such comparison.

## Section 3: Base and Efficient Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

### Baseline-Case Losses

For each type of equipment included in the program, compute the annual losses per unit of equipment as

$$\text{loss}_{\text{base}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_b + 8766 \times \text{NLL}_b$$

where

t = hour  
FLC = full-load capacity  
FLLL<sub>b</sub> = load losses at full load  
NLL<sub>b</sub> = no-load loss/hour

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{base}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_b\} \div H + \text{NLL}_b$$

where

h = hour in the coincident peak period  
H = number of hours in the coincident peak period

Provide manufacturer's specifications or standard-reference data for typical baseline equipment for FLC, FLLL, and NLL.

Provide the spreadsheet in which the base losses are computed.

Provide information demonstrating that the assumed base efficiency is in fact standard practice, including:

Current Industry Practice – Document current industry practice using articles from industry journals, manufacturers' sales data, recent distribution standards from other utilities, and/or similar sources.

Applicant Practice – Document the utility’s own recent standard practices through purchase records, distribution standards, internal guidelines for linemen, and similar documents. Document the effect on equipment selection of allowances for growth, including new infill construction in expansion applications.

### Efficient-Case Losses

For each type of equipment included in the program, compute the annual losses per unit of the efficient equipment as

$$\text{loss}_{\text{efficient}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_e + 8766 \times \text{NLL}_e$$

where

t = hour  
 FLC = full-load capacity  
 FLLL<sub>e</sub> = load losses at full load  
 NLL<sub>e</sub> = no-load loss/hour

Compute the post-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{efficient}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_e\} \div H + \text{NLL}_e$$

where

h = hour in the coincident peak period  
 H = number of hours in the coincident peak period

Provide manufacturer’s specifications or standard-reference data for efficient equipment for FLC, FLLL, and NLL.

Provide the spreadsheet in which the efficient-case losses are computed.

### Savings

$$\text{Energy Savings} = (\text{loss}_{\text{base}} - \text{loss}_{\text{efficient}}) \times (1 + \text{ULF})$$

where

ULF = Upstream Loss Factor, the change in losses on the primary distribution and transmission systems per kWh reduction in secondary losses

$$\text{Peak Savings} = (\text{peakloss}_{\text{base}} - \text{peakloss}_{\text{efficient}}) \times (1 + \text{UPLF})$$

where

ULF = Upstream Peak Loss Factor applicable to the coincident peak period

If the utility has estimates of load-related losses on the primary distribution and transmission systems, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to efficiency improvements in mass plant on the secondary distribution system. Provide the derivation of the estimate of primary and transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

## Section 4: Screening Inputs

### Measure Life

Document the life of each type of added equipment, including reference to the utility’s depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components. Where some equipment has a useful life shorter than the analysis period, describe the rationale for the analysis period and assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Discount savings with respect to existing equipment over time, to the extent that the utility would make this (or a similar) change in configuration in the foreseeable future to meet peak load or reliability requirements.

**O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the changes in equipment and to any changes in operating practices.

**Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## **T&D Loss Reductions – Mass Plant Retrofit Analysis Protocol**

This protocol defines the requirements for analyzing and documenting loss reductions due to replacement of existing mass utility plant with more efficient equipment, prior to the end of the existing equipment's useful life and in the absence of any need for increased capacity.

Examples of mass plant include line transformers, secondary lines, service drops and meters. For these common and generally small investments, determination of loads and losses for each installation will not generally be feasible or cost-effective. This protocol is intended to address the energy impacts of operating energy efficiency improvements of installed equipment on average over many installations.

This analysis protocol does not apply to equipment installed to serve interval-metered load in excess of 500 kVA. Those projects should be analyzed with the Large Customer Analysis Protocol.

The Analysis Protocol is divided into four sections:

Section 1: Program Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

### **Section 1: Program Information**

#### **Program Title**

Provide a unique title for the program so that it is easily distinguishable from other programs with similar scope. Example: "Replacing 25 kVA 13.8 kV transformers with amorphous-core transformers".

#### **Sites (locations)**

Provide a list of the locations at which equipment was installed under this program. Locations may be identified by the customer addresses, pole numbers, transformer identification numbers, or similar identifiers.

#### **Class/Sector/Industry Description**

For each installation, specify the customer classes (residential, small general service, etc.) served by the equipment, and for non-residential customers, the sector (Industrial, Commercial, Institutional, Multi-family) and type of use (e.g., office, restaurant, dormitory, gas station).

#### **Technology Description**

Describe the type of equipment affected (e.g., line transformer, secondary, etc.), including the range of capacities, wire sizes, span lengths, or other descriptors affecting energy losses.

Describe the existing equipment that was replaced.

Describe the high-efficiency equipment installed in the program. Provide specific details (e.g., wire sizes, transformer loss specifications) relevant to loss computations.

#### **Program Implementation schedule**

Define the implementation schedule for the program, including number of installations by month.

#### **Analysis Contact(s)**

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

### **Section 2: Equipment Loading**



For each type of equipment included in the program, provide (1) the estimated maximum load on the typical or average installation, (2) the estimated average load on the equipment on weekdays between 3:00 p.m. and 6:00 p.m., June through August (the coincident peak period), and (3) the estimated load-duration curve on the equipment.

Include the sources of the estimates, including utility load-research data.

Include any data on the variability of loads among installations, reflecting the number of customers served by the equipment (e.g., customers on a transformer or a span of secondary), the size of customer, and the customer class(es) (e.g., residential, street lighting, small commercial) served.

The load data should reflect the conditions prevailing in the year for which savings are claimed.

Where possible, the annual billed sales to the customers served by the equipment should be used as a check on the total energy usage assumed. Where these data are not available, describe the system configuration (e.g., secondary network) or database limitations that prevent such comparison.

### Section 3: Base and Efficient Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

#### Baseline-Case Losses

For each type of equipment included in the program, compute the annual pre-program losses per unit of equipment as

$$\text{loss}_{\text{base}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_b + 8766 \times \text{NLL}_b$$

where

t = hour  
 FLC = full-load capacity  
 FLLL<sub>b</sub> = load losses at full load  
 NLL<sub>b</sub> = no-load loss/hour

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{base}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_b\} \div H + \text{NLL}_b$$

where

h = hour in the coincident peak period  
 H = number of hours in the coincident peak period

Provide manufacturer's specifications, test results, or standard-reference data for typical baseline equipment for FLC, FLLL, and NLL.

Provide the spreadsheet in which the base losses are computed.

Provide information demonstrating that the existing equipment could have remained in service.

Document that the existing equipment was functioning properly.

Provide certification that the existing equipment was adequate to meet anticipated loads.

Describe the disposition of the existing equipment. If the equipment has been or may be returned to service, explain how that return to service would not offset the claimed loss reductions.

Describe the manner in which equipment was selected for replacement (e.g., vintage, design, location), and provide documentation to demonstrate that the replacements were targeted for loss reduction, rather than actual or imminent failure.

### Efficient-Case Losses

For each type of equipment included in the program, compute the annual losses per unit of the efficient equipment as

$$\text{loss}_{\text{efficient}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_e + 8766 \times \text{NLL}_e$$

where

t = hour  
 FLC = full-load capacity  
 FLLL<sub>e</sub> = load losses at full load  
 NLL<sub>e</sub> = no-load loss/hour

Compute the post-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{efficient}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_e\} \div H + \text{NLL}_e$$

where

h = hour in the coincident peak period  
 H = number of hours in the coincident peak period

Provide manufacturer's specifications or standard-reference data for efficient equipment for FLC, FLLL, and NLL.

Provide the spreadsheet in which the efficient-case losses are computed.

### Savings

$$\text{Energy Savings} = (\text{loss}_{\text{base}} - \text{loss}_{\text{efficient}}) \times (1 + \text{ULF})$$

where

ULF = Upstream Loss Factor, the change in losses on the primary distribution and transmission systems per kWh reduction in secondary losses

$$\text{Peak Savings} = (\text{peakloss}_{\text{base}} - \text{peakloss}_{\text{efficient}}) \times (1 + \text{UPLF})$$

where

ULF = Upstream Peak Loss Factor applicable to the coincident peak period

If the utility has estimates of load-related losses on the primary distribution and transmission systems, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to efficiency improvements in mass plant on the secondary distribution system. Provide the derivation of the estimate of primary and transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

## Section 4: Screening Inputs

### Measure Life

Document the life of each type of added equipment, including reference to the utility's depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components. Where some equipment has a useful life shorter than the analysis period, describe the rationale for the analysis period and assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Discount savings with respect to existing equipment over time, to the extent that the utility would make this (or a similar) change in configuration in the foreseeable future to meet peak load or reliability requirements.

**O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the changes in equipment and to any changes in operating practices.

**Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## T&D Loss Reductions – Large Customer Connection Analysis Protocol

This protocol defines the requirements for analyzing and documenting loss reductions due to installation of distribution equipment to serve interval-metered load in excess of 500 kVA, where the installed equipment has lower losses than

- standard equipment, in the case of incremental improvements over equipment required due to failure, need for increased capacity, or connection of new loads, or
- existing equipment, in the case of retrofit of equipment solely for the energy savings.

Each project may include equipment serving one or a few customers, each with interval metering, at single location. The equipment may also serve small amounts of non-interval-metered street lighting and private area lighting, so long as the load shape of the outdoor lighting can be reasonably estimated.

Examples of distribution plant covered by this protocol include line transformers, secondary lines, service drops, and meters.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

### Section 1: Project Information

#### Project Title

Provide a unique title for the project so that it is easily distinguishable from other projects with similar scope.

Example: “Install low-loss transformers and upgrade service drops for the Midway Office Park”.

#### Sites (locations)

Provide a list of the locations at which equipment was installed under this project. Locations may be identified by the customer number, address, pole numbers, transformer identification numbers, or similar identifiers.

#### Technology Description

Describe the type of equipment affected (e.g., line transformer, secondary, etc.), including the capacity, wire size, span lengths, voltages, or other descriptors affecting energy losses. Provide a one-line diagram of the interconnection.

If this project consists of the incremental increase of efficiency for a new or replacement connection, describe the equipment that would be installed under standard utility practice. Demonstrate that the assumed base efficiency is in fact standard practice, including:

Current Industry Practice – Document current industry practice using articles from industry journals, manufacturers’ sales data, recent distribution standards from other utilities, and/or similar sources.

Applicant Practice – Document the utility’s own recent standard practices through purchase records, distribution standards, internal guidelines for linemen, and similar documents. Document the effect on equipment selection of allowances for growth, including new infill construction in expansion applications.

If this project consists of the loss-driven retrofit of existing connection equipment, describe the existing equipment.

Describe the high-efficiency equipment installed in the project. Provide specific details (e.g., wire sizes, transformer loss specifications) relevant to loss computations.

### Project Implementation schedule

Describe the implementation schedule for the project.

### Analysis Contact(s)

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

## Section 2: Equipment Loading

Provide the hourly customer loads at this location in the report year. If individual loads use only some of the equipment contributing to the efficiency improvement, disaggregate the loads so that load can be determined for each piece of equipment.

Determine

(1) the average load on the line at its input on weekdays between 3:00 p.m. and 6:00 p.m., June through August

(2) total energy delivered to the line.

Where possible, the annual billed sales to the customers served by the equipment should be used as a check on the total energy usage assumed. Where these data are not available, describe the system configuration (e.g., secondary network) or database limitations that prevent such comparison.

## Section 3: Base and Efficient Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

### Baseline-Case Losses

Compute the annual base losses in kWh as

$$\text{loss}_{\text{base}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_b + 8766 \times \text{NLL}_b$$

where

t = hour  
FLC = full-load capacity or other convenient reference load  
FLLL<sub>b</sub> = load losses at FLC  
NLL<sub>b</sub> = no-load loss per hour

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{base}} = \sum_h \{ [\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_b \} \div H + \text{NLL}_b$$

where

h = hour in the coincident peak period  
H = number of hours in the coincident peak period

Where various pieces of equipment are subject to different loadings (e.g., the transformer bank serves the entire load, while each section of secondary serves half the load), compute losses for each type of equipment or load grouping.

Provide manufacturer's specifications or standard-reference data for typical baseline equipment for FLC, FLLL, and NLL.

Provide the spreadsheet in which the base losses are computed.

### Efficient-Case Losses

Compute the annual losses of the efficient equipment as

$$\text{loss}_{\text{efficient}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_e + 8766 \times \text{NLL}_e$$

where

t	= hour
FLC	= full-load capacity
FLLL <sub>e</sub>	= load losses at full load
NLL <sub>e</sub>	= no-load loss per hour

Compute the post-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{efficient}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_e\} \div H + \text{NLL}_e$$

where

h	= hour in the coincident peak period
H	= number of hours in the coincident peak period

Provide manufacturer's specifications or standard-reference data for typical baseline equipment for FLC, FLLL, and NLL.

Provide the spreadsheet in which the efficient-case losses are computed.

### Savings

$$\text{Energy Savings} = (\text{loss}_{\text{base}} - \text{loss}_{\text{efficient}}) \times (1 + \text{UELF})$$

where

UELF	= Upstream Energy Loss Factor, the annual average change in losses on the primary distribution and transmission systems per kWh reduction in secondary losses
------	---

$$\text{Peak Savings} = (\text{peakloss}_{\text{base}} - \text{peakloss}_{\text{efficient}}) \times (1 + \text{UPLF})$$

where

UPLF	= Upstream Peak Loss Factor, the change in losses on the primary distribution and transmission systems per kWh reduction in secondary losses in the coincident peak period
------	--

If the utility has estimates of load-related losses on the primary distribution and transmission systems, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to efficiency improvements on the secondary distribution system. Provide the derivation of the estimate of primary and transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

## Section 4: Screening Inputs

### Measure Life

Document the life of each type of added equipment, including reference to the utility's depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components. Where some equipment has a useful life shorter than the analysis period, describe the rationale for the analysis period and assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Discount savings with respect to existing equipment over time, to the extent that the utility would make this (or a similar) change in configuration in the foreseeable future to meet peak load or reliability requirements.

**O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the changes in equipment and to any changes in operating practices.

**Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## T&D Loss Reductions – Substation Transformer Analysis Protocol

This protocol defines the requirements for analyzing and documenting loss reductions due to installation of efficient substation transformers in any of the following contexts:

- Incremental: installation of one or more high-efficiency transformers instead of a new standard-efficiency transformer
  - when a new transformer is required at a new substation,
  - to increase capacity at an existing substation,
  - to replace a failed or failing transformer
- Retrofit: replacement of an existing transformer with a more efficient transformer, which may be more efficient due to higher-efficiency materials (such as an amorphous core) or due to lower capacity (with lower core losses).

Addition of a transformer or substation to change power flow on the network should be analyzed with the System Reconfiguration Protocol.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

### Section 1: Project Information

#### Project Title

Provide a unique title for the project. Example: “Installation of low-loss amorphous-core transformers at the Midway 138-12.5 kV substation”.

#### Location

Identify the location of the project, by substation name, number, and address.

#### Technology Description

Describe the transformer(s) affected, including voltages and capacity.

Describe the high-efficiency transformer(s) installed in the project. Provide manufacturer specifications.

If this project consists of the incremental increase of efficiency at a new transformer, describe the standard-efficiency transformer that would have been installed under standard utility practice.

If this project consists of the retrofit of a lower-loss transformer in place of an existing transformer, describe the existing equipment that was replaced.

#### Project Implementation schedule

Define the implementation schedule for the project, including the date at which the transformer(s) were energized by month.

#### Analysis Contact(s)

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

### Section 2: Equipment Loading



Provide the hourly load the transformer or substation in the current year and identify:

- (1) the maximum load on the equipment
- (2) the average load on the equipment on weekdays between 3:00 p.m. and 6:00 p.m., June through August (the coincident peak period)

### Section 3: Base and Efficient Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

#### Baseline-Case Losses

For each transformer included in the project, compute the annual pre-project losses in kWh as

$$\text{loss}_{\text{base}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_b + 8766 \times \text{NLL}_b$$

where

t	= hour
FLC	= full-load capacity
FLLL <sub>b</sub>	= load losses at full load
NLL <sub>b</sub>	= no-load loss/hour

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{base}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_b\} \div H + \text{NLL}_b$$

where

h	= hour in the coincident peak period
H	= number of hours in the coincident peak period

Provide manufacturer's specifications, test results, or standard-reference data for the baseline transformer for FLC, FLLL, and NLL.

Provide the spreadsheet in which the base losses are computed.

If this project consists of the incremental increase of efficiency at a new transformer, provide information demonstrating that the assumed base efficiency is in fact standard practice, including:

Current Industry Practice – Document current industry practice using articles from industry journals, manufacturers' sales data, recent distribution standards from other utilities, and/or similar sources.

Applicant Practice – Document the utility's own recent standard practices through purchase records, distribution standards, and similar documents. Provide data on peak forecasts for the substation, supporting the adequacy of the base equipment.

If this project consists of the retrofit of a lower-loss transformer in place of an existing transformer,

Describe the existing equipment that was replaced.

Provide information demonstrating that the existing equipment could have remained in service.

Document that the existing equipment was functioning properly.

Provide certification that the existing equipment was adequate to meet anticipated loads.

Describe the disposition of the existing equipment. If the equipment has been or may be returned to service, explain how that return to service would not offset the claimed loss reductions.

Describe the manner in which the equipment was selected for replacement, and provide documentation to demonstrate that the retrofit was undertaken for loss reduction, rather than actual or imminent failure or inadequacy.

#### **Efficient-Case Losses**

For each transformer included in the project, compute the annual post-project losses in kWh as

$$\text{loss}_{\text{efficient}} = \sum_t [\text{kVA}_t \div \text{FLC}]^2 \times \text{FLLL}_e + 8766 \times \text{NLL}_e$$

where

t = hour  
FLC = full-load capacity  
FLLL<sub>e</sub> = load losses at full load  
NLL<sub>e</sub> = no-load loss/hour

Compute the post-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{efficient}} = \sum_h \{[\text{kVA}_h \div \text{FLC}]^2 \times \text{FLLL}_e\} \div H + \text{NLL}_e$$

where

h = hour in the coincident peak period  
H = number of hours in the coincident peak period

Provide manufacturer's specifications the installed transformer for FLC, FLLL, and NLL.

Provide the spreadsheet in which the efficient-case losses are computed.

#### **Savings**

$$\text{Energy Savings} = (\text{loss}_{\text{base}} - \text{loss}_{\text{efficient}}) \times (1 + \text{TELF})$$

where

TELF = Transmission Energy Loss Factor applicable to the transmission system upstream from the project substation

$$\text{Peak Savings} = (\text{peakloss}_{\text{base}} - \text{peakloss}_{\text{efficient}}) \times (1 + \text{TPLF})$$

where

TPLF = Transmission Peak Loss Factor applicable to the transmission system upstream from the project substation

If the utility has estimates of load-related losses on the transmission system, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to efficiency improvements at distribution substations. For transmission substations, the utility may compute TLF as the portion of transmission losses attributable to voltages equal to or higher than those of the input voltage to the transformer.

Provide the derivation of the estimate of transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

### **Section 4: Screening Inputs**

**Measure Life**

Document the life of each type of added equipment, including reference to the utility's depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components, in this case the transformers. Where some equipment has a useful life shorter than the analysis period, describe the assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Where the utility would make a similar investment in the foreseeable future to meet peak load or reliability requirements, the analysis period should be limited to the period prior to that need date, and reflect the present value of the differences in capital costs.

**Operations Effects**

The estimates of baseline and efficiency case losses should reflect the operating practices expected to be in place for the base and efficient equipment.

**O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the change in equipment (including the effect of replacing old equipment with new equipment) and to any changes in operating practices.

**Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## T&D Loss Reductions – System Reconfiguration Analysis Protocol

This protocol defines the requirements for analyzing and documenting loss reductions due to changes undertaken to change network power flows and reduce losses, including (but not necessarily limited to) any of the following contexts:

- Addition of a substation or substation transformer.
- Addition of a new primary circuit or transmission line.
- Addition of capacitors.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

### Section 1: Project Information

#### Project Title

Provide a unique title for the project. Example: “Installation of new Midway 138-12.5 kV substation and reconfiguration of feeders K181 and K182”.

#### Location

Identify the location of the project, by substation name, number, and address; line number and connecting substations; and/or other relevant identification.

#### Technology Description

Describe the equipment added, including voltages and capacity, and the major network elements (lines and substations) affected by the reconfiguration.

If the project includes the addition of capacitors, describe the connection of the capacitors (e.g., shunt, series), their kVAR capacity, and the levels to which they can be switched.

#### Project Implementation schedule

Define the implementation schedule for the project, including the date at which each major project element was put into service.

#### Analysis Contact(s)

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

### Section 2: Equipment Loading

Provide the hourly loads on each of the major affected network elements for the last full year prior to the installation of the first element of the project.

For the current year, provide the hourly loads on

- (1) each of the major affected network elements identified above
- (2) each major element of the project (e.g., line, transformer or substation) in.

For capacitors, provide

- (1) the hourly loads in the current year on the substation or other equipment to which the capacitors are attached.
- (2) the hours in the current year for which the capacitors were activated at each kVAR level

Based upon the loading of the new equipment, identify N load patterns, such that each hour within the year is reasonably well represented by a load pattern and N is a tractable number for modeling and evaluation.

At least one load pattern should represent typical power flows during the coincident peak period (weekdays between 3:00 p.m. and 6:00 p.m., June through August).

The load pattern should be representative of the hours modeled, in terms of the direction of power flow, the level of power flow, and the operation of capacitors.

Describe the load-pattern selection process.

Identify the hours that are represented by each load pattern.

Loss reductions in some hours may be zero or nearly so (e.g., hours in which capacitors are switched off, hours with very low flows on the affected equipment). These hours may be ignored, so long as any increase in no-load losses is also insignificant.

### Section 3: Base and Efficient Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

#### Baseline-Case Losses

Using computer software appropriate to the application, model the relevant portions of the distribution and/or transmission system for each load pattern  $n$  (where  $n = 1$  to  $N$ ). Compute  $loss_n$ , the sum of load and no-load losses in the study area for load pattern  $n$ .

Where possible, compare the transmission flows and losses modeled for the load pattern for the actual metered loads in some hours of the pre-project historical period. Where such comparisons are not possible, explain why.

Determine annualized base pre-project losses in kWh as

$$loss_{base} = \sum_n loss_{n,b} \times hours_n \quad (1)$$

where

$n$  = load pattern,  $n = 1$  to  $N$   
 $loss_{n,b}$  = total modeled base losses in the study area  
 $hours_n$  = hours in load pattern  $n$

Compute the pre-project losses in the coincident peak period in kW as

$$peakloss_{base} = \sum_n loss_{n,b} \times hours_n \div H \quad (2)$$

where

$n$  = load pattern, for those load patterns representing the coincident peak period  
 $H$  = number of hours in the coincident peak period

Provide the spreadsheet in which the base losses are computed.

### Post-project Losses

Using actual metered data where available and modeling results otherwise (using the same software used in the base case), compute total load and no-load losses in the study area for each load pattern for the actual conditions in the report year, with the project.

Compute annual post-project losses as

$$\text{loss}_{\text{efficient}} = \sum_n \text{loss}_{m,n,e} \times \text{hours}_n + \sum_t \text{loss}_{a,t} \quad (3)$$

where

$\text{loss}_{m,n,e}$  = losses in modeled load pattern  $n$  with the post-project actual configuration  
 $t$  = hours in the year, excluded hours expected to have negligible loss reductions  
 $\text{loss}_{a,t}$  = actual losses in hour  $t$  in the report year

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{base}} = \sum_n \{ \text{loss}_{n,e} \times \text{hours}_n + \sum_h \text{loss}_{a,h} \} \div H \quad (4)$$

where

$n$  = load pattern, for those load patterns representing the coincident peak period  
 $h$  = hour in the coincident peak period in the report year  
 $H$  = number of hours in the coincident peak period

For comparison, provide the total modeled losses for the year and in the coincident peak period, with the post-project configuration.

### Savings

$$\text{Energy Savings} = (\text{loss}_{\text{base}} - \text{loss}_{\text{efficient}}) \times (1 + \text{TELF})$$

where

$\text{TELF}$  = Transmission Energy Loss Factor applicable to the transmission system upstream from the study area

$$\text{Peak Savings} = (\text{peakloss}_{\text{base}} - \text{peakloss}_{\text{efficient}}) \times (1 + \text{TPLF})$$

where

$\text{TPLF}$  = Transmission Peak Loss Factor applicable to the transmission system upstream from the study area

If the utility has estimates of load-related losses on the transmission system, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to reconfiguration on the distribution system. For reconfigurations that affect flows on the transmission system, the utility may compute TLF as the portion of transmission losses attributable to voltages equal to or higher than those modeled in the study area.

Provide the derivation of the estimate of transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

## Section 4: Screening Inputs

### Measure Life

Document the life of each type of added equipment, including reference to the utility's depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components. Where some equipment has a useful life shorter than the analysis period, describe the rationale for the analysis period and assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Where the utility would make this (or a similar) change in configuration in the foreseeable future to meet peak load or reliability requirements, the analysis period should be limited to the period prior to that need date, and reflect the present value of the differences in capital costs.

**Operations Effects**

The estimates of baseline and efficiency case losses should reflect the operating practices be expected to be in place in each configuration.

**O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the additional equipment and to any changes in operating practices.

**Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## **T&D Loss Reductions – Voltage Conversion Analysis Protocol**

This protocol defines the requirements for analyzing and documenting loss reductions due to increasing the voltage on an existing primary circuit or transmission line, where the voltage increase is not needed for additional capacity to meet load.

Where increasing the voltage on a primary circuit or transmission line is expected to significantly change power flow on the network, the effect on losses should be analyzed with the System Reconfiguration Protocol.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

### **Section 1: Project Information**

#### **Project Title**

Provide a unique title for the project. Example: “Increase Halfland-to-Midway transmission line from 69 kV to 115 kV.”

#### **Location**

Identify the location of the project, by utility line number and names of substation(s) connected.

#### **Technology Description**

Describe the lines affected, including conductors, length, and pre- and post-project voltages.

Describe and enumerate the transformers connected to the line, both at substations and (for distribution projects) line transformers. Explain how each category of transformer was converted to the higher voltage (replacement, change in taps).

For any transformer replaced as part of the project, describe and provide manufacturer specifications for the original and replacement transformers.

Describe the required replacement of poles, insulators, sectionalizers, and other ancillary equipment.

#### **Project Implementation schedule**

Define the implementation schedule for the project, including the replacement of transformers and insulators, as required.

#### **Analysis Contact(s)**

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

### **Section 2: Equipment Loading**

Identify whether power flow on the line is unidirectional or bidirectional, and if the latter, the share of hours of the report year in which power flowed in each direction.

For each interval-metered location along the line affected, provide the hourly loads in the report year and identify:

- (1) the average load on the line at its input on weekdays between 3:00 p.m. and 6:00 p.m., June through August



(2) total energy delivered to the line.

Provide any available information regarding the distribution of load along the line, including

(1) hourly load for large loads along the line (e.g., for distribution circuits, large commercial and industrial customers; for transmission circuits, substations, industrial customers and wholesale loads)

(2) where hourly data are not available, the distribution of annual deliveries along the line

Include the sources of the data and estimates. Explain any corrections for misread or missing data.

Define segments of the line based on the location of large point loads and the density of smaller loads, so that within each segment either:

(1) the current is constant within the segment, or

(2) the change in current per mile is constant within the segment (i.e., uniformly distributed load).

(In either case, “constant” means “to the extent feasible given data limitations.”)

Demonstrate that the power flows on the segments are consistent with one another and the power delivered to the line input.

Take hourly amperage directly from data logs or compute from power-flow data.

### Section 3: Pre-project and Post-Project Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

#### Pre-Case Losses

For each segment of the line, compute the annual pre-project losses in MWh as

$$\text{loss}_{\text{pre}} = \Phi \times k \times \sum_t A_{\text{pre},i,t}^2 \times R \div 10^6$$

where

t = hour

$A_{\text{pre},i,t}$  = amperage flowing into the segment

R = resistance of the segment in ohms

$\Phi$  = 1.73 for three-phase lines and 1.00 for single-phase lines

k = 1.0, for segments with constant current

=  $(0.67 \times A_o + 0.33 \times A_i) \div A_i$ , for segments with constant change in current per mile

$A_o$  = amperage flowing out of the segment

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{pre}} = \Phi \times k \times \sum_h A_{\text{pre},i,h}^2 \times R \div 10^3$$

where

h = hour in the coincident peak period

H = number of hours in the coincident peak period

Provide manufacturer’s specifications, test results, or standard-reference data for the conductor for R.

$A_{\text{pre},i,t}$  will normally be equal to  $A_{\text{post},i,t} \times V_{\text{pre}} \div V_{\text{post}}$

Provide the spreadsheet in which the base losses are computed.

### Post-Case Losses

For each segment of the line, compute the annual post-project losses in MWh as

$$\text{loss}_{\text{post}} = \Phi \times k \times \sum_t A_{\text{post},i,t}^2 \times R \div 10^6$$

where

$t$  = hour

$A_{\text{post},i,t}$  = amperage flowing into segment  $i$  in hour  $t$

$R_e$  = resistance of the segment in ohms

$\Phi$  = 1.73 for three-phase lines and 1.00 for single-phase lines

$k$  = 1.0, for segments with constant current

=  $(0.67 \times A_o + 0.33 \times A_i) \div A_i$ , for segments with constant change in current per mile

$A_o$  = amperage flowing out of the segment

Compute the post-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{post}} = \Phi \times k \times \sum_h A_{\text{post},i,h}^2 \times R \div 10^3$$

Provide the spreadsheet in which the efficient-case losses are computed.

### Savings

$$\text{Energy Savings} = (\text{loss}_{\text{pre}} - \text{loss}_{\text{post}}) \times (1 + \text{TELF})$$

where

TELF = Transmission Energy Loss Factor applicable to the transmission system upstream from the project

$$\text{Peak Savings} = (\text{peakloss}_{\text{pre}} - \text{peakloss}_{\text{post}}) \times (1 + \text{TPLF})$$

where

TPLF = Transmission Peak Loss Factor applicable to the transmission system upstream from the project

If the utility has estimates of load-related losses on the transmission system, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to efficiency improvements on primary distribution lines. For transmission lines, the utility may compute TLF as the portion of transmission losses attributable to voltages equal to or higher than those of the input voltage to the project line.

Provide the derivation of the estimate of transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

## Section 4: Screening Inputs

### Measure Life

Document the life of each type of added equipment, including reference to the utility's depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components. Where some equipment has a useful life shorter than the analysis period, describe the rationale for the analysis period and assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Where the utility would make this investment in the foreseeable future to meet peak load or reliability requirements, the analysis period should be limited to the period prior to that need date, and reflect the present value of the differences in capital costs.

**Operations Effects**

The estimates of baseline and efficiency case losses should reflect the operating practices be expected to be in place for the base and efficient voltage levels.

**O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the change in equipment (including the effect of replacing old equipment with new equipment) and to any changes in operating practices.

**Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## T&D Loss Reductions – Conductor Analysis Protocol

This protocol defines the requirements for analyzing and documenting loss reductions due to installation of efficient conductors in any of the following contexts:

- Incremental: installation of lower-resistance conductor instead of standard conductors
  - when a new primary circuit or transmission line is constructed,
  - to increase the capacity of an existing line,
  - when a line is relocated due to highway widening or similar conditions,
  - to replace aging conductor that is becoming unreliable due to mechanical stress
- Retrofit: replacement of existing conductor with lower-resistance conductor, where the replacement is not otherwise necessary to meet utility reliability standards.

For any of these contexts, the installation of the lower-resistance conductor must not be needed for additional capacity to meet load.

Addition of a primary circuit or transmission line to change power flow on the network should be analyzed with the System Reconfiguration Protocol.

The Analysis Protocol is divided into four sections:

Section 1: Project Information

Section 2: Equipment Loading

Section 3: Base and Efficient Cases and Savings

Section 4: Screening Inputs

### Section 1: Project Information

#### Project Title

Provide a unique title for the project. Example: “Reconductor Halfland-to-Midway 69 kV transmission line from 3/0 ACSR to 336.4 ACSR”.

#### Location

Identify the location of the project, by utility line number, names of substation(s) connected, and any other relevant geographical descriptors for the project (e.g., the roadways along with the relocation project is required).

#### Technology Description

Describe the lines affected, including voltages and length.

Describe the high-efficiency conductors installed in the project. Provide manufacturer specifications.

If this project consists of the incremental increase of efficiency for a new or replacement line, describe the conductor that would be installed under standard utility practice.

If this project consists of the loss-driven retrofit of existing conductor, describe the existing conductor.

#### Project Implementation schedule

Define the implementation schedule for the project, including the spans installed by month.

#### Analysis Contact(s)

Provide contact information for the personnel responsible for tracking installations and for estimating loss reductions, including company name, individual(s) name, address, phone and email.

### Section 2: Equipment Loading

Identify whether power flow on the line is unidirectional or bidirectional, and if the latter, the share of hours of the report year in which power flowed in each direction.

For each interval-metered location along the line affected, provide the hourly loads in the report year and identify:

- (1) the average load on the line at its input on weekdays between 3:00 p.m. and 6:00 p.m., June through August
- (2) total energy delivered to the line.

Provide any available information regarding the distribution of load along the line, including

- (1) hourly load for large loads among the line (e.g., for distribution circuits, large commercial and industrial customers; for transmission circuits, substations, industrial customers and wholesale loads)
- (2) where hourly data are not available, the distribution of annual deliveries along the line

Include the sources of the data and estimates. Explain any corrections for misread or missing data.

Define segments of the line based on the location of large point loads and the density of smaller loads, so that within each segment either:

- (1) the current is constant within the segment, or
- (2) the change in current per mile is constant within the segment (i.e., uniformly distributed load).

(In either case, “constant” means “to the extent feasible given data limitations.”)

Demonstrate that the power flows on the segments are consistent with one another and the power delivered to the line input.

Take hourly amperage directly from data logs or compute from power-flow data.

### Section 3: Base and Efficient Cases

Calculate and document energy losses for the efficient and base cases as outlined below.

#### Baseline-Case Losses

For each segment of the line, compute the annual pre-project losses in MWh as

$$\text{loss}_{\text{base},i} = \Phi \times k \times \sum_t A_{it}^2 \times R_b \div 10^6$$

where

t	= hour
i	= segment number
A <sub>i</sub>	= amperage flowing into the segment
R <sub>b</sub>	= resistance of the segment in ohms
Φ	= 1.73 for three-phase lines and 1.00 for single-phase lines
k	= 1.0, for segments with constant current
	= (0.67 × A <sub>o</sub> + 0.33 × A <sub>i</sub> ) ÷ A <sub>i</sub> , for segments with constant change in current per mile
A <sub>o</sub>	= amperage flowing out of the segment

Compute the pre-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{base},i} = \Phi \times k \times \sum_h A_{ih}^2 \times R_b \div H \div 10^3$$

where

h = hour in the coincident peak period  
H = number of hours in the coincident peak period

Provide manufacturer's specifications, test results, or standard-reference data for the conductor for  $R_b$ .

Provide the spreadsheet in which the base losses are computed.

If this project consists of the incremental decrease of resistance for a new or replacement line, provide information demonstrating that the assumed base efficiency is in fact standard practice, including:

Current Industry Practice – Document current industry practice using articles from industry journals, manufacturers' sales data, recent distribution standards from other utilities, and/or similar sources.

Applicant Practice – Document the utility's own recent standard practices through purchase records, distribution standards, and similar documents. Provide data on peak forecasts for the line, supporting the adequacy of the base conductor.

If this project consists of the retrofit of lower-loss conductor solely for loss reductions,

Describe the existing conductor that was replaced.

Provide information demonstrating that the existing conductor could have remained in service.

Document that the existing conductor was functioning properly.

Provide certification that the existing conductor was adequate to meet anticipated loads.

Describe the disposition of the existing conductor.

Describe the manner in which the line was selected for retrofit, and provide documentation to demonstrate that the retrofit was undertaken for loss reduction, rather than actual or imminent failure or inadequacy.

### Efficient-Case Losses

For each segment of the line, compute the annual post-project losses in MWh as

$$\text{loss}_{\text{efficient},i} = \Phi \times k \times \sum_t A_{it}^2 \times R_e \div 10^6$$

where

t = hour  
i = segment number  
 $A_i$  = amperage flowing into the segment  
 $R_e$  = resistance of the segment in ohms  
 $\Phi$  = 1.73 for three-phase lines and 1.00 for single-phase lines  
k = 1.0, for segments with constant current  
=  $(0.67 \times A_o + 0.33 \times A_i) \div A_i$ , for segments with constant change in current per mile  
 $A_o$  = amperage flowing out of the segment

Compute the post-project losses in the coincident peak period in kW as

$$\text{peakloss}_{\text{efficient},i} = \Phi \times k \times \sum_h A_{ih}^2 \times R_e \div H \div 10^3$$

Provide manufacturer's specifications, test results, or standard-reference data for the conductor for  $R_c$ .

Provide the spreadsheet in which the efficient-case losses are computed.

### **Savings**

$$\text{Energy Savings} = \sum_i (\text{loss}_{\text{base},i} - \text{loss}_{\text{efficient},i}) \times (1 + \text{TELF})$$

where

TELF = Transmission Energy Loss Factor applicable to the transmission system upstream from the project

$$\text{Peak Savings} = \sum_i (\text{peakloss}_{\text{base},i} - \text{peakloss}_{\text{efficient},i}) \times (1 + \text{TPLF})$$

where

TPLF = Transmission Peak Loss Factor applicable to the transmission system upstream from the project

If the utility has estimates of load-related losses on the transmission system, and uses those estimates in screening customer end-use efficiency measures, it may add those losses to the load reduction due to efficiency improvements on primary distribution lines. For transmission lines, the utility may compute TLF as the portion of transmission losses attributable to voltages equal to or higher than those of the input voltage to the project line.

Provide the derivation of the estimate of transmission losses, and demonstrate the consistency of the claimed losses with the loss values used for the savings behind the customer meter.

## **Section 4: Screening Inputs**

### **Measure Life**

Document the life of each type of added equipment, including reference to the utility's depreciation studies. The efficient case analysis is typically performed over the lifetime of the major components. Where some equipment has a useful life shorter than the analysis period, describe the assumptions regarding the replacement cost of equipment with lives shorter than the analysis period.

Where the utility would make a similar investment in the foreseeable future to meet peak load or reliability requirements, including the need to replace aging conductor, the analysis period should be limited to the period prior to that need date, and reflect the present value of the differences in capital costs.

### **Operations Effects**

The estimates of baseline and efficiency case losses should reflect the operating practices be expected to be in place for the base and efficient conductors.

### **O&M Cost Effects**

Include any foreseeable changes in O&M costs related to the change in conductor (including the effect of replacing old conductor with new conductor) and to any changes in operating practices.

### **Cost**

Document the actual cost of the project, including equipment, internal and contract labor, allocated overheads, design, engineering, and permitting.

## **VI. Appendices**

- A. Prototypical Building Energy Simulation Model Development
- B. Custom Analysis Template
- C. Documentation Summary Worksheet for Custom Projects
- D. TRM Maintenance and Update Process



## Appendix A – Prototypical Building Energy Simulation Model Development

Many of the savings values from the TRM are derived from DOE-2.2 simulations of typical commercial buildings. These prototypes were originally developed for the TRM document filed jointly by the Ohio electric utilities (*Technical Reference Manual (TRM) for Ohio Senate Bill 221, Energy Efficiency and Conservation Program and 09-512-GE-UNC*, October 15, 2009). They are based on building prototypes originally developed to calculate savings for California's Database for Energy Efficient Resources (DEER), with certain parameters adjusted to Ohio building practice based on Duke Energy program experience and a review of the U.S. Energy Information Administration's (EIA) Commercial Buildings Energy Consumption Survey (CBECS). The following sections provide a description of the prototypical buildings and a summary of key modeling assumptions.

### Commercial Building Prototype Model Development

Commercial sector prototype building models were developed for a series of small commercial buildings with packaged rooftop HVAC systems, including assembly, big box retail, fast food restaurant, full service restaurant, grocery, light industrial, primary school, small office and small retail buildings. A large office prototype was also included to analyze measures associated with built-up HVAC systems. The following sections describe the prototypical simulation models used in this analysis.


#### Assembly

A prototypical building energy simulation model for an assembly building was developed using the DOE-2.2 building energy simulation program. The characteristics of the prototype are summarized in Table 11.

**Table 11. Assembly Prototype Building Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	34,000 square feet Auditorium: 33,240 SF Office: 760 SF
Number of floors	1
Wall construction and R-value	Concrete block, R-5
Roof construction and R-value	Wood frame with built-up roof, R-12
Glazing type	Multipane Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Auditorium: 1.9 W/SF Office: 1.55 W/SF
Plug load density	Auditorium: 1.2 W/SF Office: 1.7 W/SF
Operating hours	Mon-Sun: 8am – 9pm
HVAC system type	Packaged single zone, no economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the prototype is shown in Figure 2.

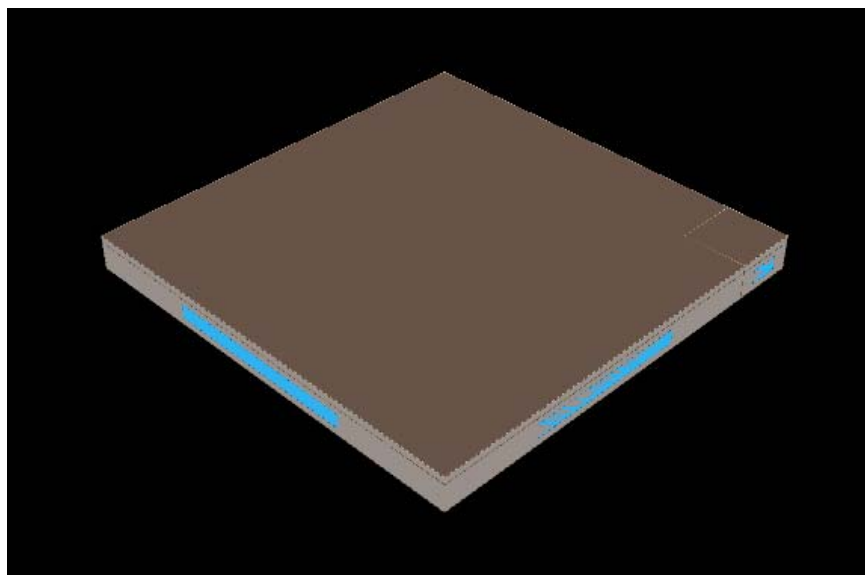

**Figure 2. Assembly Building Rendering**

### **Big Box Retail**


A prototypical building energy simulation model for a big box retail building was developed using the DOE-2.2 building energy simulation program. The characteristics of the prototype are summarized in Table 12.

**Table 12. Big Box Retail Prototype Building Description**

<b>Characteristic</b>	<b>Value</b>
Vintage	Existing (1970s) vintage
Size	130,500 square feet Sales: 107,339 SF Storage: 11,870 SF Office: 4,683 SF Auto repair: 5,151 SF Kitchen: 1,459 SF
Number of floors	1
Wall construction and R-value	Concrete block with insulation, R-7.5
Roof construction and R-value	Metal frame with built-up roof, R-13.5
Glazing type	Multipane; Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Sales: 2.15 W/SF Storage: 0.85 W/SF (Active) 0.45 W/SF (Inactive) Office: 1.55 W/SF Auto repair: 1.7 W/SF Kitchen: 2.2 W/SF
Plug load density	Sales: 1.15 W/SF Storage: 0.23 W/SF Office: 1.73 W/SF Auto repair: 1.15 W/SF Kitchen: 3.23 W/SF
Operating hours	Mon-Sun: 10am – 9pm
HVAC system type	Packaged single zone, no economizer

Characteristic	Value
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the prototype is shown in Figure 3.

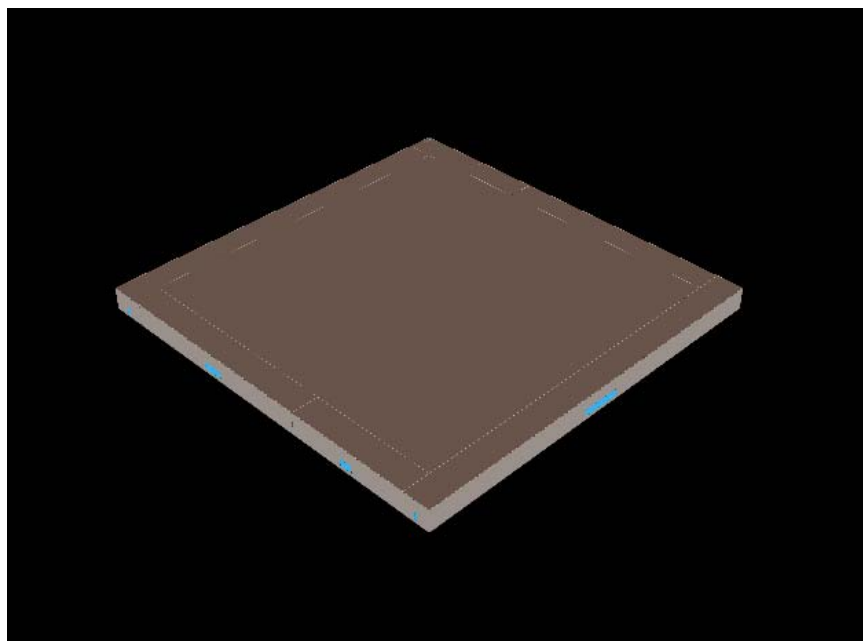

**Figure 3. Big Box Retail Building Rendering**

### Fast Food Restaurant


A prototypical building energy simulation model for a fast food restaurant was developed using the DOE-2.2 building energy simulation program. The characteristics of the prototype are summarized in Table 13.

**Table 13. Fast Food Restaurant Prototype Building Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	2000 square feet 1000 SF dining 600 SF entry/lobby 300 SF kitchen 100 SF restroom
Number of floors	1
Wall construction and R-value	Concrete block with brick veneer, R-7.5
Roof construction and R-value	Concrete deck with built-up roof, R-13.5
Glazing type	Multipane Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Dining: 1.7 W/SF Entry area: 1.7 W/SF Kitchen: 2.2 W/SF Restroom: 0.9 W/SF

Characteristic	Value
Plug load density	0.6 W/SF dining 0.6 W/SF entry/lobby 4.3 W/SF kitchen 0.2 W/SF restroom
Operating hours	Mon-Sun: 6am – 11pm
HVAC system type	Packaged single zone, no economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the prototype is shown in Figure 4.

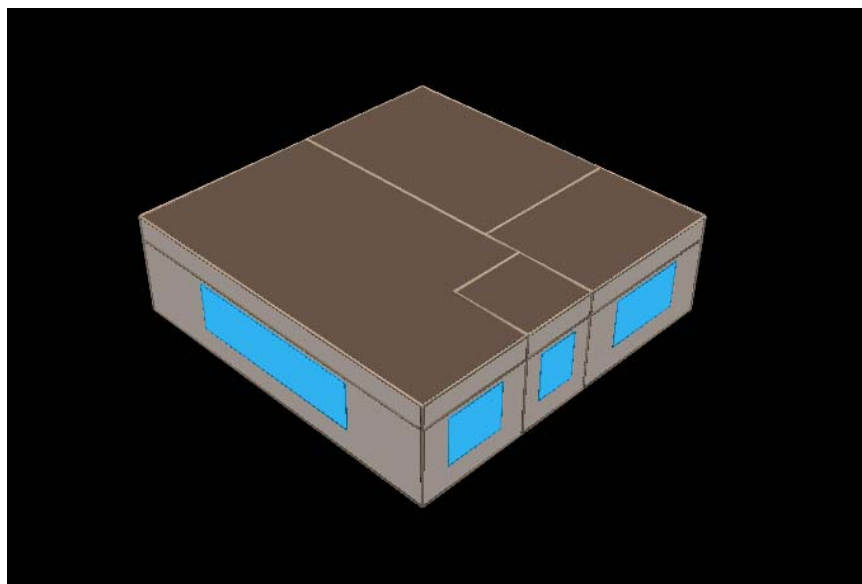

**Figure 4. Fast Food Restaurant Building Rendering**

#### **Full-Service Restaurant**


A prototypical building energy simulation model for a full-service restaurant was developed using the DOE-2.2 building energy simulation program. The characteristics of the full service restaurant prototype are summarized in Table 14.

**Table 14. Full Service Restaurant Prototype Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	2000 square foot dining area 600 square foot entry/reception area 1200 square foot kitchen 200 square foot restrooms
Number of floors	1
Wall construction and R-value	Concrete block with brick veneer, R-7.5
Roof construction and R-value	Wood frame with built-up roof, R-13.5
Glazing type	Multipane; Shading-coefficient = 0.84 U-value = 0.72

Characteristic	Value
Lighting power density	Dining area: 1.7 W/SF Entry area: 1.7 W/SF Kitchen: 2.2 W/SF Restrooms: 1.5 W/SF
Plug load density	Dining area: 0.6 W/SF Entry area: 0.6 W/SF Kitchen: 3.1 W/SF Restrooms: 0.2 W/SF
Operating hours	9am – 12am
HVAC system type	Packaged single zone, no economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the full-service restaurant prototype is shown in Figure 5.

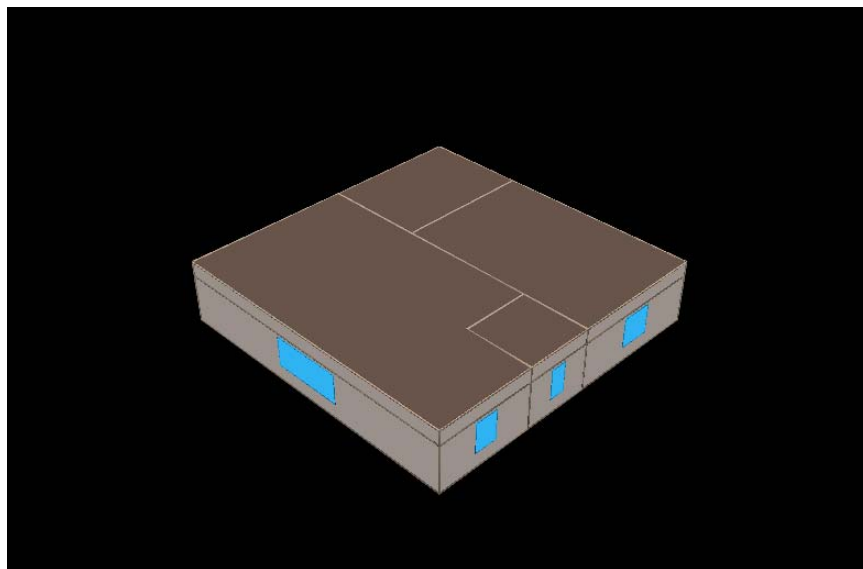

**Figure 5. Full Service Restaurant Prototype Rendering**

### Grocery


A prototypical building energy simulation model for a grocery building was developed using the DOE-2.2 building energy simulation program. The characteristics of the prototype are summarized in Table 15.

**Table 15. Grocery Prototype Building Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	50,000 square feet Sales: 40,000 SF Office and employee lounge: 3,500 SF Dry storage: 2,860 SF 50 °F prep area: 1,268 SF 35 °F walk-in cooler: 1,560 SF

Characteristic	Value
	- 5 °F walk-in freezer: 812 SF
Number of floors	1
Wall construction and R-value	Concrete block with insulation, R-5
Roof construction and R-value	Metal frame with built-up roof, R-12
Glazing type	Single pane clear
Lighting power density	Sales: 3.36 W/SF Office: 2.2 W/SF Storage: 1.82 W/SF 50°F prep area: 4.3 W/SF 35°F walk-in cooler: 0.9 W/SF - 5°F walk-in freezer: 0.9 W/SF
Equipment power density	Sales: 1.15 W/SF Office: 1.73 W/SF Storage: 0.23 W/SF 50°F prep area: 0.23 W/SF + 36 kBtu/hr process load 35°F walk-in cooler: 0.23 W/SF + 17 kBtu/hr process load - 5°F walk-in freezer: 0.23 W/SF+ 29 kBtu/hr process load
Operating hours	Mon-Sun: 6am – 10pm
HVAC system type	Packaged single zone, no economizer
Refrigeration system type	Air cooled multiplex
Refrigeration system size	Low temperature (-20°F suction temp): 23 compressor ton Medium temperature (18°F suction temp): 45 compressor ton
Refrigeration condenser size	Low temperature: 535 kBtu/hr THR Medium temperature: 756 kBtu/hr THR
Thermostat setpoints	Occupied hours: 74°F cooling, 70°F heating Unoccupied hours: 79°F cooling, 65°F heating

A computer-generated sketch of the prototype is shown in Figure 6.

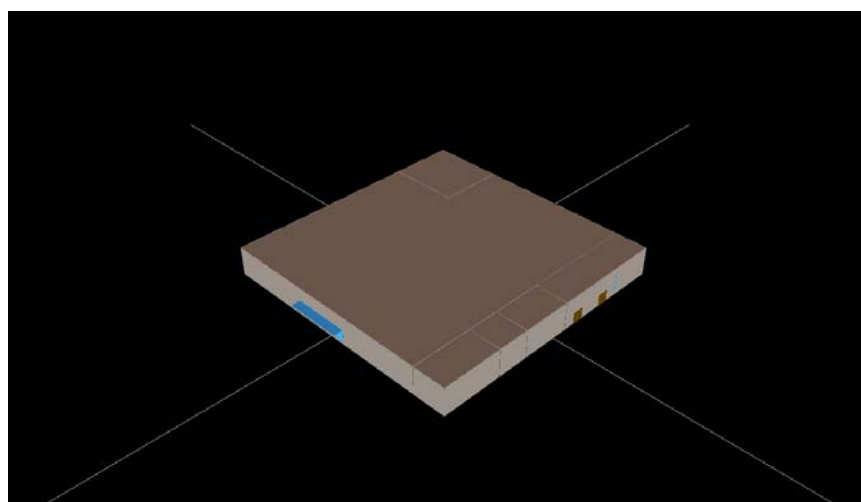

**Figure 6. Grocery Building Rendering**

### Large Office


A prototypical building energy simulation model for a large office building was developed using the DOE-2.2 building energy simulation program. The characteristics of the prototype are summarized in Table 16.

**Table 16. Large Office Prototype Building Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	350,000 square feet
Number of floors	10
Wall construction and R-value	Glass curtain wall, R-7.5
Roof construction and R-value	Built-up roof, R-13.5
Glazing type	Multipane; Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Perimeter offices: 1.55 W/SF Core offices: 1.45 W/SF
Plug load density	Perimeter offices: 1.6 W/SF Core offices: 0.7 W/SF
Operating hours	Mon-Sat: 9am – 6pm Sun: Unoccupied
HVAC system types	1. Central constant volume system with perimeter hydronic reheat, without economizer; 2. Central constant volume system with perimeter hydronic reheat, with economizer; 3. Central VAV system with perimeter hydronic reheat, with economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Chiller type	Water cooled and air cooled
Chilled water system type	Constant volume with 3 way control valves,
Chilled water system control	Constant CHW Temp, 45 deg F setpoint
Boiler type	Hot water, 80% efficiency
Hot water system type	Constant volume with 3 way control valves,
Hot water system control	Constant HW Temp, 180 deg F setpoint
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

Each set of measures was run using each of three different HVAC system configurations – a constant volume reheat system without economizer, a constant volume reheat system with economizer and a VAV system with economizer. The constant volume reheat system without economizer represents system with the most heating and cooling operating hours, while the VAV system with economizer represents a system with the least heating and cooling hours. This presents a range of system loads and energy savings for each measure analyzed.

A computer-generated sketch of the prototype is shown in Figure 7. Note, the middle floors, since they thermally equivalent, are simulated as a single floor, and the results are multiplied by 8 to represent the energy consumption of the 8 middle floors.

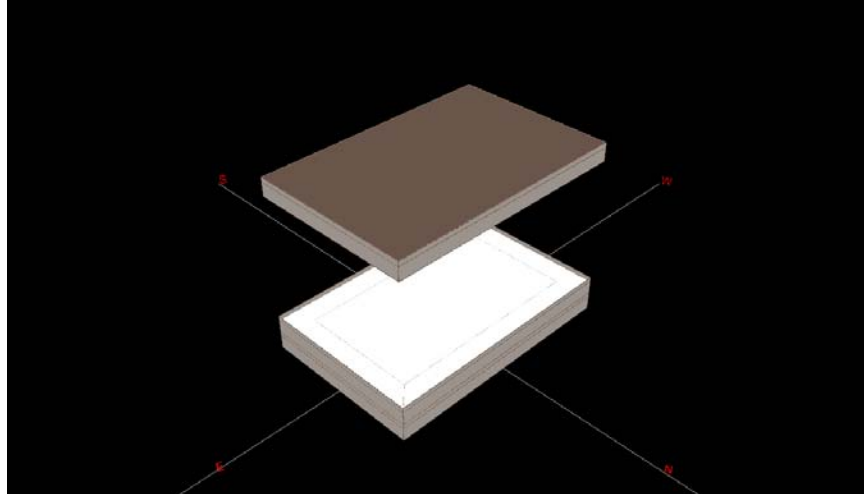

**Figure 7. Large Office Building Rendering**

### **Light Industrial**


A prototypical building energy simulation model for a light industrial building was developed using the DOE-2.2 building energy simulation program. The characteristics of the prototype are summarized in Table 17.

**Table 17. Light Industrial Prototype Building Description**

<b>Characteristic</b>	<b>Value</b>
Vintage	Existing (1970s) vintage
Size	100,000 square feet total 80,000 SF factory 20,000 SF warehouse
Number of floors	1
Wall construction and R-value	Concrete block with Brick, no insulation, R-5
Roof construction and R-value	Concrete deck with built-up roof, R-12
Glazing type	Multipane; Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Factory – 2.25 W/SF Warehouse – 0.7 W/SF
Plug load density	Factory – 1.2 W/SF Warehouse – 0.2 W/SF
Operating hours	Mon-Fri: 6am – 6pm Sat Sun: Unoccupied
HVAC system type	Packaged single zone, no economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the prototype is shown in Figure 8.



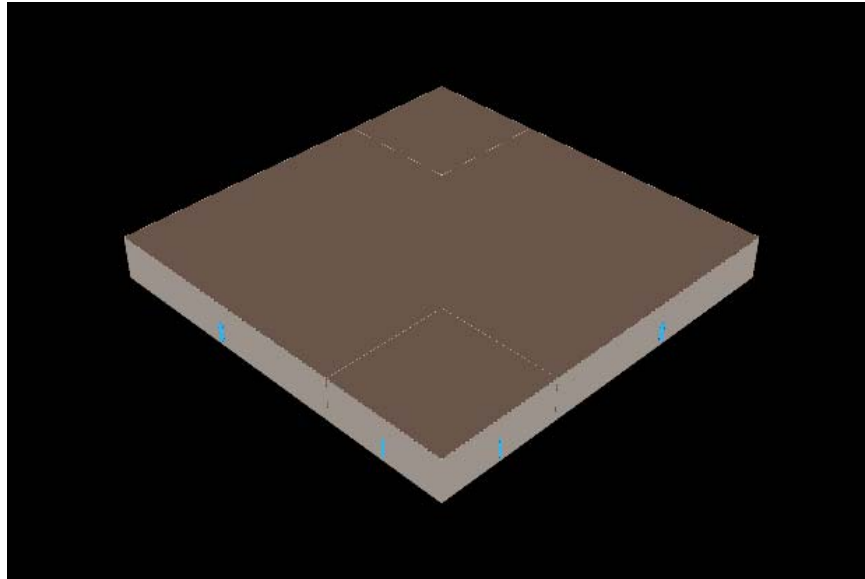

**Figure 8. Light Industrial Building Rendering**

### Primary School


A prototypical building energy simulation model for an elementary school was developed using the DOE-2.2 building energy simulation program. The model is really of two identical buildings oriented in two different directions. The characteristics of the prototype are summarized in Table 18.

**Table 18. Elementary School Prototype Building Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	2 buildings, 25,000 square feet each; oriented 90° from each other Classroom: 15,750 SF Cafeteria: 3,750 SF Gymnasium: 3,750 SF Kitchen: 1,750 SF
Number of floors	1
Wall construction and R-value	Concrete with brick veneer, R-7.5
Roof construction and R-value	Wood frame with built-up roof, R-13.5
Glazing type	Multipane Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Classroom: 1.8 W/SF Cafeteria: 1.3 W/SF Gymnasium: 1.7 W/SF Kitchen: 2.2 W/SF
Plug load density	Classroom: 1.2 W/SF Cafeteria: 0.6 W/SF Gymnasium: 0.6 W/SF Kitchen: 4.2 W/SF
Operating hours	Mon-Fri: 8am – 6pm Sun: 8am – 4pm
HVAC system type	Packaged single zone, no economizer

Characteristic	Value
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the prototype is shown in Figure 9.

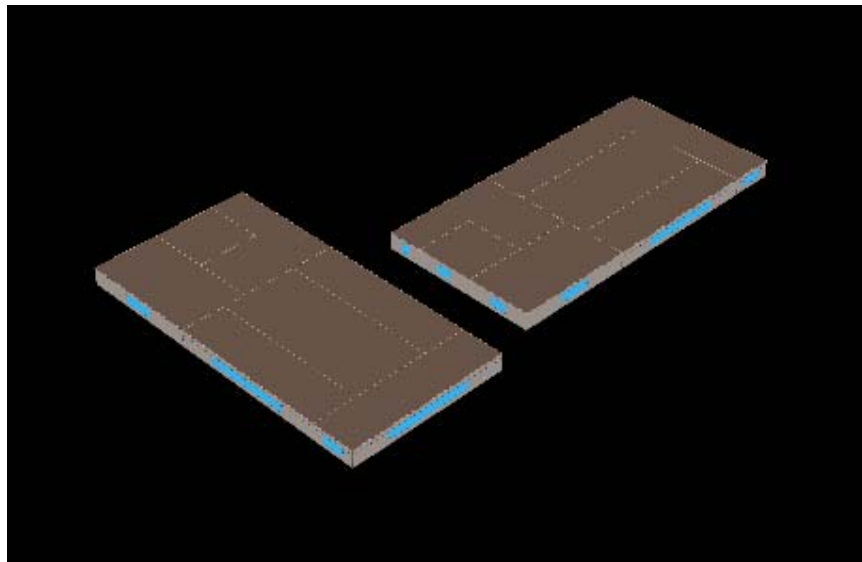

**Figure 9. School Building Rendering**

#### Small Office


A prototypical building energy simulation model for a small office was developed using the DOE-2.2 building energy simulation program. The characteristics of the small office prototype are summarized in Table 19.

**Table 19. Small Office Prototype Building Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	10,000 square feet
Number of floors	2
Wall construction and R-value	Wood frame with brick veneer, R-7.5
Roof construction and R-value	Wood frame with built-up roof, R-13.5
Glazing type	Multipane; Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Perimeter offices: 1.55 W/SF Core offices: 1.45 W/SF
Plug load density	Perimeter offices: 1.6 W/SF Core offices: 0.7 W/SF
Operating hours	Mon-Sat: 9am – 6pm Sun: Unoccupied
HVAC system type	Packaged single zone, no economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.

Characteristic	Value
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the small office prototype is shown in Figure 10.

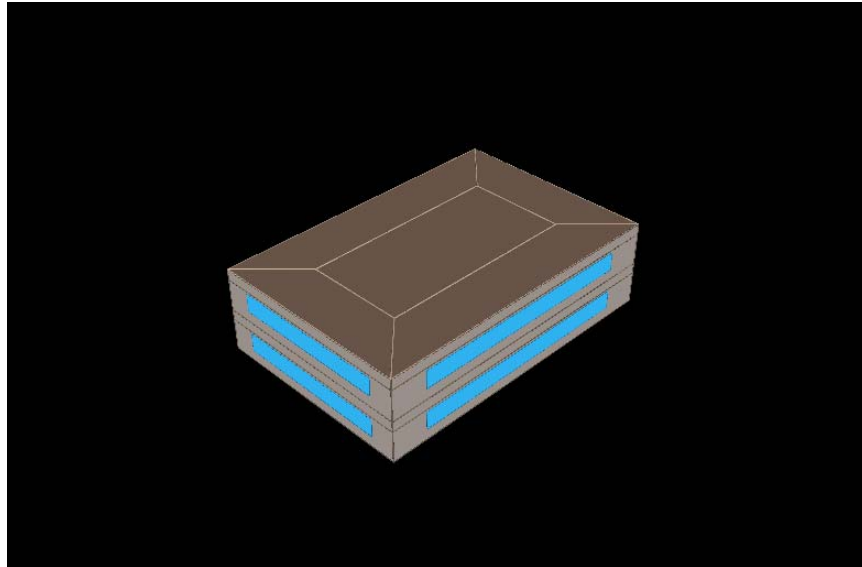

**Figure 10. Small Office Prototype Building Rendering**

#### Small Retail


A prototypical building energy simulation model for a small retail building was developed using the DOE-2.2 building energy simulation program. The characteristics of the small retail building prototype are summarized in Table 20.

**Table 20. Small Retail Prototype Description**

Characteristic	Value
Vintage	Existing (1970s) vintage
Size	6400 square foot sales area 1600 square foot storage area 8000 square feet total
Number of floors	1
Wall construction and R-value	Concrete block with brick veneer, R-7.5
Roof construction and R-value	Wood frame with built-up roof, R-13.5
Glazing type	Multipane; Shading-coefficient = 0.84 U-value = 0.72
Lighting power density	Sales area: 2.15 W/SF Storage area: 0.85 W/SF (Active) 0.45 W/SF (Inactive)
Plug load density	Sales area: 1.2 W/SF Storage area: 0.2 W/SF
Operating hours	10 – 10 Monday-Saturday 10 – 8 Sunday
HVAC system type	Packaged single zone, no economizer
HVAC system size	Based on ASHRAE design day conditions, 10% over sizing assumed.

Characteristic	Value
Thermostat setpoints	Occupied hours: 75 cooling, 70 heating Unoccupied hours: 80 cooling, 65 heating

A computer-generated sketch of the small retail building prototype is shown in Figure 11.

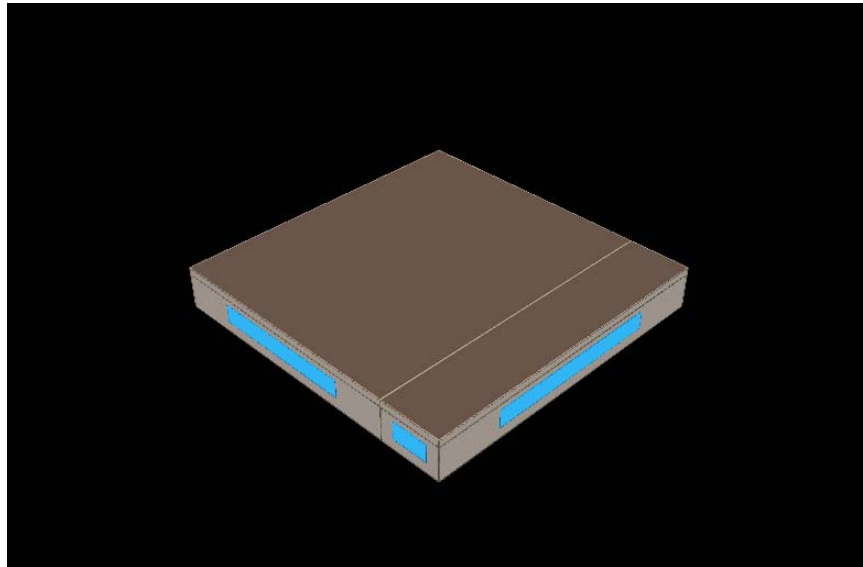

**Figure 11. Small Retail Prototype Building Rendering**

### Weighting of Results

The simulation models provide results at a level of detail that sometimes surpass the normal data collection procedures from customer incentive applications and other EDC data collection. Thus, weights were assigned to individual simulation results, and the weighted averages were reported in the TRM sections where the added complexity of using building type-specific factors was unwarranted. The weights used for analysis were derived from Duke Energy data.

For the commercial building analysis, the weights assigned to each of the building types are shown below:

**Table 21. Commercial Building Type Weights**

Building Type	Weight
Assembly	0.118
Big Box	0.017
Fast food	0.017
Full Service	0.042
Light industrial	0.008
Primary school	0.059
Small office	0.176
Small retail	0.563

Note, the large office and grocery store models were used to analyze specific measures unique to the HVAC system and equipment types used in these buildings. Results relevant to these building types were reported separately and not included in the weighted averages.



<b>Rate</b>	
<b>Gas Utility &amp; Account Number</b>	
<b>Meter Number</b>	
<b>Annual Gas Energy Use on Affected Meter</b>	Pre-installation Annual Consumption Therms:
<b>Rate</b>	

Add rows as needed to provide the necessary information regarding any other energy sources are affected by this project (ie. Fuel oil or renewable energy)

<b>Principal Customer Contact Name</b>	
<b>Title</b>	
<b>Phone</b>	
<b>Email</b>	
<b>Utility Representative Name</b>	
<b>Title</b>	
<b>Phone</b>	
<b>Email</b>	
<b>Custom Energy Analyst Contact Name</b>	Technical lead for this custom analysis.
<b>Title</b>	
<b>Company</b>	
<b>Phone</b>	Office:                      Cell:
<b>Email</b>	
<b>Mailing Address</b>	
<b>Additional Project Contact</b>	
<b>Role</b>	
<b>Title</b>	
<b>Company</b>	
<b>Phone</b>	
<b>Email</b>	

**Add lines as needed**

### Project Description

Describe the project and how it saves energy. Complete the following Project Savings Summary table based on the results of the savings analysis per Section D below.

**Table 23 – Project Savings Summary**

Measure Number	Measure Name	Electric Energy Savings (kWh/yr)	Coincident Demand Savings (kW)	Gas Savings (therms/yr)	Other Fuel Impacts
1					
2					

Measure Number	Measure Name	Electric Energy Savings (kWh/yr)	Coincident Demand Savings (kW)	Gas Savings (therms/yr)	Other Fuel Impacts
3					
Total Savings for All Measures					

Add information regarding other fuel impacts if the project impacts unregulated fuels such as fuel oil, renewable, etc. and indicate units in the header. Delete columns that are not applicable to the project, except electric efficiency projects must include Electric Energy and Coincident Demand columns. Add rows as needed to address all measures associated with the project. Show any increases in energy as a result of the project as a negative number (negative savings).

## B. Measure Information

Document the following information for each project measure. Duplicate Section B for each unique measure. Include all information necessary to describe the equipment and how it operates, including manufacturer's information. Reference case studies of similar systems wherever possible. Reference supporting documentation in the Documentation Summary Worksheet. Duplicate the following sections as needed.

### Measure Number and Name

### Measure Description

Describe the new technology, measure, and/or change in operations, and how it saves energy.

### Measure Performance in Comparison with Relevant Codes and Standards

Document the relevant efficiency codes or federal/state/local standards that apply to the proposed efficient equipment and the ratings of the measure equipment in comparison with applicable standards.

### Additional Benefits

If the efficient measure was the result of a process improvement that provides additional benefits, such as waste reduction, clearly describe all of the ways that the new process saves energy and resources. This can include reductions in areas such as waste heat, O&M costs, labor costs, water consumption, or process waste.

### Baseline Description

Describe the baseline condition. Reference the TRM requirements. Complete Documentation Summary Worksheet to document industrial process baselines for retrofit projects.

### Relevant Codes and Standards

For New Construction and Equipment Replacement Projects the Baseline is the applicable code and/or standard. Clearly cite the reference code or standard used to

establish baseline efficiency levels including year of issue, chapters or sections referenced for the project and the specific requirements of the code and/or standard and how it was applied in the project analysis. If this information is fully documented under Section B.1.1, reference that section here.

## **Measure Variables**

Describe the variables that impact project energy use, the impacts of the measure on any of the variables and how the values for the variables and energy use were established. Common variables are listed below, add or delete as needed to accurately describe the variables associated with the measure. Add quantitative information regarding the project variables in Table 24 - Measure Variables. Document all equipment information for the sections below using the Documentation Summary Worksheet.

## **Equipment Loading**

Describe the equipment loading, variations in loading, percent loading and load profiles during the performance hours.

## **Operating Conditions**

### **Seasonal and Daily Variability in Schedule**

Describe any seasonality that affects the measure (production, school schedules, etc.) Provide documentation of data sources and assumptions used in the analysis.

### **Production**

For industrial process measures, document units of production used for baseline and efficient cases, product variations included and the daily and seasonal variation in production.

### **Weather**

Describe any weather dependence of the measure.

### **Controls**

Describe equipment controls, any differences in baseline and efficiency case controls and how control sequences are accounted for in the analysis.

## **Interactive Effects**

Describe interactive effects including waste heat, additional heating required and interactions with other measures or systems that will impact energy consumption.

## **Measure Life**

State recommended measure life and reference for basis of recommendation.



**Table 24 - Measure Variables**

Variable	Applies (Y/N)	Values Used and Engineering Units	Source (eg. metering, customer interview, production log, etc.)
Equipment Loading			
Operating Schedules			
Production Schedules			
Occupancy Schedules			
Weather			
Production			
Controls			
Interactive Effects			

## C. Metering and Data Collection

Prepare a metering plan for the project using this section of the document and indicating the intended analysis approach in Section D. Upon completion of metering and analysis, update this document to reflect actual findings and final analysis approach.

### Metering Approach

Discuss the approach to energy and demand metering including load shape and coincident demand determination from meter data. Describe when metering occurred and how it is deemed to represent the post installation, annual operating conditions. Provide justification and supporting documentation for all assumptions and metering techniques using the Documentation Summary Worksheet.

### Data Collection Methodology

Indicate the primary method(s) used to obtain the data needed for TRM Section 2 equations.

**Power Metering** \_\_\_\_\_

**Data logging** \_\_\_\_\_

**DDC/PLC** \_\_\_\_\_

**Interval Data** \_\_\_\_\_

**Customer Interview** \_\_\_\_\_

Other (describe) \_\_\_\_\_

**Table 25 - Project Data Acquisition**

<b>Data Collection Method [1]</b>			
<b>When data was collected (pre/post) installation</b>			
<b>Measure(s) Affected</b>			
<b>Equipment monitored</b>			
<b>Parameter measured</b>			
<b>Measurement equipment</b>			
<b>Observation frequency</b>			
<b>Metering duration</b>			
<b>Sensor type</b>			
<b>Accuracy of sensors</b>			
<b>Overall accuracy of meter system</b>			
<b>Verify whether meter was synchronized to NIST</b>			

[1] Indicate data collection method(s) across the top; not all rows apply for all data collection methods. Duplicate table as needed to capture all data collection methods used for the measures associated with this project

#### **Equipment Calibration**

Discuss calibration procedures used to maintain calibration of any metering and/or logging equipment used in the metering process. Where DDC and/or PLC devices and systems were used to obtain project data, describe the calibration protocol and document the results in the Documentation Summary Worksheet.

#### **Data Cleaning and Data Reduction**

Discuss steps taken to align timestamps, fill gaps in raw data and address other data issues such as inaccurate or inconclusive readings. Depending on the level of verification required by the program, include raw, cleaned, and analyzed datasets as appropriate in the Documentation Summary Worksheet.

## D. Energy and Demand Analysis

### Energy and Demand Analysis Approach

Describe the energy and demand savings calculation approach for each measure. Present formulae; the basis for each variable should be documented in Sections B and C above. If modeling is used, describe the simulation tool and modeling approach. Describe the approach to determining the coincident demand savings for electric efficiency measures. All project and measure analysis documentation shall be submitted as part of the project documentation in the Documentation Summary Worksheet.

### Calculation Methods

Describe the calculation methods and tools used to develop the savings analysis for the project. Include a discussion of how interactive effects were handled in the analysis. Refer to the TRM for more details on interactive effects.

### Computer Modeling

Describe the approach to computer modeling, software used including, year, version and source, the modeling parameters addressed and the confidence in the model results relative to predictions of annual energy use reduction. Document the software year, version, source, and supporting documentation for software algorithms in the Documentation Summary Worksheet.

### Energy and Demand Savings Analysis

Complete this section for each of the measures named above in accordance with Sections 2 through 4 of the C&I Custom Measure TRM for Retrofit and/or Equipment Replacement and report the final results in the Projects Savings Summary in Section A above. Perform the savings analysis according to the following algorithm.

Step 1. Enter the system description and conditions into Table 27 using the example below as a guide. Include all modes of operation that occur throughout the course of a year. For variable loads and schedules, enter 'variable' in the Hours, Coincidence Factor, and Load Factors columns.

**Table 26 - System Conditions Example**

j	subsystem	annual hours	CF coincidence factor	system mode	full load kW	LF load factor
1	compressors	700	variable	max	10	variable
2	compressors	1500	variable	unloaded	10	variable
3	bank 1 and 2 cooling tower fans	700	variable	max	8	variable
4	bank 1 only cooling tower fans	1500	variable	unloaded	4	variable
5	condenser water pump	2200	1.00	max	20	1.00
6	condenser water pump	2200	1.00	unloaded	20	1.00

**Table 27 - System Description - Measure 1**

J	Subsystem	Hours	Coincidence Factor	System mode	Full load kW [1]	Load Factor [2]
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						

[1] Nameplate kW.

[2] Typically less than 1.00 unless the equipment was sized to run at full speed.

Step 2. Use the equations in TRM Section 2 to calculate the following quantities in Table 28 - Calculated Energy Consumption and Demand Summary below: **Energy<sub>eff</sub>**, **Energy<sub>base</sub>**, **C Load<sub>eff</sub>**, **C Load<sub>base</sub>** and the corresponding savings **Energy<sub>saved</sub>** and **C Load<sub>saved</sub>**. Where the Hours, Coincidence Factor, and Load Factor are variable in Step 1 above, such as for weather dependent systems or other variable loads and schedules, a comprehensive 8760 analysis approach is required for affected terms in the equations. For subsystems 'J' which are constant and fully defined in the table above, it is acceptable to calculate these terms directly without using an 8760 analysis.

**Table 28 - Calculated Energy Consumption and Demand Summary [1]**

	Baseline Case	Efficient Case	Annual Energy Savings	Notes
<b>Measure 1</b>				
Annual Energy Use Electric				
Coincident Electric Demand				
Annual Gas Use				
<b>Measure 2</b>				
Annual Energy Use Electric				
Coincident Electric Demand				
Annual Gas Use				

[1] Add rows for additional measures and for reporting impacts on unregulated energy sources. Indicate NA if a listed energy source is not affected. Electric measures must have both energy and coincident demand analysis completed.

## E. Additional Information

Provide supporting documentation for all information referenced in Section E using the Documentation Summary Worksheet.

### Project Cost

Document the cost of each measure by supplying electronic copies of quotes and invoices. For equipment replacement and new construction projects, the measure cost is the incremental cost above the baseline equipment. For retrofit projects the cost is inclusive.

**Table 29 - Calculated Cost [1]**

	Baseline Case (leave blank for Retrofit)	Efficient Case	Incremental Cost of Efficient Measure (total inclusive cost for Retrofit)	Notes
Measure 1				
Measure 2				
Measure 3				

[1] Add rows for additional measures.

### Non-energy Impacts

Document the non-energy impacts of the project such as impacts on O&M, water consumption etc. and the costs associated with those impacts.

### Uncertainty

Discuss sources of uncertainty in energy use and demand reduction calculations other than metering error. Address assumption and potential impact of deviations in actual conditions from assumed conditions on energy savings. Discuss deviations from the original metering plan and quantify the impacts on the calculated savings.

### Accuracy

The overall engineering accuracy of this analysis is: +/- \_\_\_\_\_ %

### Signature of Energy Analyst

---

### Date of Submitted Report

---

## Appendix C – Documentation Summary Worksheet for Custom Projects

Appendix A							
Documentation Summary Worksheet for Custom Projects							
Instructions:							
1. Documentation is required for all sections and subsections shown in Columns A - C. Add rows as needed in order to completely document the project according to the requirements of the applicable Custom TRM and the Custom Analysis Template.							
2. Indicate by "X" in columns D & E whether the documentation applies to the Baseline, Efficient or Both cases.							
3. Indicate the measures to which the documentation applies in Column F, such as "M-1, M-2..." . Use "P" for documentation that applies to the overall project.							
4. Indicate filenames of submitted documents in Column H. Include the measure number in the filename.							
5. Provide files listed in this table in electronic format with the project submission.							
Documentation Requirements			Case to which documentation applies		Measure(s) to which documentation applies	Description	Filename with Extension (.pdf, .xlsx, .inp, etc.)
Section	Category	Subcategory	Efficient	Baseline			
<b>Section A - Project Information</b>							
	Custom Analysis Template						
<b>Section B - Measure Level</b>							
	Reference Data and Studies						
		Applicable Codes or Standards					
		Case Studies and Industry Standards					
		Applicant Practice (Industrial Retrofit)					
	Equipment Specific Information						
		Manufacturer Performance Data					
		Nameplate Data					
		Operating Variables					
		Field Metered Load Data					
<b>Section C - Metering and Data Collection</b>							
	Metering Techniques						
	Calibration Logs (DDC)						
	Metering Datasets						
		Analyzed					
		Raw†					
		Cleaned†					
<b>Section D - Energy and Demand Analysis</b>							
	Analysis Files						
		Modeling Files					
		Calculations Spreadsheets					
	Savings						
		Savings Analysis Calculations					
		Savings Equations Source					
<b>Section E - Additional Information</b>							
	Project Costs						
	Non-Energy Impacts						

† Raw and Cleaned datasets are not typically required for savings claims. However, they should be available to Program Evaluation staff if requested.

Appendix A							
Documentation Summary Worksheet for Custom Projects							
EXAMPLE:							
Documentation Requirements			Case to which documentation applies		Measure(s) to which documentation applies	Description	Filename with Extension (.pdf, .xls, .doc, .jpg other)
Section	Category	Subcategory	Efficient	Baseline			
Section A - Project Info							
	Custom Analysis Template				P	Template for Chiller project	CAT_Chiller_Date.doc
Section B - Measure Level							
	Reference Data and Studies						
		Applicable Federal Standards	x	x	M-1	ASHRAE 90.1-2004	ASHRAE90.1_M-1.pdf
		Applicable Local Codes	x	x	M-1	Vermont Guidelines 2005	VTG2005_pp10-15_M-1.pdf
		Case Studies and Industry Standards		x	P	ACEEE study	ACEE Study_Base_Eff.pdf
	Equipment Specific Information						
		Manufacturer Performance Data - Efficient Model	x		M-1, M-4	Cut sheet compressor efficiency and EWT performance; pump part load efficiency	MFR_M-1_EFF.pdf, MFR_M-4_EFF.pdf
		Manufacturer Performance Data - Baseline Model		x	M-1, M-4	Cut sheet compressor efficiency and EWT performance; pump part load efficiency	MFR_M-1_BASE.pdf, MFR_M-4_BASE.pdf
		Nameplate Data	x			Photo of installed nameplate	Efficient_Nameplate_M-1.jpg
		Operating Variables - schedule	x		P	Occupied and unoccupied operating schedules	Eff_sched_Base_Eff.doc
		Operating Variables - part load curves	x		M-1	Compressor part load curves	Part_Load_kW_M-1.pdf
		Field Metered Load Data	x	x	P	Compressor, condenser fans, EWT, pump speed field data	Field_Data_Baseline_and_Efficient.xls
Section C - Metering and Data Collection							
	Metering Techniques		x				
	Calibration Logs (DDC)		x				
	Metering Datasets						
		Raw	x	x	P	Baseline and efficient raw data: compressor, condenser fans, pump speed	RAW_base_eff.xls
		Cleaned	x	x	P	Baseline and efficient cleaned data: compressor, condenser fans, pump speed	CLEANED_base_eff.xls
		Analyzed	x	x	P	Data used in analysis: compressor, condenser fans, pump speed	ANALYZED_base_eff.xls
Section D - Energy and Demand Analysis							
	Analysis Files						
		Modeling Files	na	na	-	Analysis spreadsheets used in lieu of modeling software	
		Calculations Spreadsheets	x	x	P	Baseline and Analysis calculations (ref. TRM Section 2 equations)	baseline_calcs.xls, efficient_calcs.xls
	Savings						
		Savings Analysis Calculations	x	x	P	Savings calculations (ref. TRM Section 4 equations)	savings_calcs.xls
		Savings Equations Source	x	x	P	AEE study with equations	AEE_chiller_savings_equations.pdf
Section E - Additional Information							
	Project Costs		x		P	Invoices	invoices.pdf
	Non-Energy Impacts		na	na		There were no non-energy impacts	

## Appendix D – TRM Maintenance and Update Process

The Ohio Technical Reference Manual is designed to be a living document – it will benefit from an objective and thoughtful update process. Defining a process that coordinates with the needs of users, evaluators, and regulators is critical. Below we outline a process for the update of information and recommendations on the coordination of the timing of this process with other critical activities.

### Proposed TRM Update Process

Once a TRM has been developed, it is vital that it is kept up to date, appended, and maintained in a timely and effective manner. There are three main points in time when a TRM is most likely to require changes:

- New measure additions – As new technologies become cost effective, they will need to be characterized and added to the manual. In addition, new program delivery design may result in the need for new measure characterization.
- Existing measure updates – Updates will be required for a number of reasons. Examples include: the federal standard for efficiency of a measure is increased; the qualification criteria are altered; the measure cost falls; or a new evaluation provides a better value of an assumption for a variable. In addition, as programs mature, characterizations need to be updated as changes in the market require changes in calculation assumptions. In such cases, these changes must be identified and appropriate changes made to the TRM.
- Retiring existing measures – When the economics of a measure become such that it is no longer cost effective, or the free rider rate is so high that it is not worth supporting, the measure should be retired.

It is important to maintain a record of changes made to the TRM over time. It is therefore recommended to establish and maintain a Master Manual, containing all versions of each TRM in chronological order, and an abridged User Manual, in which only the current versions of active measures are included. Archiving older information in this fashion can be designed into the electronic interface (if developed), and only the current version of the User Manual is publically available on the site.


The flowchart presented below outlines steps that will result in effective review and quality control for TRM updates. One critical component is the establishment of a Technical Advisory Group (TAG) to provide a forum for discussing and resolving technical concerns.

This process requires a number of different roles to ensure effectiveness, sufficient review, and independence. The specific parties who will hold these roles in the Ohio TRM maintenance context will be clarified in discussion with the Commission. The following list of key responsibilities is given as a starting place for this conversation:

- Program administrators / utilities (consultants)
  - Identifies need for new or revised measure characterization – usually due to program changes or program/market feedback
  - Researches and develop first draft measure characterizations – for needs that the utilities identify
  - Develops second draft measure characterizations following feedback on first draft from all parties
  - Gives feedback on draft measure characterizations from other parties
  - Participates in Technical Advisory Group (TAG) for formal discussion and dispute resolution when needed
  - Gives input to regulators if TAG process does not resolve all issues



## Flowchart for Proposed TRM Update Process

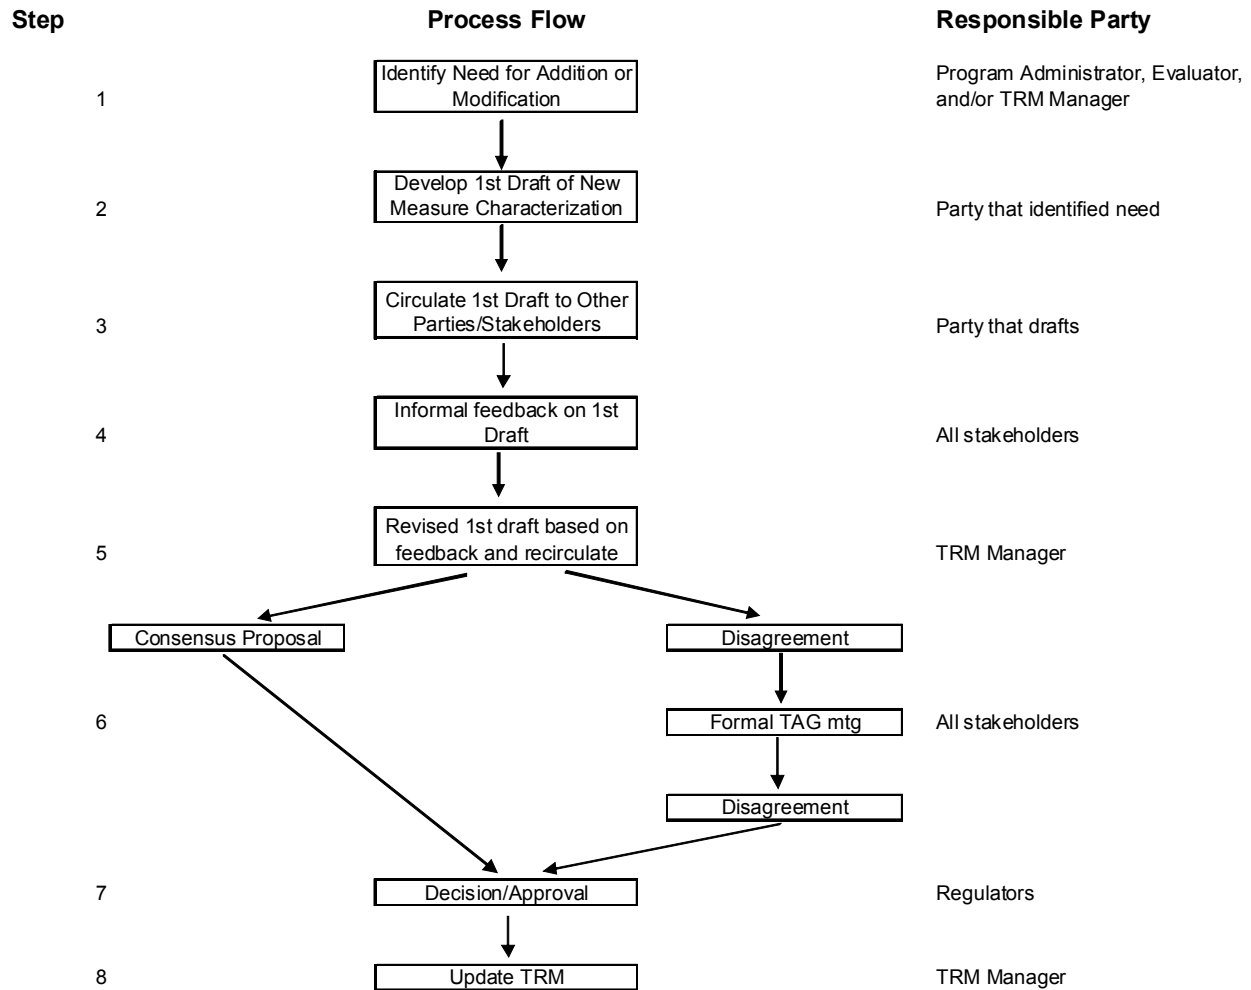

- Independent TRM Manager (Consultant)
  - Identifies need for revised measure characterization (usually based on knowledge of local or other relevant evaluation studies)
  - Researches and develops first draft measure characterizations – for needs identified either by itself or Evaluation consultant
  - Gives feedback on first draft measure characterizations from other parties
  - Develops second draft measure characterizations following feedback on first draft from all parties
  - Leads Technical Advisory Group (TAG) for formal discussion and dispute resolution when needed
  - Provides input to regulators if TAG process does not resolve all issues

- Makes recommendation for TRM revision to PUCO
- Manages and updates TRM manuals (after PUCO approval of changes)
- Third-party Evaluation consultant
  - Identifies need for revised measure characterization (usually based on local evaluation studies it has conducted or managed)
  - Input on draft measure characterizations developed by other parties
  - Participates in TAG meetings when appropriate
  - Performs program evaluation - includes statewide market assessment and baseline studies, savings impact studies (to measure the change in energy and / or demand use attributed to energy efficiency), and other energy efficiency program evaluation activities
  - Verifies annual energy and capacity savings claims of each program and portfolio
  - Ensures proper utility use of TRM in annual savings verification process
- Commission staff
  - Hires and manages TRM and Evaluation consultant(s)
  - Approves any changes to TRM – includes serving as final arbiter in any disagreements between utilities and TRM consultant

The process outlined above also assumes that there are several potential stages of “give and take” on draft modifications to the TRM. At a minimum, there is at least one round of informal feedback and comment between the program administrators and the independent reviewer (TRM Manager or otherwise). Other parties could be invited to participate in this process as well. In the event that such informal discussions do not resolve all issues, the participants may find it beneficial to establish a Technical Advisory Group (TAG) to provide a more formal venue for resolution of technical disputes prior to any submission to the regulators. This group would include representation from the program administrators, the evaluators (when deemed useful), the TRM Manager, and Commission staff. The mission of such a group would be to discuss and reach agreement on any unresolved issues stemming from new measure proposals, savings verifications, or evaluations. They could also review and comment on the methodology and associated assumptions underlying measure savings calculations and provide an additional channel for transparency of information about the TRM and the savings assessment process.

## Coordination with Other Savings Assessment Activities

As drafted, the Ohio Administrative Code requires the Commission/Staff to report whether an electric utility’s or mercantile customer’s actions match their proposed program portfolio; whether the utility’s or mercantile customer’s proposed program portfolio would produce actual savings; and whether actual savings were achieved. Although the TRM will be a critically important tool for both DSM planning and estimation of actual savings, it will not, by itself, ensure that reported savings are the same as actual savings. There are two principal reasons for this:

1. **The TRM itself does not ensure appropriate estimation of savings.** One of the responsibilities of the Independent Program Evaluator will be to assess that the TRM has been used appropriately in the calculation of savings.
2. **The TRM may have assumptions or protocols that new information suggests are outdated.** New information that could inform the reasonableness of TRM assumptions or protocols can surface at any time, but they are particularly common as local evaluations or annual savings verification processes are completed. Obviously, the TRM should be updated to reflect such new information. However, it is highly likely that some such adjustments will be made too late to affect the annual savings estimate of a utility or mercantile customer for the previous year, particularly given the PUCO’s interim decision to not adjust savings estimates retroactively (TRM Entry Appendix A). Thus, there may be a difference between savings estimates in annual compliance reports and the “actual savings” that the PUCO may consider acceptable from a regulatory perspective. However, such updates should be captured in as timely a fashion as possible.

These two issues highlight the fact that the TRM needs to be integrated into a broader process that has two other key components: an annual savings verification process and on-going evaluation.

Savings verification ensures that information is being tracked accurately and in a manner consistent with the TRM. However, as important as it is, verification does not ensure that reported savings are “actual savings”. TRMs are never and can never be perfect. Even when the verification process documents that assumptions have been appropriately applied, it can also highlight questions that warrant future analysis that may lead to changes to the TRM. Put another way, evaluation studies are and always will be necessary to identify changes that need to be made to the TRM. Therefore, in addition to annual savings verification processes, evaluations will periodically be made to assess or update the underlying assumption values for critical components of important measure characterizations.

In summary, there should be a strong, sometimes cyclical relationship between the TRM development and update process, annual compliance reports, savings verification processes, and evaluations. As such, we recommend coordinating these activities. A preliminary timeline established from such a coordinated process is given in the table below.

### Annual Verification and TRM Update Timeline

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Utility	Draft annual savings report		No TRM submittal during SV				Draft new or updated measure characterizations developed and submitted to TRM Manager; participate in TAG					
				SV response		Prior year data finalized	Technical Advisory Group (TAG) negotiations and evaluation					
Evaluator			Savings verification (SV)									
			No TRM review during SV				Refers need for TRM updates to TRM Manager; provides input on characterizations					
TRM Manager			No TRM during savings verification				Propose/develop new or updated measure characterizations; review drafts provided by utilities; participate in TAG					
PUCO						Make final savings determination	Participate in TAG meetings; approve final TRM					

In this example, it is assumed that updates to the TRM occur only in the second half of the year. One option is to establish two specific update deadlines: one in September and the other at the end of December. The first would ensure that the best available data are available for utility planning for the following year. The second would ensure that best available assumptions are in place prior to the start of the new program year. In general, we would expect the number of additions or revisions in the September TRM update to be much greater than the number in December. Nevertheless, providing for two rounds of TRM review each year gives the opportunity to have updated savings assumptions reviewed and approved more often, reducing the time that a program administrator might be at risk of providing services using not-yet-approved measure characterizations. The rationale for not updating the TRM during the first half of the year is that time is usually devoted, in part, to documenting, verifying and approving savings claims from the previous year. For example, the program administrator will likely require two months to produce its annual savings claim for the previous year. An independent reviewer will then require two to three months to review and probe that claim, with considerable back and forth between the two parties being very

common. Typically, final savings estimates for the previous year are not finalized and approved until mid-year. Program administrators and evaluators would be unlikely to have the time or focus for considering changes to measure characterizations during this time.